GREENPRO®

ENJOY THE WARMTH
OF LIFE

享受温暖的生活！

ZHEJIANG WIGO PUMP CO.,LTD

Add:NO.2 SHENGDA ROAD, ZEGUO TOWN, WENLING,
TAIZHOU, ZHEJIANG, CHINA.

Tel:0086-576-86353328 / 86353327

Fax:0086-576-86353228

E-mail:info@wigopump.com

www.greenpro.cn

GREENPRO®

PROFESSIONAL
CIRCULATING PUMP MANUFACTURER

专业屏蔽泵制造商

CIRCULATING PUMP SERIES

CE TÜV GS ISO 9001

GREENPRO®

CE GS ISO 9001

GROWTH COURSE

成长历程

since2001-2021

2001—2003
Started from a small factory which produced Booster Pump's spare parts.

2004
Founded Wenling Wigo Pump Factory,and started to produce circulation pumps' spare parts and the whole circulation pumps.

2005—2007
Started to export circulation pumps through trading companies to overseas

2008
Change the name to zhejiang Wigo Pump Co.,Ltd,and started to export circulation pumps by ourself.

2009—2021
Became one of the biggest manufacturer of circulation pumps in China.And annual production capacity is over one million pieces.

GREENPRO®

CE GS ISO 9001

Full-automatic production line

COMPANY PROFILE
企业简介

浙江威格泵业有限公司，创建于1998年，坐落于中国的泵业制造小镇-浙江省温岭市大溪镇。我司专业从事屏蔽泵、壁挂炉专用泵的研发、生产以及出口15年之久，目前年产量已达到150万台。

我司严格按照ISO9001:2015质量管理体系, 依据不同国家和地区的法规，相关产品相继通过了CCC、CQC、GS、CE、RoHS、REACH、TUV ERP等多项认证，以确保产品安全、稳定、可靠、耐用，并符合当地的法律法规要求。

2016年我公司自行研发的全自动安装流水线正式投入生产，从零配件到整体的水泵组装，全部采用机械手。我们目前厂房1万平方米，在建新厂房占地4万平方米，新厂房将增加4条全自动安装生产线，并采用最新技术，立体仓库，数据化的生产管理，以提高整体的生产效率和产品质量的稳定性。

我司作为中国屏蔽电泵行业标准的起草单位，“国家级高新技术企业”和“市重点工业企业20强”矢志不渝的坚持以客户需求为导向，致力于为全世界客户研发、提供高品质的产品和贴心的售后服务。

ZHEJIANG WIGO PUMP CO.,LTD. was established in 1998,located at Zeguo Town, Wenling,Zhejiang Province,is known for the manufacturing of water pumps. We have been dedicatedto research, develop, manufacture and export circulating pumps and pump for wall-hungboilers for 15 years.The annual output is over 1.5 million.

The company operates in strict accordance with IS09001: 2015 management system,meetsthe regulations of different countries. Has obtained CCC,CQC,GS ,CE, RoHS, REACH,TUVERP and other certificates. Those certificates ensure steadiness, reliability, efficiency and durability of our produce quality.

We developed our own full-automatic assembly line and put it into production since 2016,which can assemble each accessory to the whole pump by the manipulator. The current plant covers 10,000 square meters. As for the new plant that is under construction, it covers 40,000 square meters with four additional automatic assembly lines and automatic storage & retrieval system, digital management of production to improvethe production efficiency and quality stability.

As “High-tech enterprise” and “Top 20 Municipal key industrial enterprise” , we are always adhere to pursue perfection, provide the vast clients with best products and more considerate after-sales service.

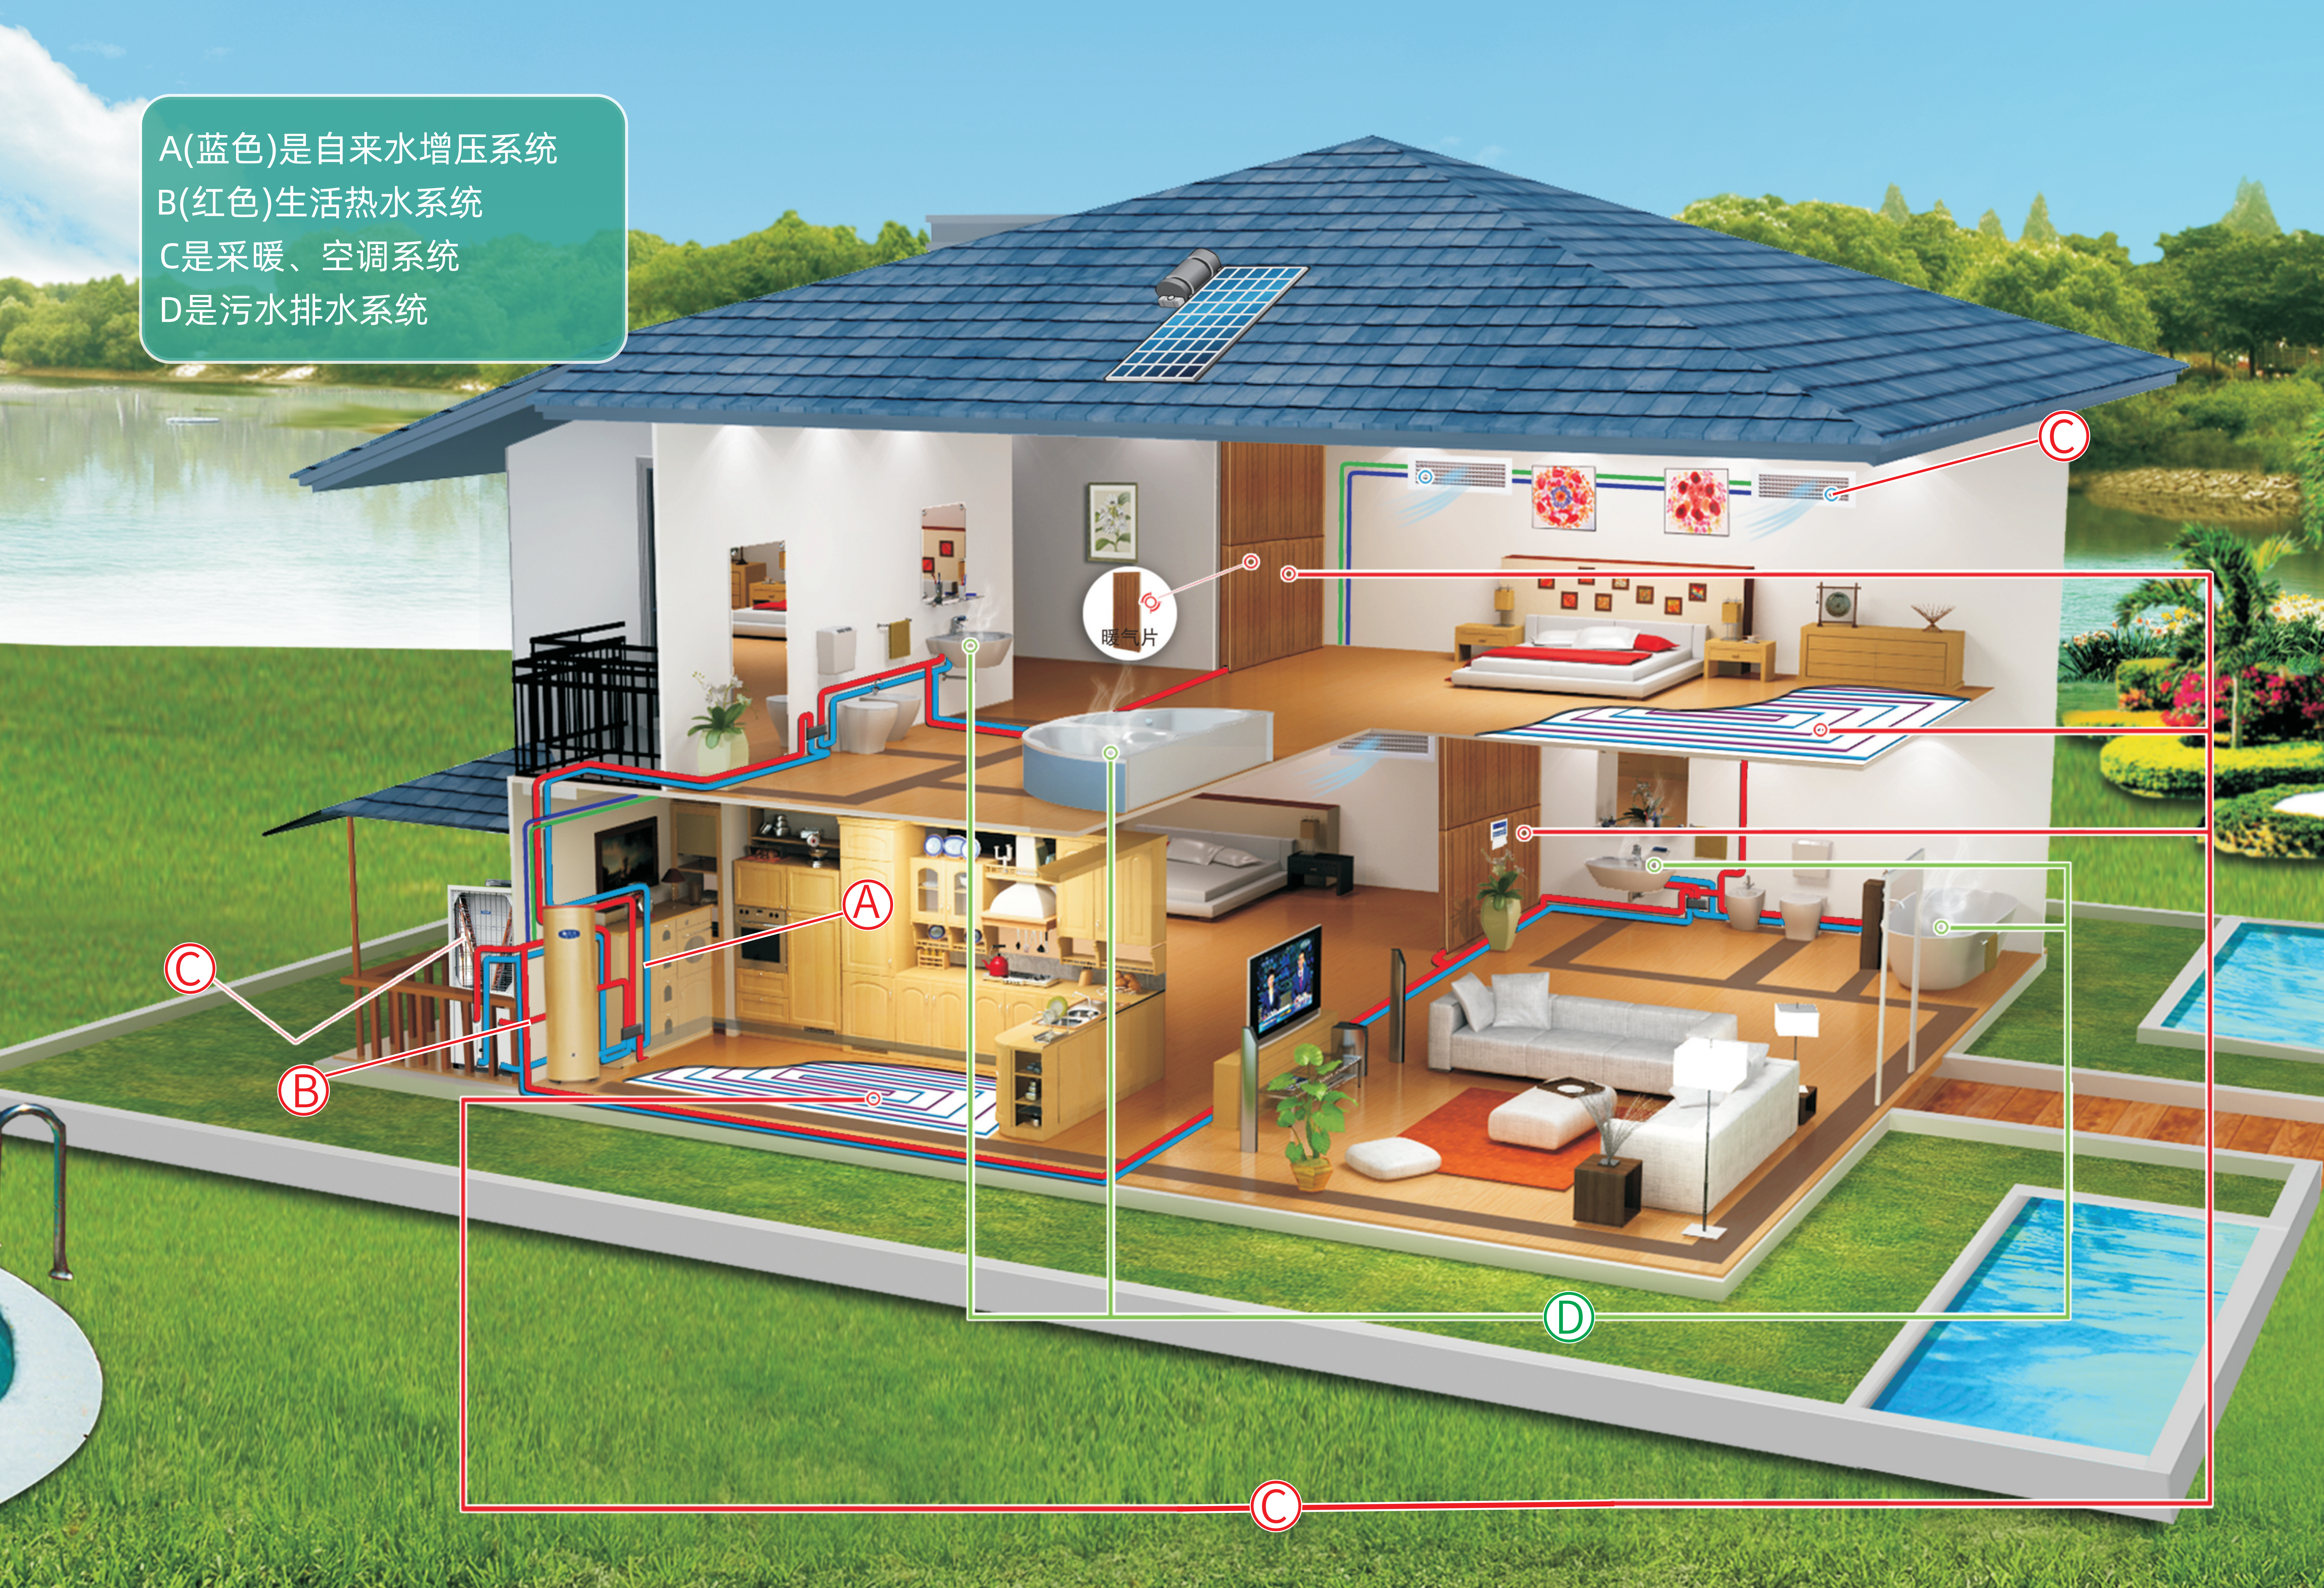
A(蓝色)是自来水增压系统
B(红色)生活热水系统
C是采暖、空调系统
D是污水排水系统
暖气片
A
B
C
C
C
D

CE GS ISO 9001

CERTIFICATIONS
资质证书


产品认证证书

证书编号：CQC11018066349

主任：

中国质量认证中心

0073393


PRODUCT CERTIFICATE

No.: CQC11018066349

NAME AND ADDRESS OF THE APPLICANT

NAME AND ADDRESS OF THE MANUFACTURER

NAME AND ADDRESS OF THE FACTORY

NAME, MODEL AND SPECIFICATION

IN-LINE PUMP

THE STANDARDS AND TECHNICAL REQUIREMENTS FOR THE PRODUCTS

GB10395.8-2006

CERTIFICATION MODEL

President:

CHINA QUALITY CERTIFICATION CENTRE

0073393

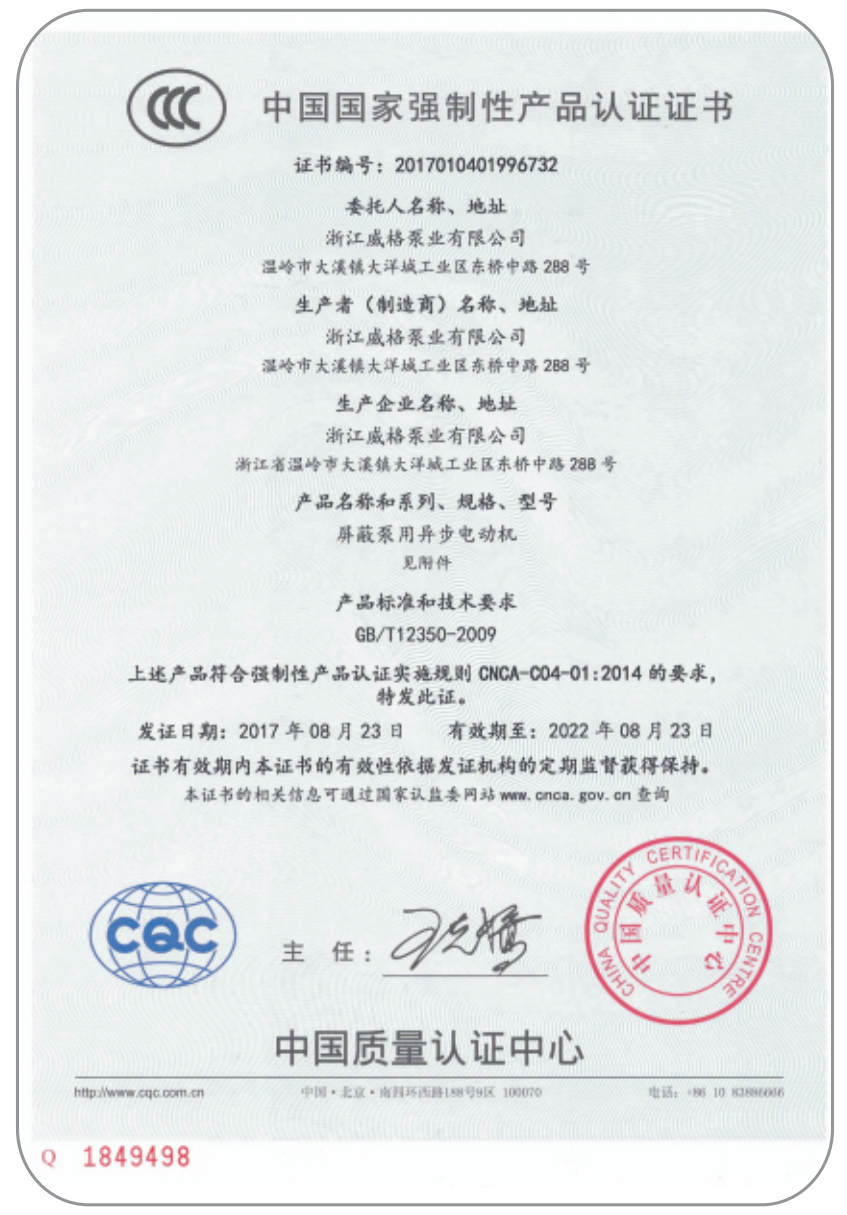
中国国家强制性产品认证证书

证书编号：2017010401996732

GB/T12350-2009

主任：

中国质量认证中心

1849498


DAS CERTIFICATION

质量管理体系认证证书

浙江威格泵业有限公司

浙江省温岭市大溪镇大洋城工业区东桥中路288号

GB/T 19001-2016/ISO 9001:2015

微型电泵的生产、销售和服务

证书号：QWZ18170810

IAF

UKAS


DAS CERTIFICATION

Quality Management System Certificate of Approval

This is to certify that the QMS of

Zhejiang Wigo Pump Co., Ltd.

GB/T 19001-2016/ISO 9001:2015

Production, Sales and Service of Micro Electric Pumps

Certificate Number: QWZ18170810

IAF

UKAS

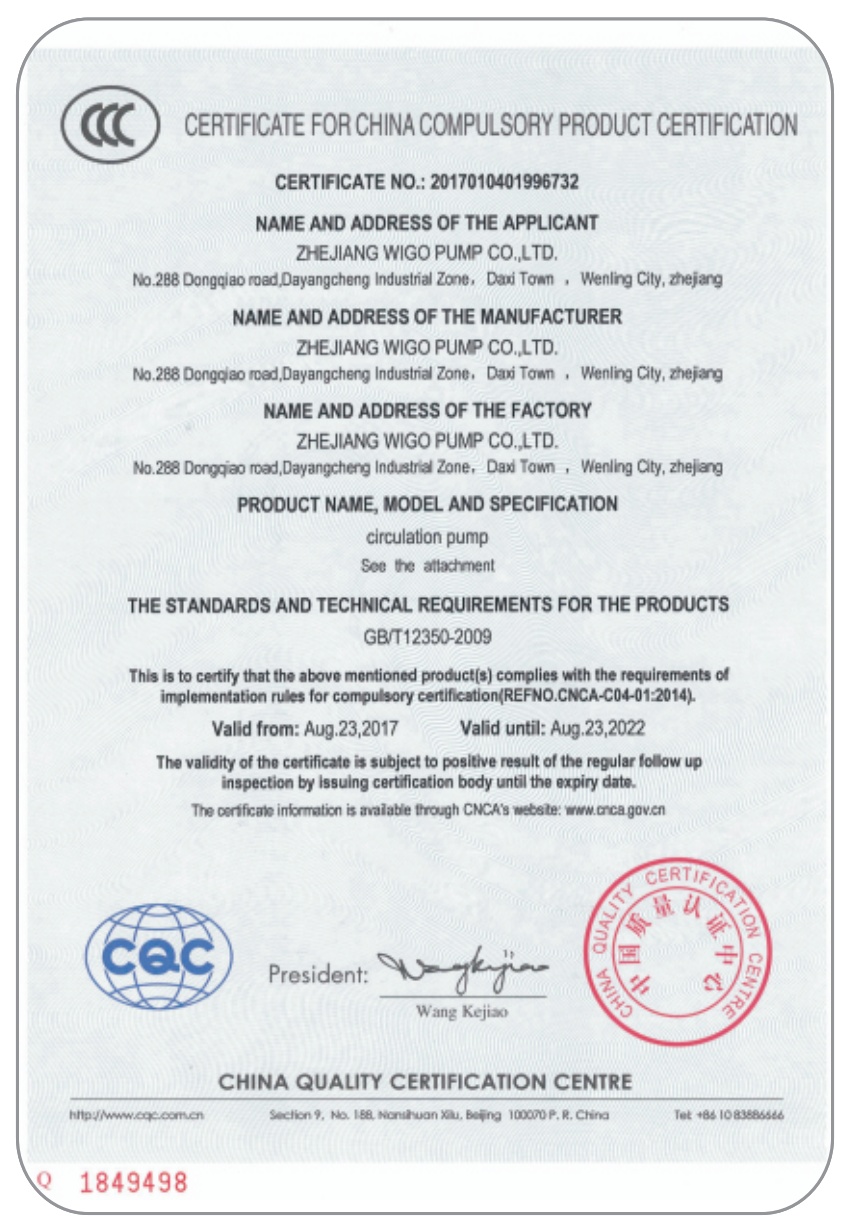
CERTIFICATE FOR CHINA COMPULSORY PRODUCT CERTIFICATION

CERTIFICATE NO.: 2017010401996732

NAME AND ADDRESS OF THE APPLICANT

ZHEJIANG WIGO PUMP CO.,LTD.

NAME AND ADDRESS OF THE MANUFACTURER

ZHEJIANG WIGO PUMP CO.,LTD.

NAME AND ADDRESS OF THE FACTORY

ZHEJIANG WIGO PUMP CO.,LTD.

PRODUCT NAME, MODEL AND SPECIFICATION

circulation pump

See the attachment

THE STANDARDS AND TECHNICAL REQUIREMENTS FOR THE PRODUCTS

GB/T12350-2009

Valid from: Aug.23,2017 Valid until: Aug.23,2022

President:

Wang Kejiu

CHINA QUALITY CERTIFICATION CENTRE

1849498

CONTENTS
产品目录

循环泵
CIRCULATING PUMP

GREENPRO®
CIRCULATING PUMP

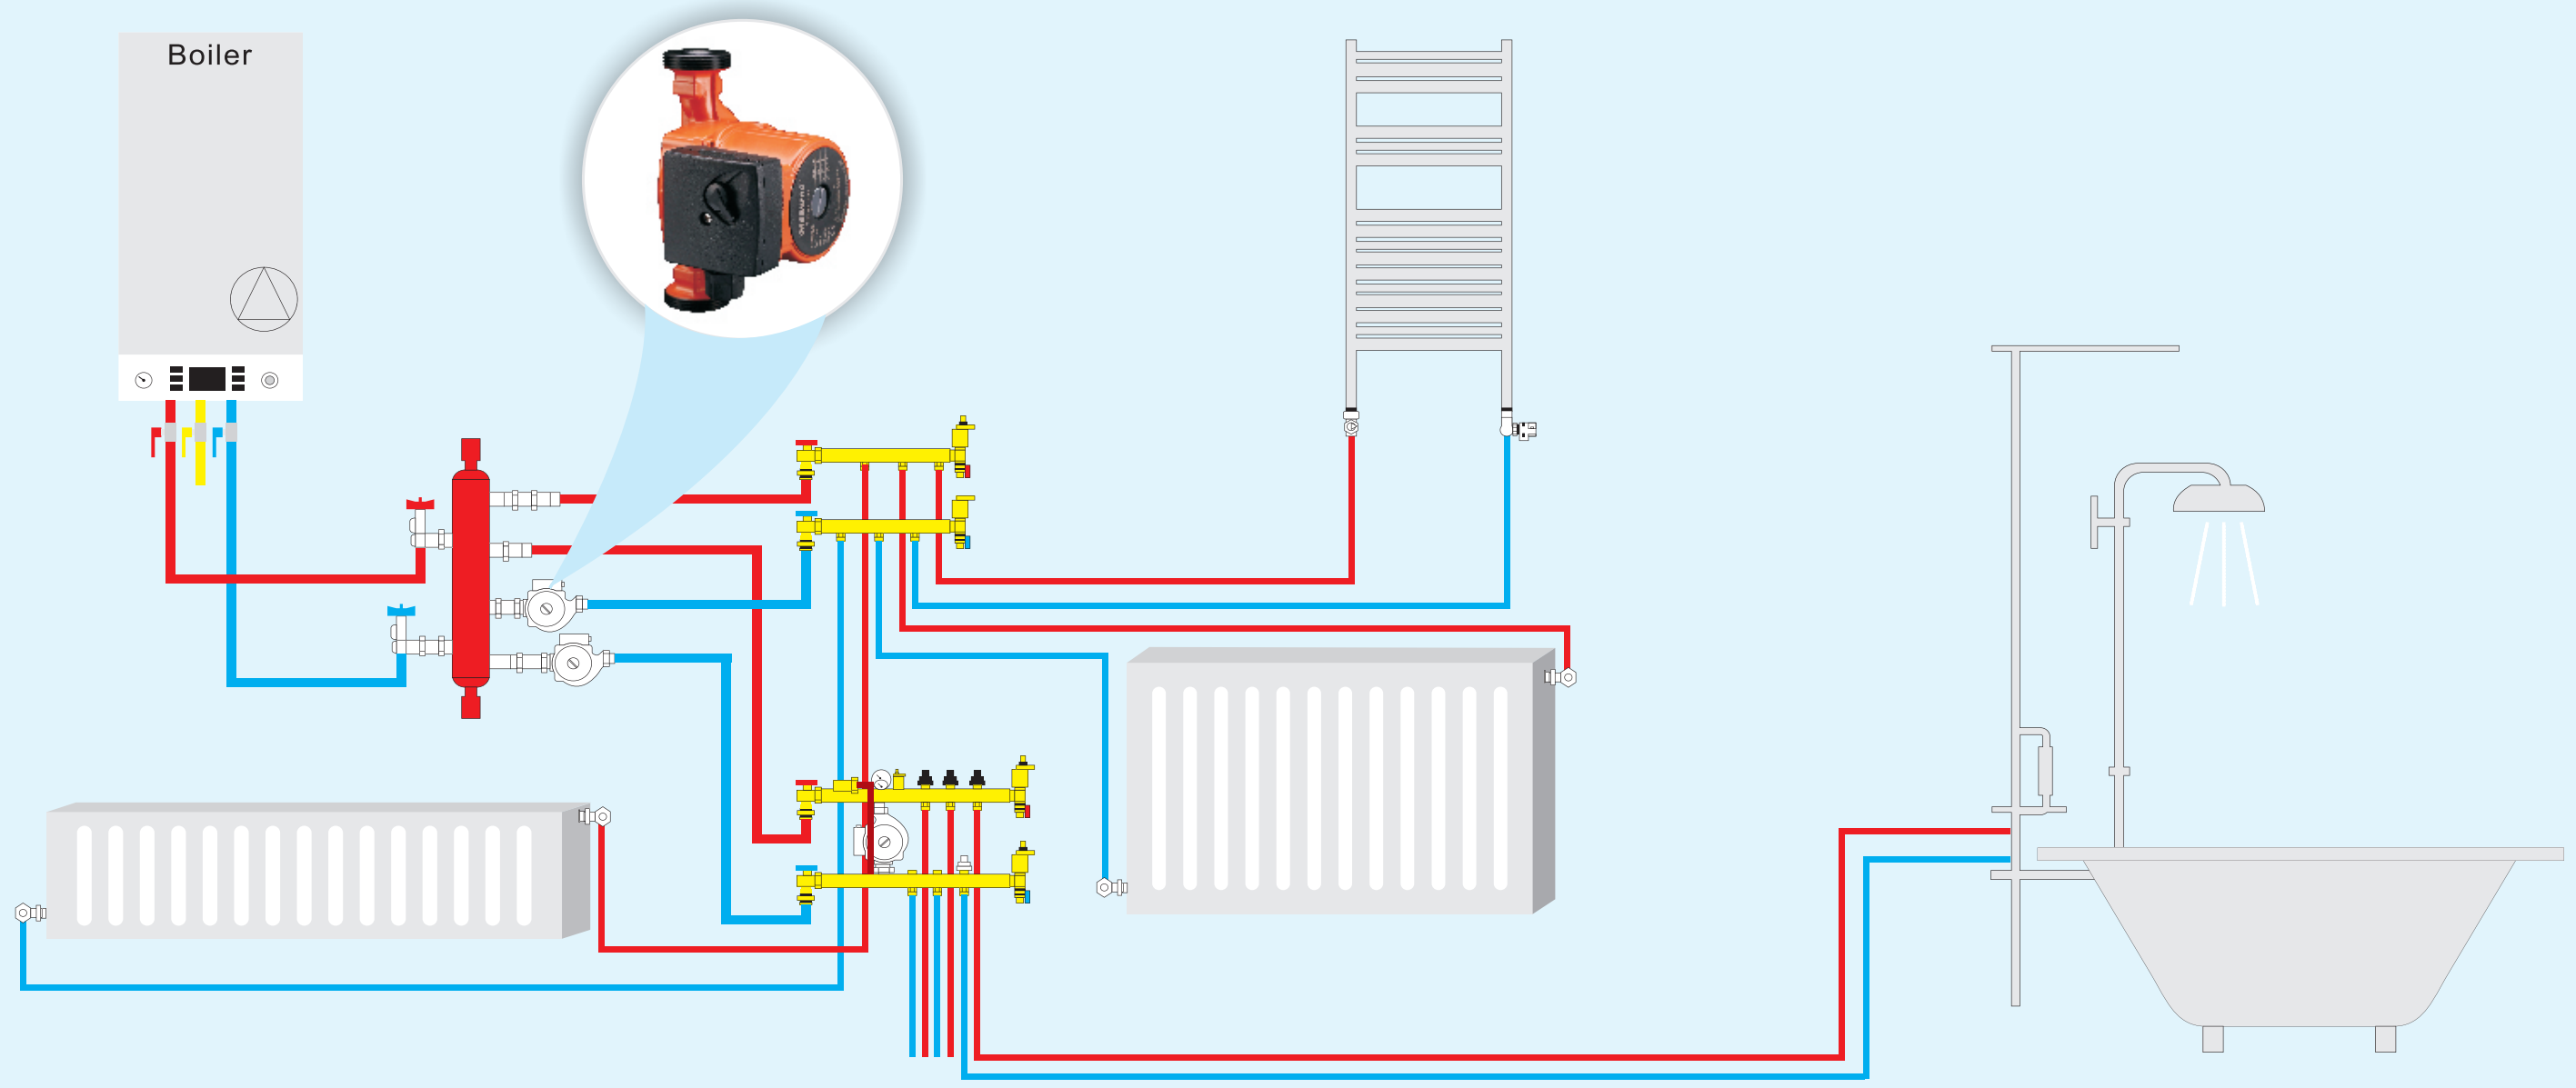

使用环境

1.安装在供暖循环系统
2.最大系统压力：10bar
3.运行条件：
环境温度：0℃~40℃
环境湿度：<95%
液体温度：-10℃~110℃
环境温度低于液体温度，防止电机内部出现冷凝液体
4.液体材质： 非腐蚀性，非易爆液体，不含固体颗粒，纤维以及矿物油。 水：乙醇:1:1
5.使用要求：无水运转不得超过10min

Operation condition:

1. Apply to heating system
2. Max. system pressure:10bar
3. Operation condition:
Ambient Temperature:0℃~40℃
Ambient Humidity:95%
Liquid Tempreture:-10℃~110℃
Ambient temperature must be lower than liquid temperature,
in order to avoid condensate water produced in the interior of stator.
4. Liquid : Clean, non-coorosive and non-explosive liquids, without any particle ,fiber or mineral oil. Water/glycol mixtures max. mixing ratio:1:1
5. Dry running no more than 10min.

型号解析 Model Explaination

RS □ / □ □ □ - □

- 180: body length (130/180/200mm)
  泵头长度
- F:flange,B:brass body,S:stainless steel body,P:plastic body
  F：法兰泵头,B：铜泵头，S：不锈钢泵头，P：塑料泵头
- G: Pump outlooking design (G/T/E/Z/B/Y ...)
  机筒外观
- Max.head(4m,6m,7m,8m...)
  最大扬程
- Inlet/outlet:15,25,32... (15:1", 25:1 1/2",32:2".....)
  水泵口径尺寸
- RS:small circulation pump
  GR:big flange pump
  RS:小型号循环泵
  GR:法兰大泵

- Example:RS25/6G-180 is small circulation pump with cast-iron body, 25inlet/outlet,6m head,180mm body length
  示例：RS25/6G-180， 循环泵， 25口径，6m扬程，铸铁泵头，180mm泵头长度

Our pump has several different designs for customer chose. Each design is only the different of outlooking, no affection on performance and quality. All spare parts and material are the same.The popular model types are:T G type,T type,E type, B type. Each design has its own housing and terminal box. pls check the photos as following.

我公司水泵有多种外观样式供客户选择。每种样式区别在于机筒跟线盒。此种样式区分只限于外观不涉及产品的性能以及质量。每款配件的材料完全一致。

目前市场常用样式为：G款、T款、E款、B款。如图所附。每款机筒对应的接线盒也各自不同。

RS15/4T
RS15/6T

RS15/4G
RS15/6G

RS25/4T-180
RS25/6T-180

RS25/4G-180
RS25/6G-180

RS25/4T-130
RS25/6T-130

RS25/4G-130
RS25/6G-130

RS15/4E
RS15/6E

RS32/4T-180
RS32/6T-180

RS25/4E-180
RS25/6E-180

RS32/4G-180
RS32/6G-180

RS25/4E-130
RS25/6E-130

RS32/4E-180
RS32/6E-180

RS15/4T RS15/4G RS15/4E

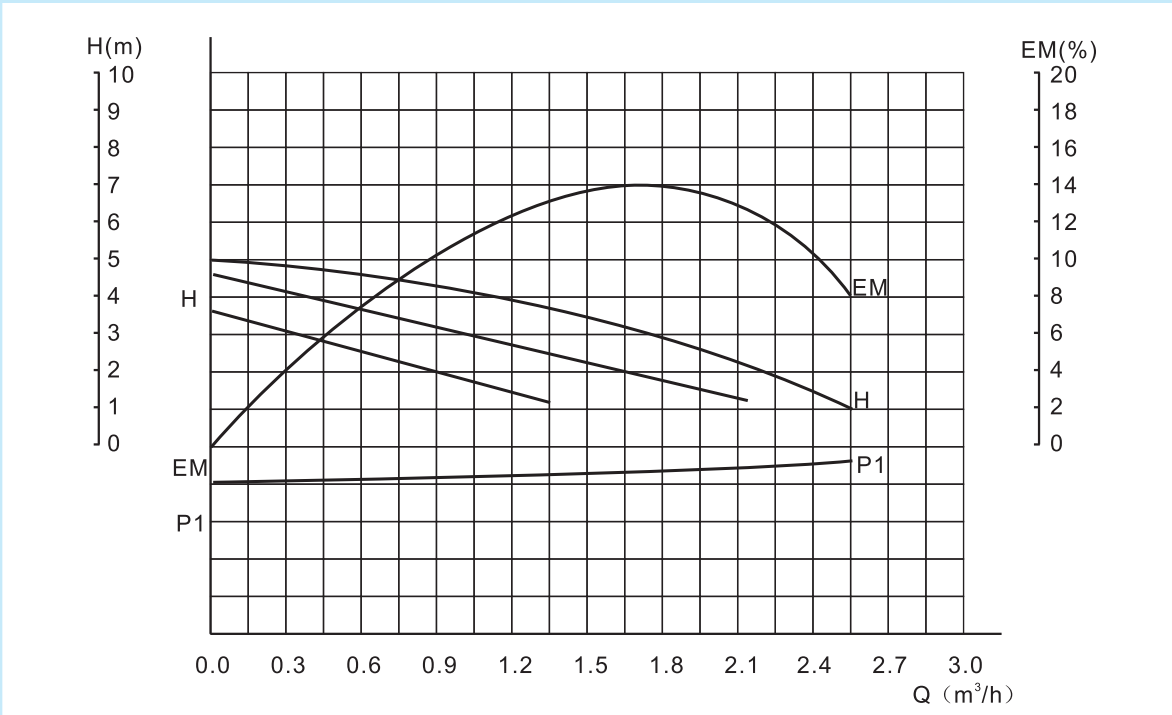

RS25/4T RS25/4G RS25/4E

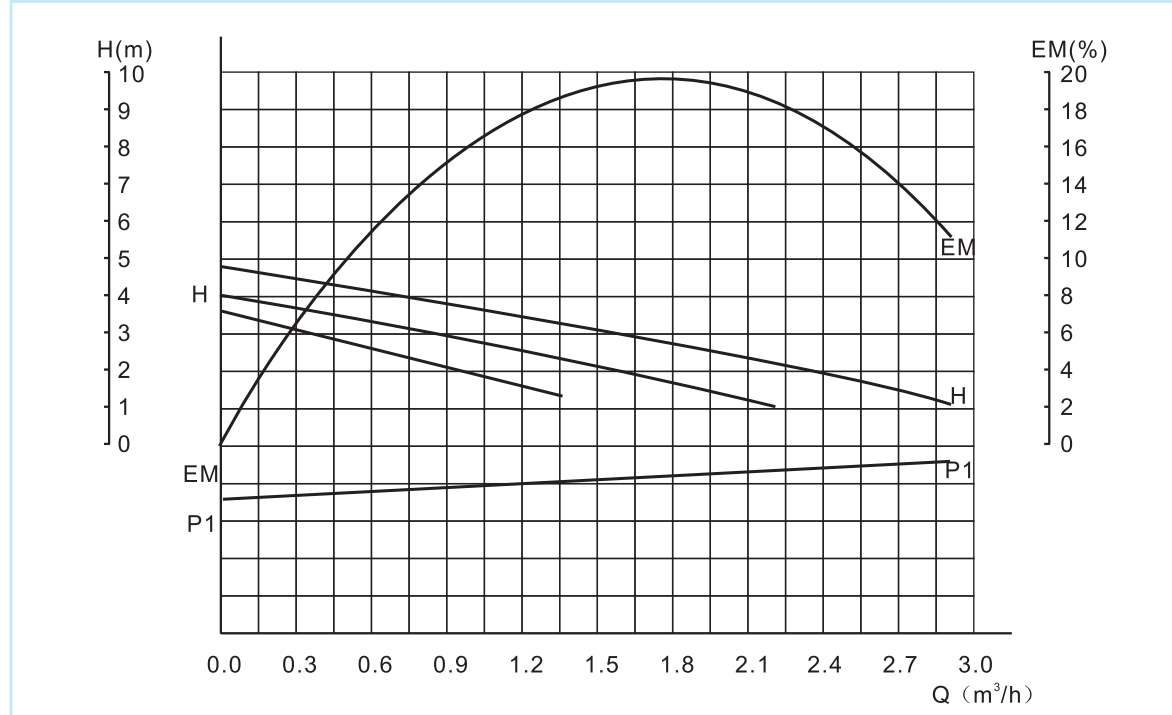

RS32/4T RS32/4G RS32/4E

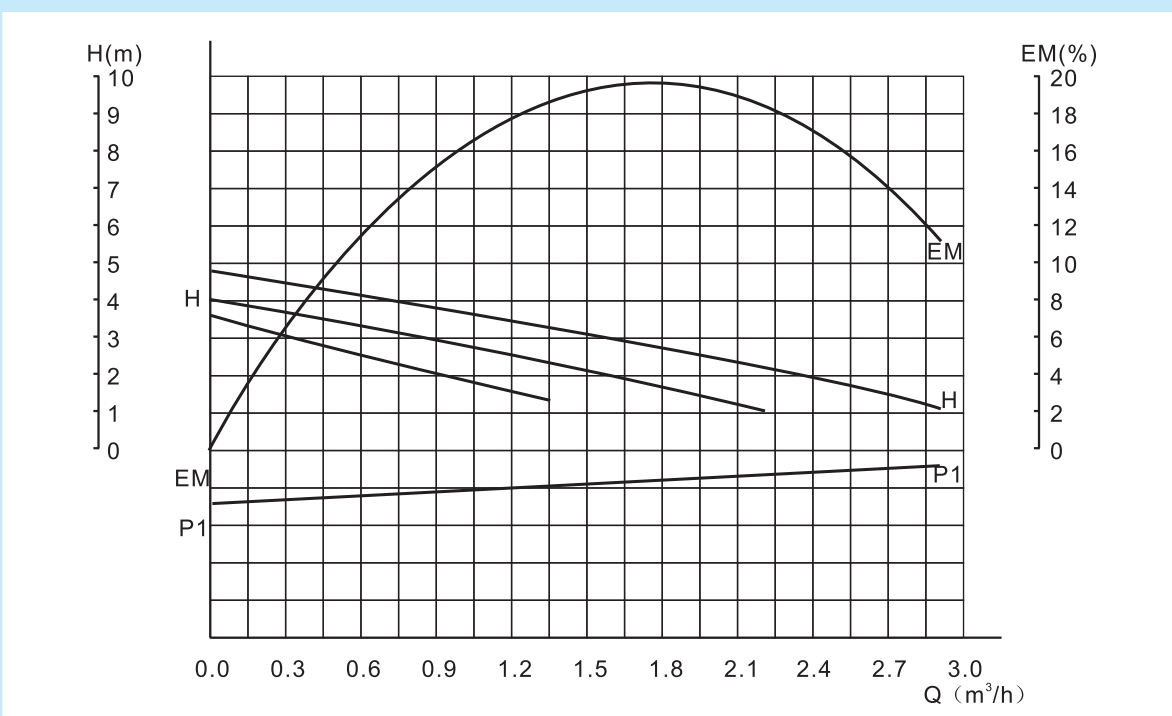

RS12/6T RS12/6G RS12/6E

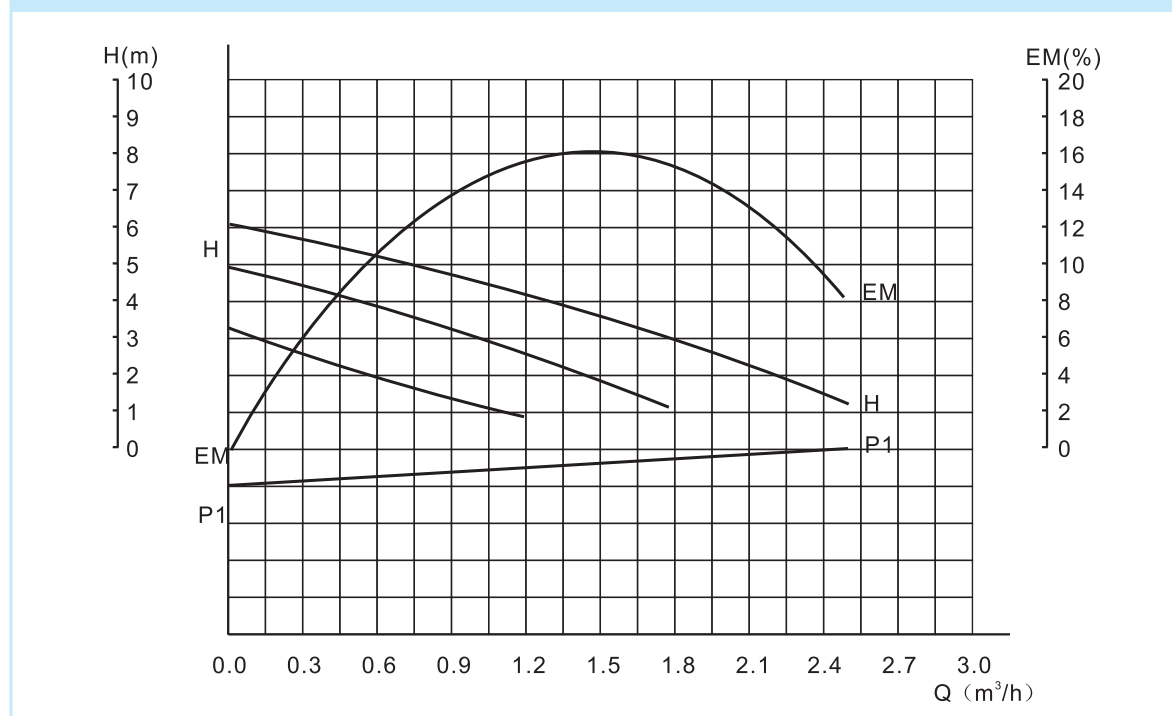

RS15/6T RS15/6G RS15/6E

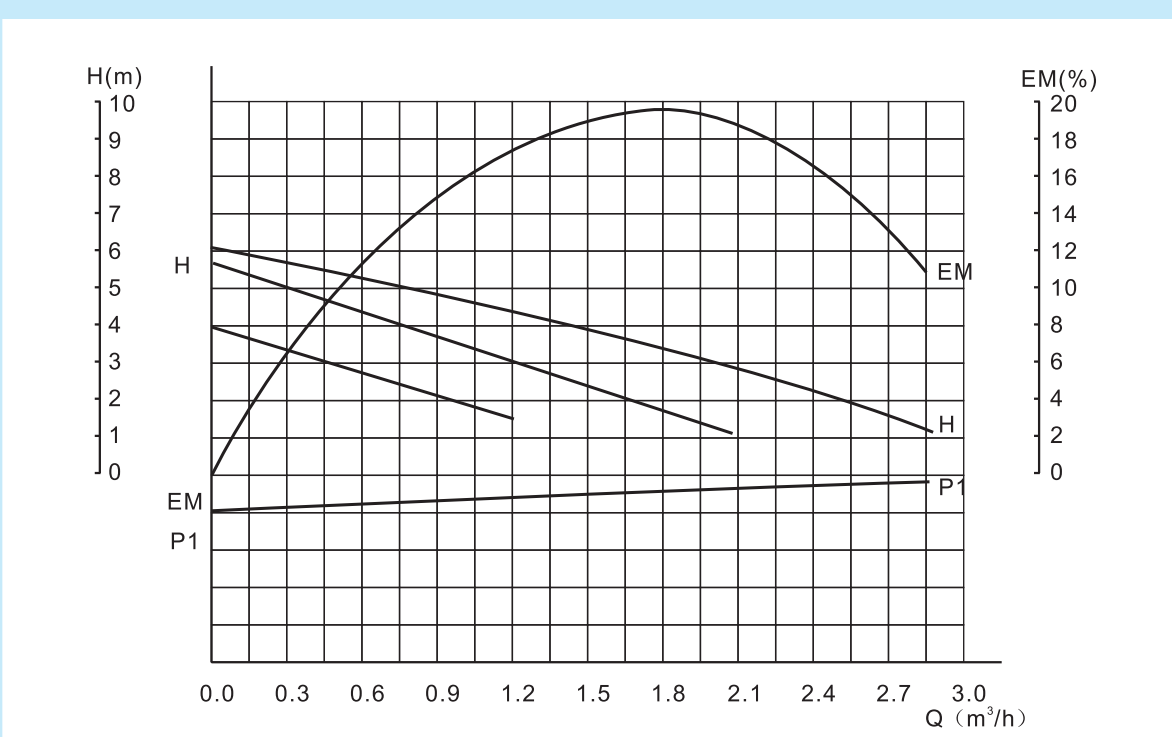

RS20/6T RS20/6G RS20/6E

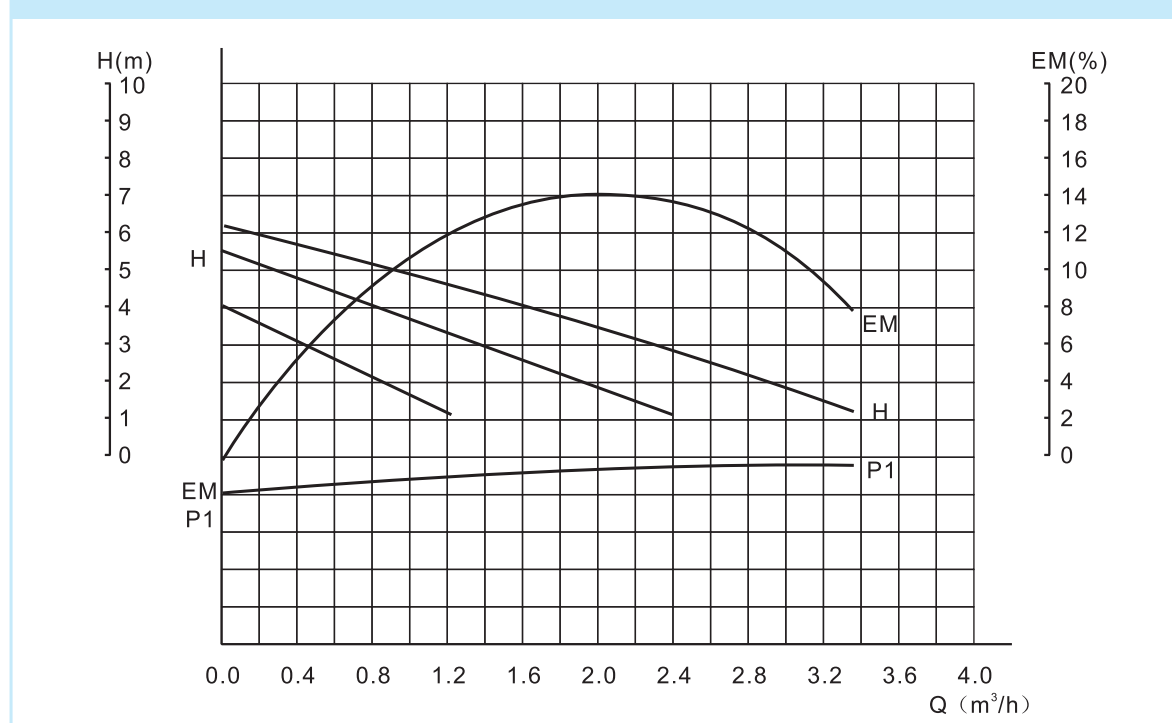

RS25/6T RS25/6G RS25/6E

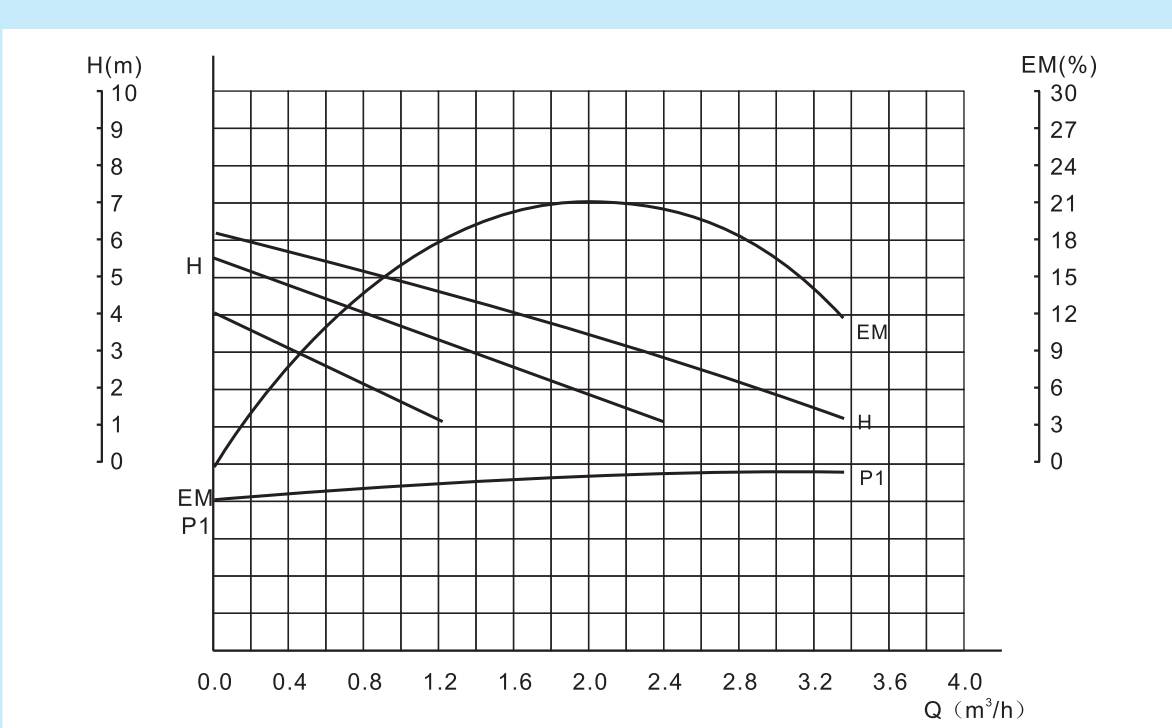

RS32/6T RS32/6G RS32/6E

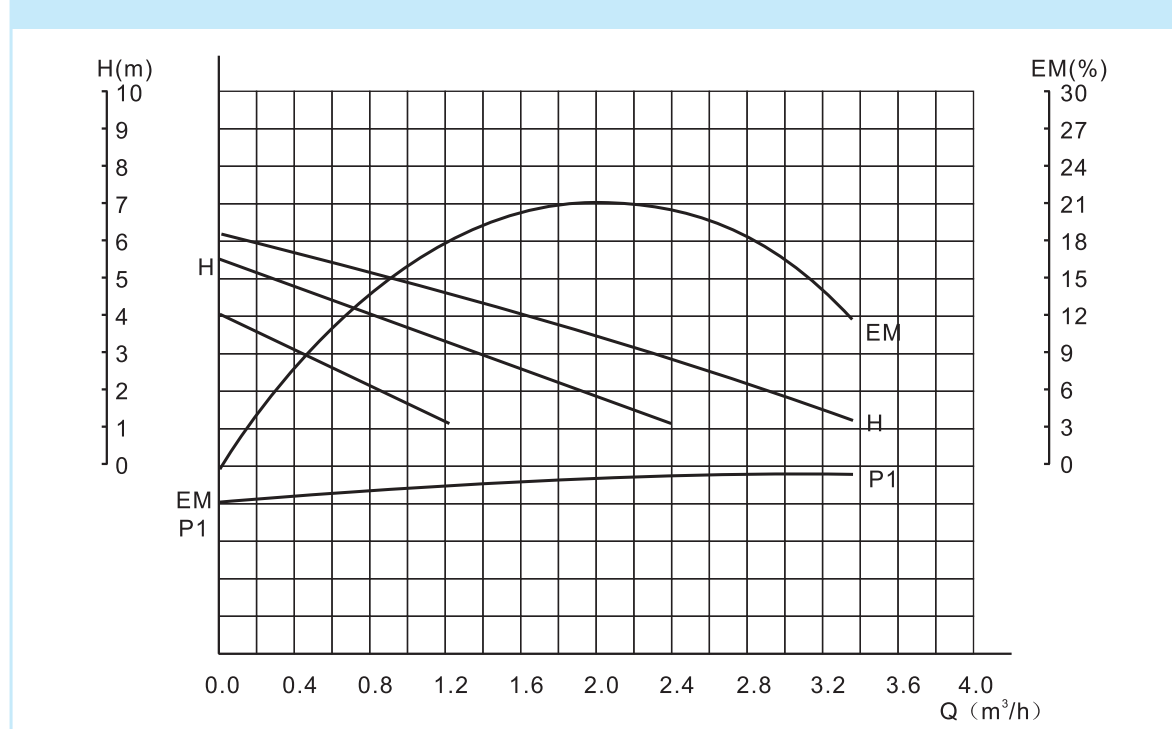

技术参数 Technical parameter

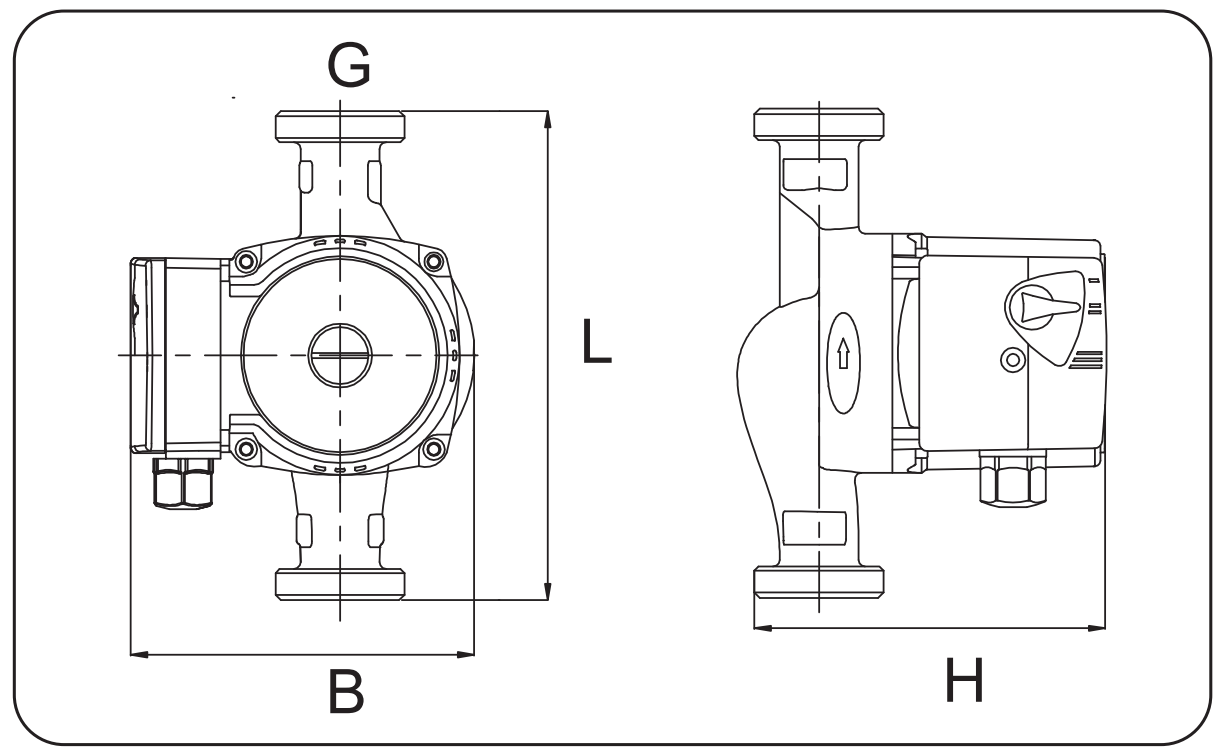

Model	Power	Max.Flow	Max.Head	Voltage			Material of pump body			Dimension(mm)				Weight (Kg)
	(W)	(m³/h)	(m)	220V/50Hz	220V/60Hz	127V/60Hz	Cast Iron	Brass	Stainless steel	L	B	H	G	
RS15/4T	72/53/38	2.3/1.7/0.8	4.5/4/3	●	●	●	●	●	●	130	127	133	1"	2.1
RS15/4G							●	●	●	130	127	133	1"	2.2
RS15/4E							●	●	●	130	127	133	1"	2.2
RS20/4T		2.3/1.7/0.8					●			130	127	133	1 1/4"	2.2
RS20/4G							●			130	127	133	1 1/4"	2.2
RS20/4E							●			130	127	133	1 1/4"	2.2
RS25/4T-130		2.9/2.1/1.3					●	●		130	127	133	1 1/2"	2.3
RS25/4G-130							●	●		130	127	133	1 1/2"	2.3
RS25/4E-130							●	●		130	127	133	1 1/2"	2.3
RS25/4T-180		3.4/2.3/1.3					●	●		180	127	133	1 1/2"	2.4
RS25/4G-180							●	●		180	127	133	1 1/2"	2.4
RS25/4E-180							●	●		180	127	133	1 1/2"	2.4
RS32/4T-180		3.4/2.3/1.3					●	●		180	127	133	2"	2.6
RS32/4G-180							●	●		180	127	133	2"	2.6
RS32/4E-180							●	●		180	127	133	2"	2.6

Model	Power	Max.Flow	Max.Head	Voltage			Material of pump body			Dimension(mm)				Weight (Kg)
	(W)	(m³/h)	(m)	220V/50Hz	220V/60Hz	127V/60Hz	Cast Iron	Brass	Stainless steel	L	B	H	G	
RS12/6T	93/67/46	1.8/1.2/0.8	6/5/3	●	●	●	●	●	●	130	127	133	3/4"	2.1
RS12/6G							●	●	●	130	127	133	3/4"	2.1
RS12/6E							●	●	●	130	127	133	3/4"	2.1
RS15/6T		2.6/2.0/1.2					●	●	●	130	127	133	1"	2.3
RS15/6G							●	●	●	130	127	133	1"	2.3
RS15/6E							●	●	●	130	127	133	1 "	2.4
RS20/6T		3.3/2.3/1.3					●			130	127	133	1 1/4"	2.4
RS20/6G							●			130	127	133	1 1/4"	2.4
RS20/6E							●			130	127	133	1 1/4"	2.4
RS25/6T-130		3.3/2.3/1.3					●	●		130	127	133	1 1/2"	2.4
RS25/6G-130							●	●		130	127	133	1 1/2"	2.4
RS25/6E-130							●	●		130	127	133	1 1/2"	2.4
RS25/6T-180		3.9/2.9/1.6					●	●		180	127	133	1 1/2"	2.5
RS25/6G-180							●	●		180	127	133	1 1/2"	2.5
RS25/6E-180							●	●		180	127	133	1 1/2"	2.5
RS32/6T-180		3.9/2.9/1.6					●	●		180	127	133	2"	2.7
RS32/6G-180							●	●		180	127	133	2"	2.7
RS32/6E-180							●	●		180	127	133	2"	2.7

RS15/7T-130

RS15/7G-130

RS25/7T-130

RS25/7G-130

RS25/7T-180

RS25/7G-180

RS32/7T-180

RS32/7G-180

RS15/7T RS15/7G

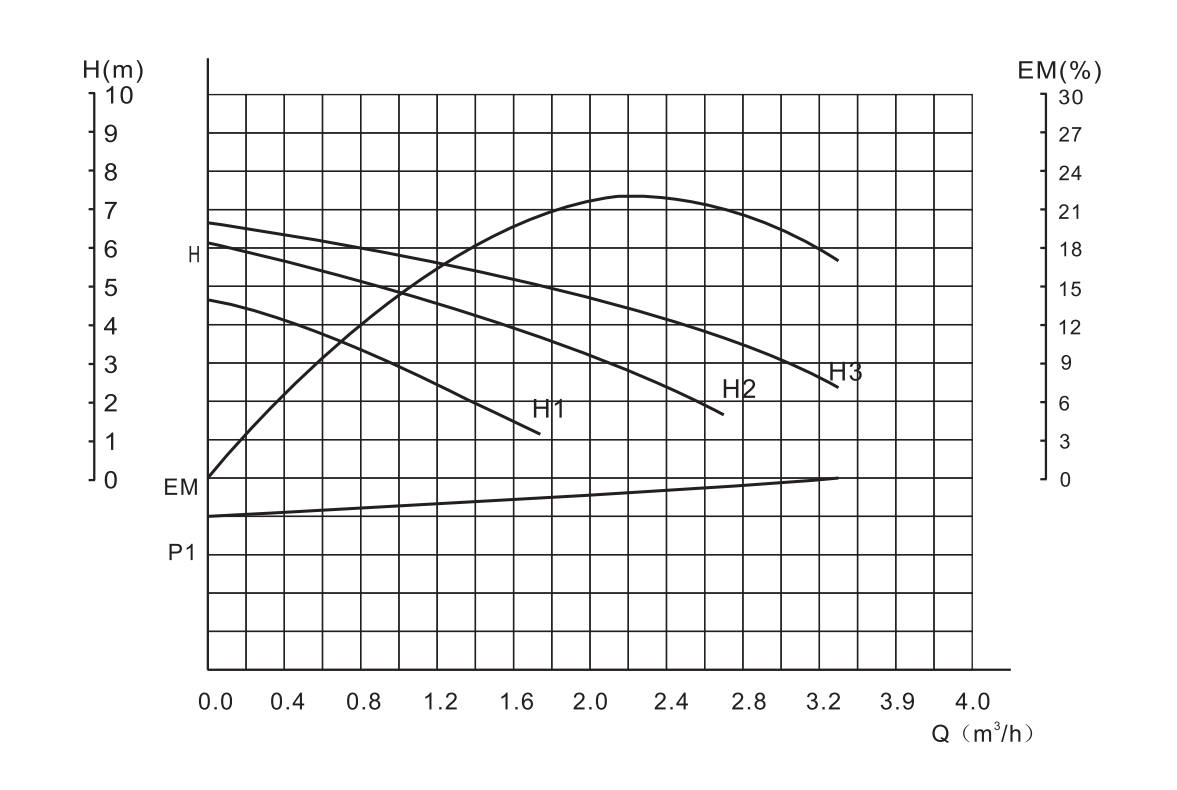

RS25/7T RS25/7G

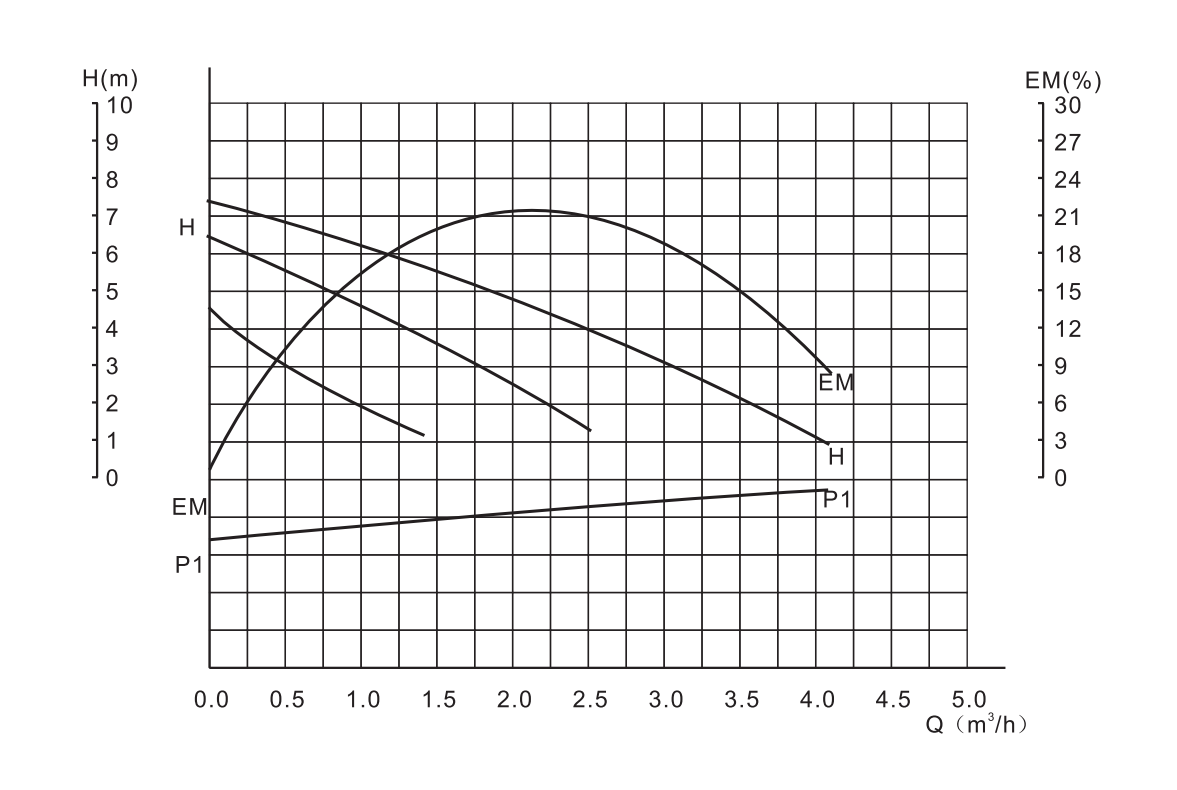

RS32/7T RS32/7G

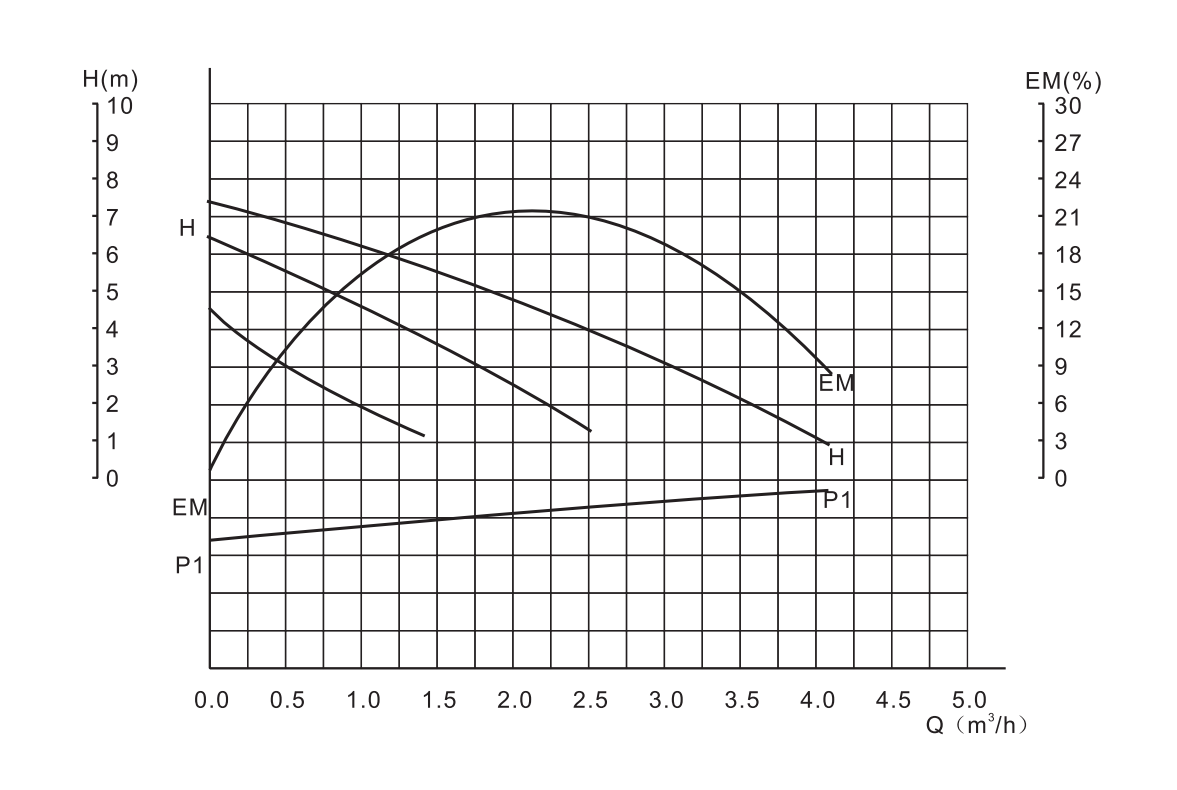

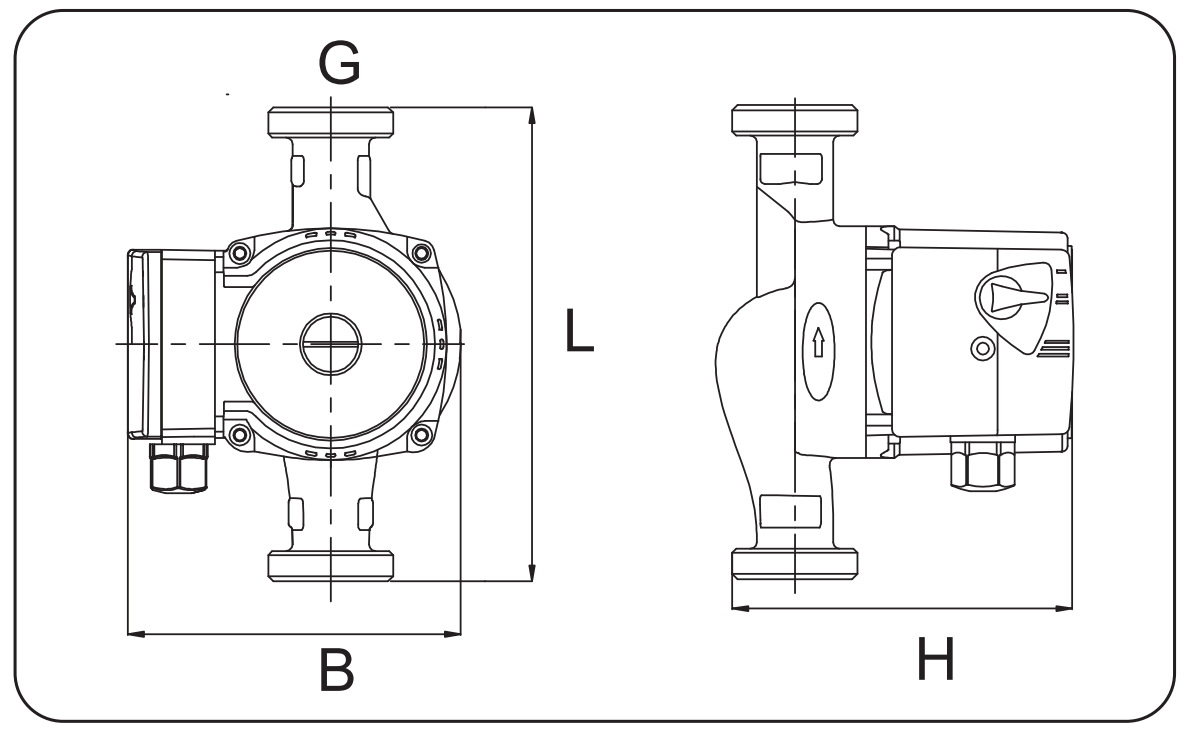

技术参数 Technical parameter

Model	Power (W)	Max.Flow (m³/h)	Max.Head (m)	Voltage 220V/50Hz	Voltage 220V/60Hz	Voltage 127V/60Hz	Material of pump body Cast Iron	Brass	Stainless steel	Dimension(mm) L	B	H	G	Weight (Kg)
RS15/7T-130	135/93/67	3.3/2.7/1.3	7/6.5/4.5	●	●	●	●	●	●	130	123	145	1"	2.6
RS15/7G-130							●	●	●	130	123	145	1"	2.6
RS25/7T-130		3.8/3.0/1.9					●	●		130	123	145	1 1/2"	2.8
RS25/7G-130							●	●		130	123	145	1 1/2"	2.8
RS25/7T-180		4.1/3.2/2.1					●	●		180	123	145	2"	3.0
RS25/7G-180							●	●		180	123	145	2"	3.0
RS32/7T-180		4.2/3.4/2.2					●	●		180	123	145	2"	3.2
RS32/7G-180							●	●		180	123	145	2"	3.2

RS15/8T

RS15/8

RS25/8T

RS25/8

RS32/8T

RS32/8

RS15/8T RS15/8 RS15/8E

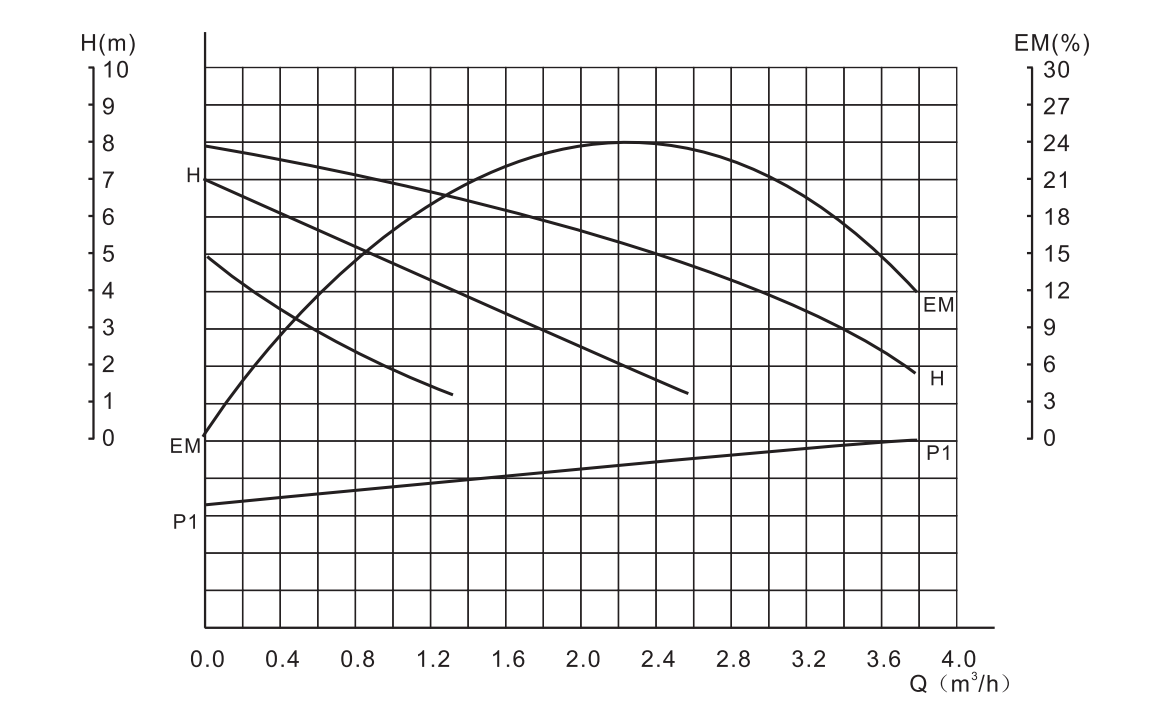

RS25/8T RS25/8 RS25/8E

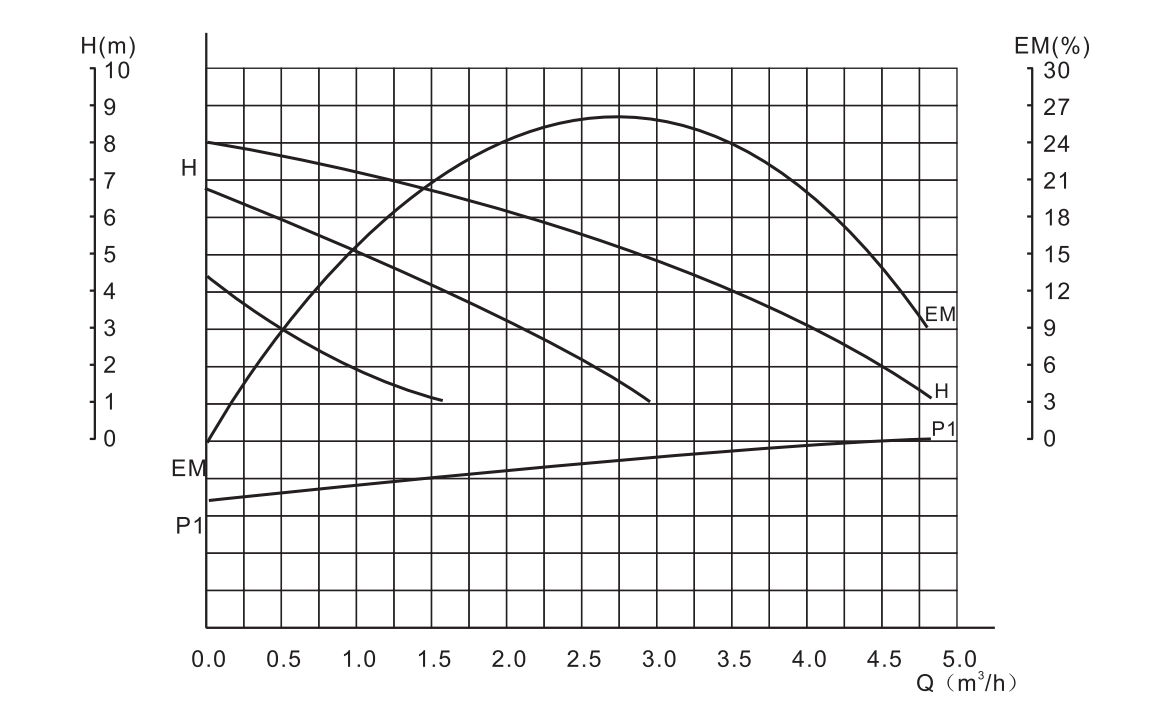

RS32/8T RS32/8 RS32/8E

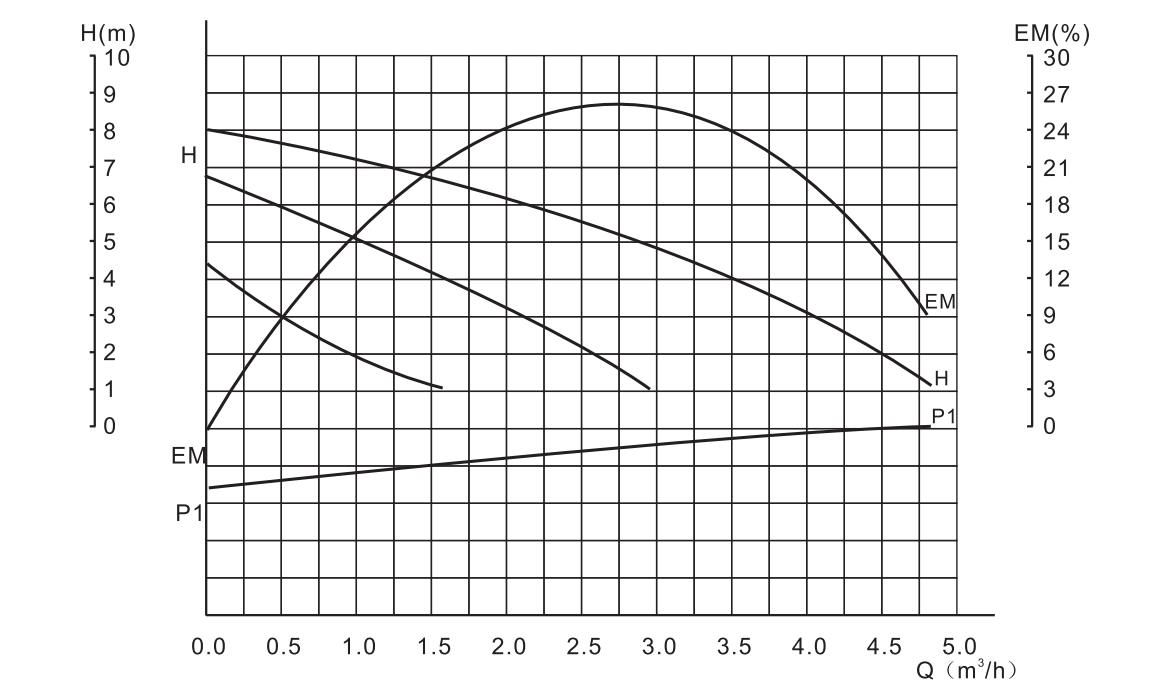

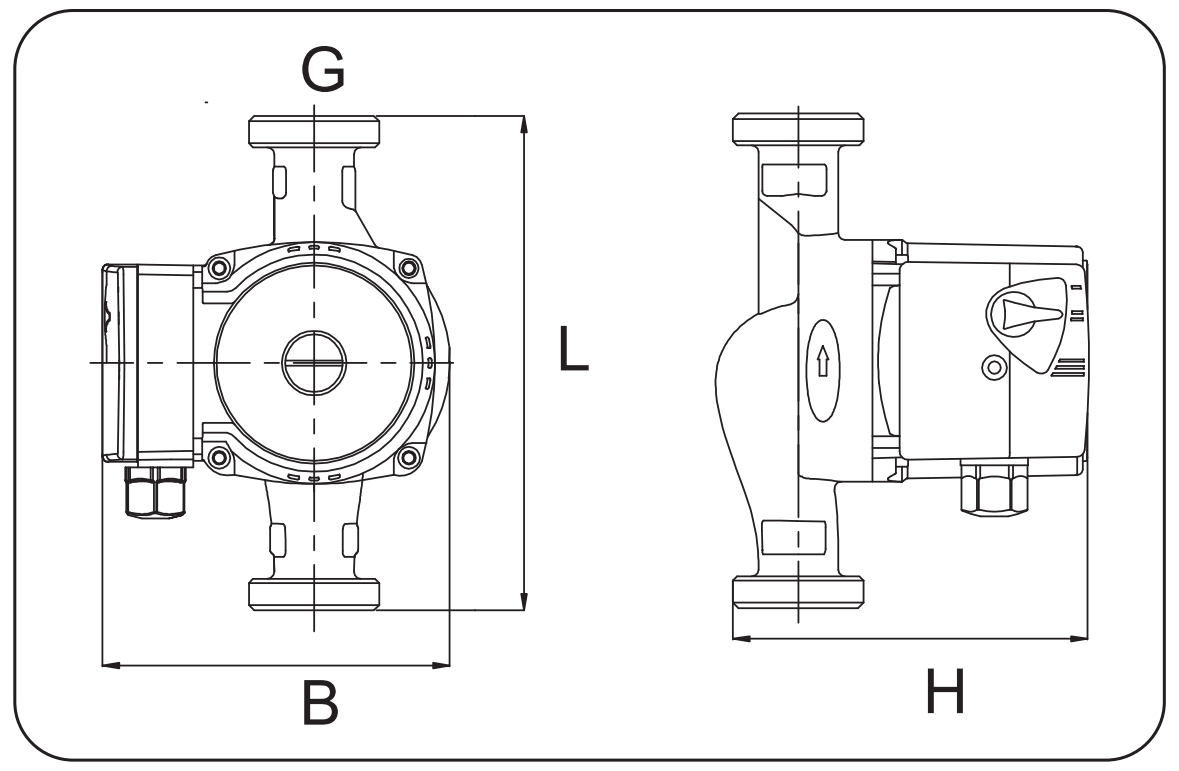

技术参数 Technical parameter

Model	Power (W)	Max.Flow (m^3/h)	Max.Head (m)	Voltage 220V/50Hz	Voltage 220V/60Hz	Voltage 127V/60Hz	Material of pump body Cast Iron	Brass	Stainless steel	Dimension(mm) L	B	H	G	Weight (Kg)
RS15/8							●			180	127	159	1"	3.3
RS15/8T		3.4/2.4/1.2					●			180	127	159	1"	3.3
RS15/8E							●			180	127	159	1"	3.3
RS25/8							●	●		180	127	159	1 1/2"	3.4
RS25/8T	165/115/75	5.4/3.6/2.0	8/7/5	●	●	●	●	●		180	127	159	1 1/2"	3.4
RS25/8E							●	●		180	127	159	1 1/2"	3.4
RS32/8							●			180	127	159	2"	3.6
RS32/8T		5.4/3.6/2.0					●			180	127	159	2"	3.6
RS32/8E							●			180	127	159	2"	3.6


RS25/8GT


RS25/8G


RS25/8GE


RS32/8GT


RS32/8G


RS32/8GE

GREENPRO®
CIRCULATING PUMP

RS25/8G RS25/8GT RS25/8GE

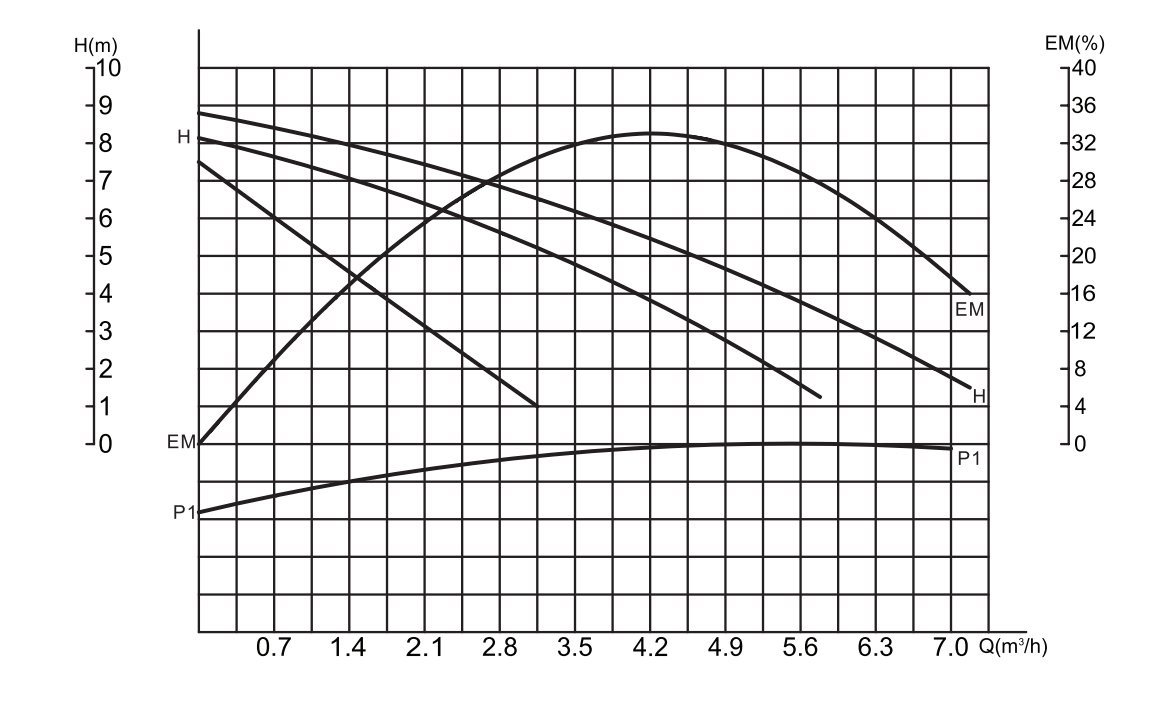

RS32/8G RS32/8GT RS32/8GE

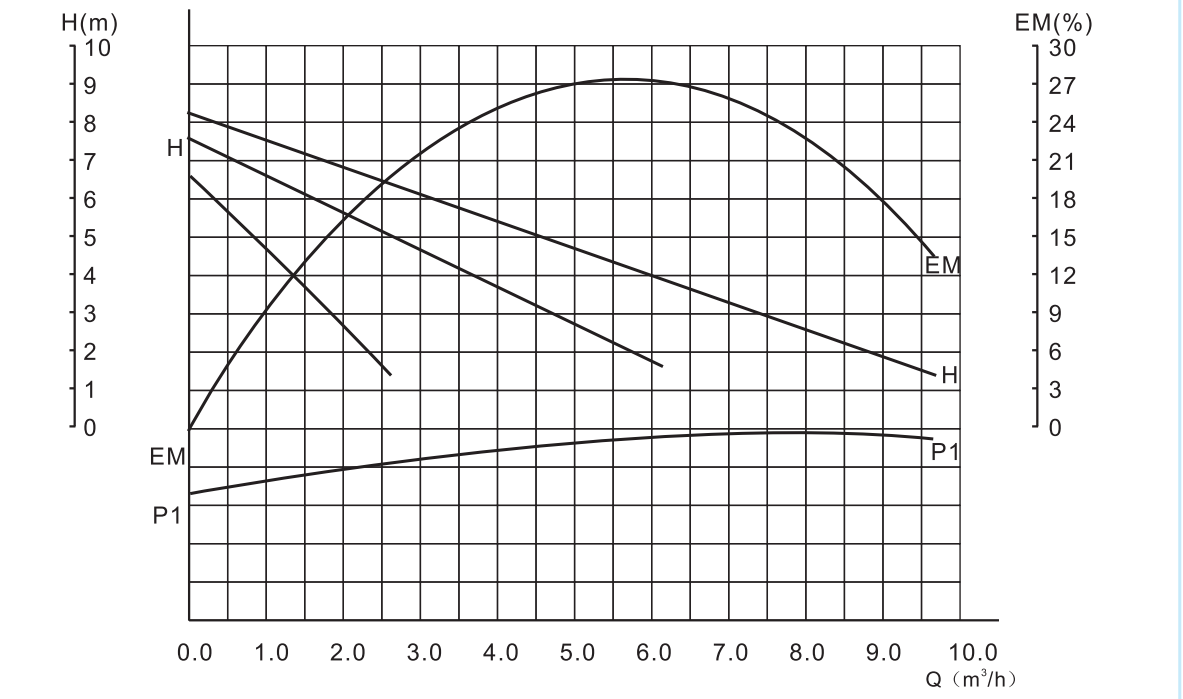

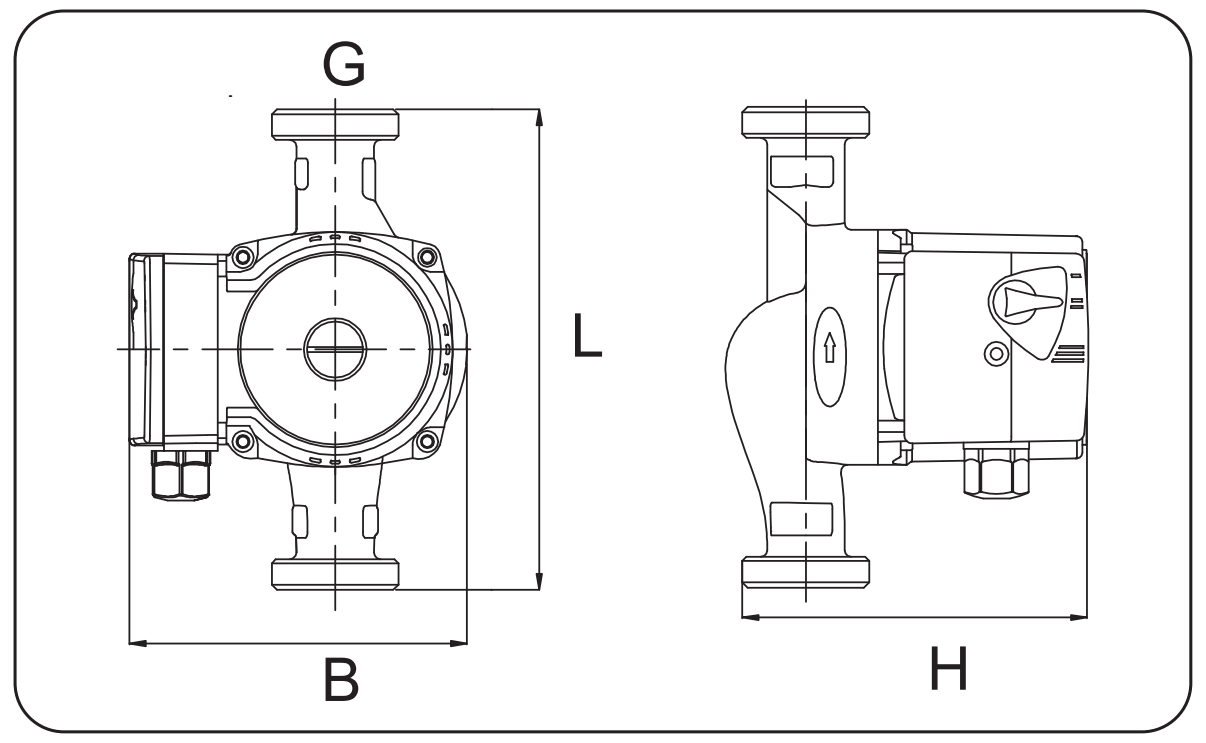

技术参数 Technical parameter

Model	Power	Max.Flow	Max.Head	Voltage			Material of pump body			Dimension(mm)				Weight (Kg)
	(W)	(m^3/h)	(m)	220V/ 50Hz	220V/ 60Hz	127V/ 60Hz	Cast Iron	Brass	Stainless steel	L	B	H	G	
RS25/8G							●	●		180	134.5	158	1 1/2"	4.2
RS25/8GT	182/170/145	6.9/5.7/2.7					●	●		180	134.5	158	1 1/2"	4.2
RS25/8GE			8/7.5/6.5	●	●	●	●	●		180	134.5	158	1 1/2"	4.2
RS32/8G							●	●		180	137	172	2"	4.8
RS32/8GT	270/210/150	9.6/6.2/2.5					●	●		180	137	172	2"	4.8
RS32/8GE							●	●		180	137	172	2"	4.8

RS20/11T

RS20/11

RS20/11E

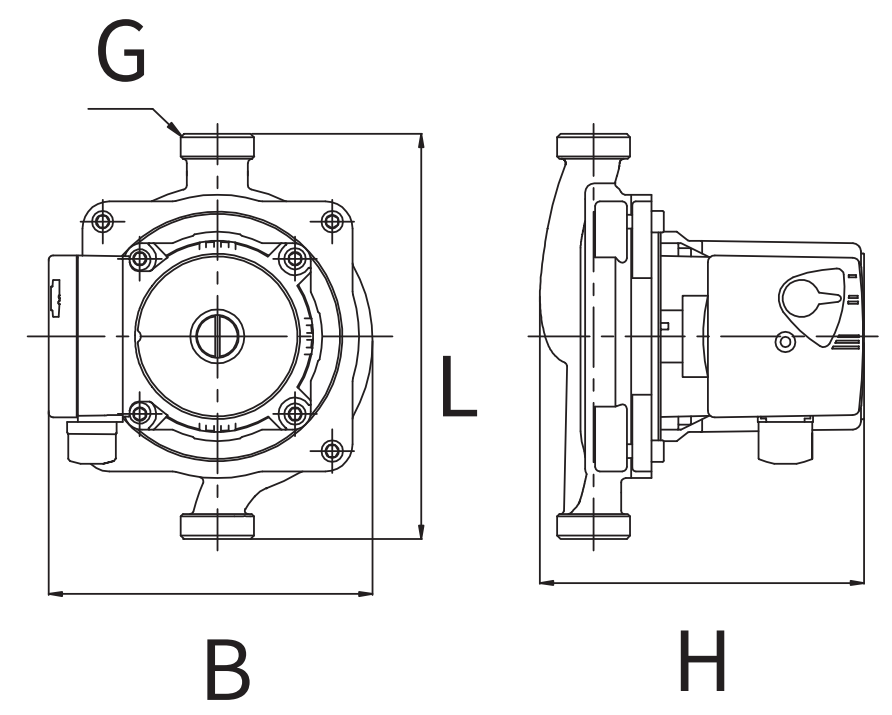

RS20/11T RS20/11 RS20/11E

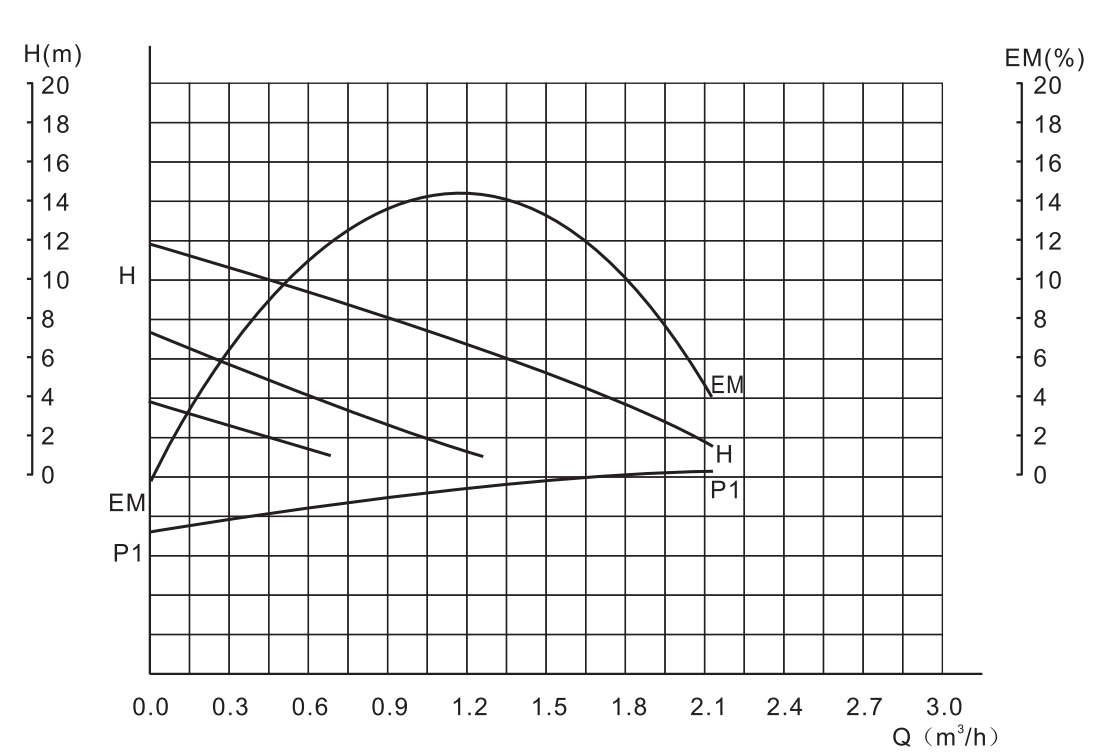

技术参数 Technical parameter

Model	Power	Max.Flow	Max.Head	Voltage			Material of pump body			Dimension(mm)				Weight
	(W)	(m^3/h)	(m)	220V/ 50Hz	220V/ 60Hz	127V/ 60Hz	Cast Iron	Brass	Stainless steel	L	B	H	G	(Kg)
RS20/11T	165/115/75	2.1/1.2/0.6	11/7/3.4	●	●	●	●	●		180	144	144	1"	4.0
RS20/11							●	●		180	144	144	1"	4.0
RS20/11E							●	●		180	144	144	1"	4.0

RS20/12T

RS20/12G

RS20/12E

RS25/12T

RS25/12G

RS25/12E

RS20/12G RS20/12T RS20/12E

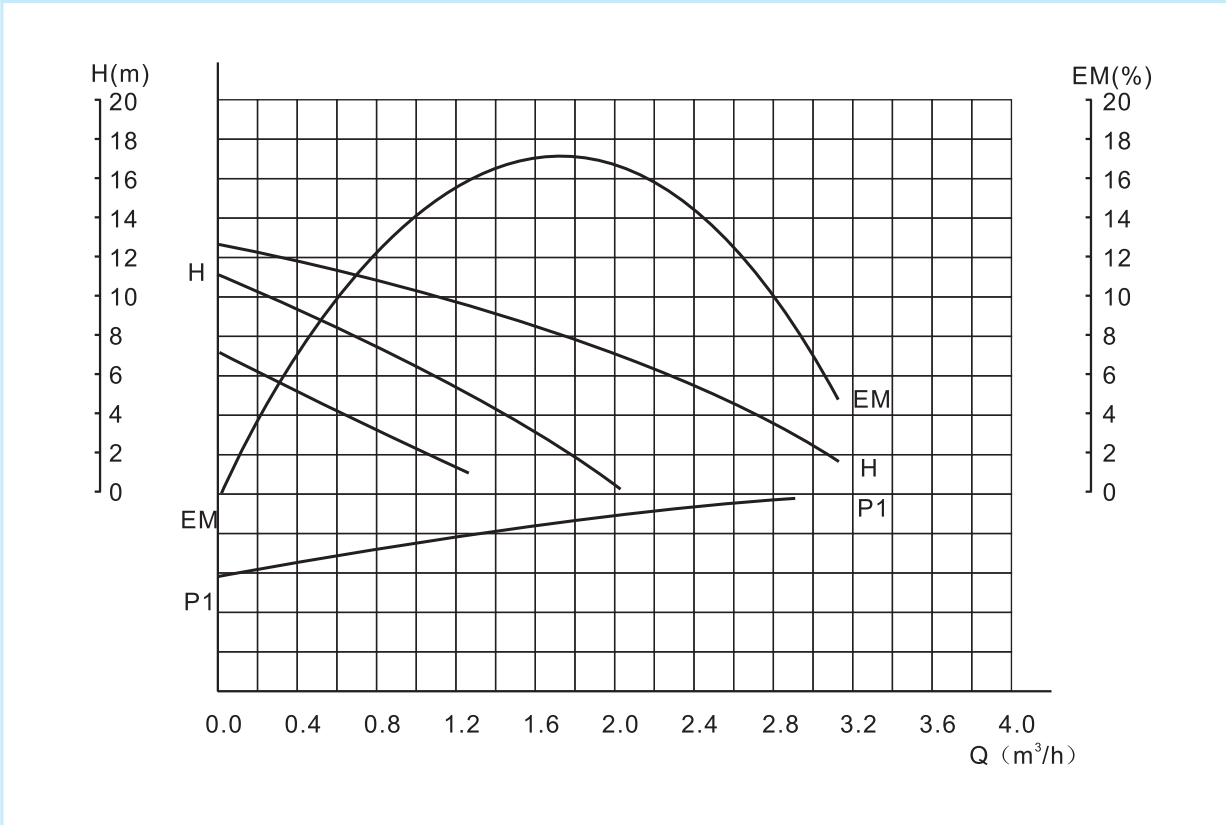

RS25/12G RS20/12T RS20/12E

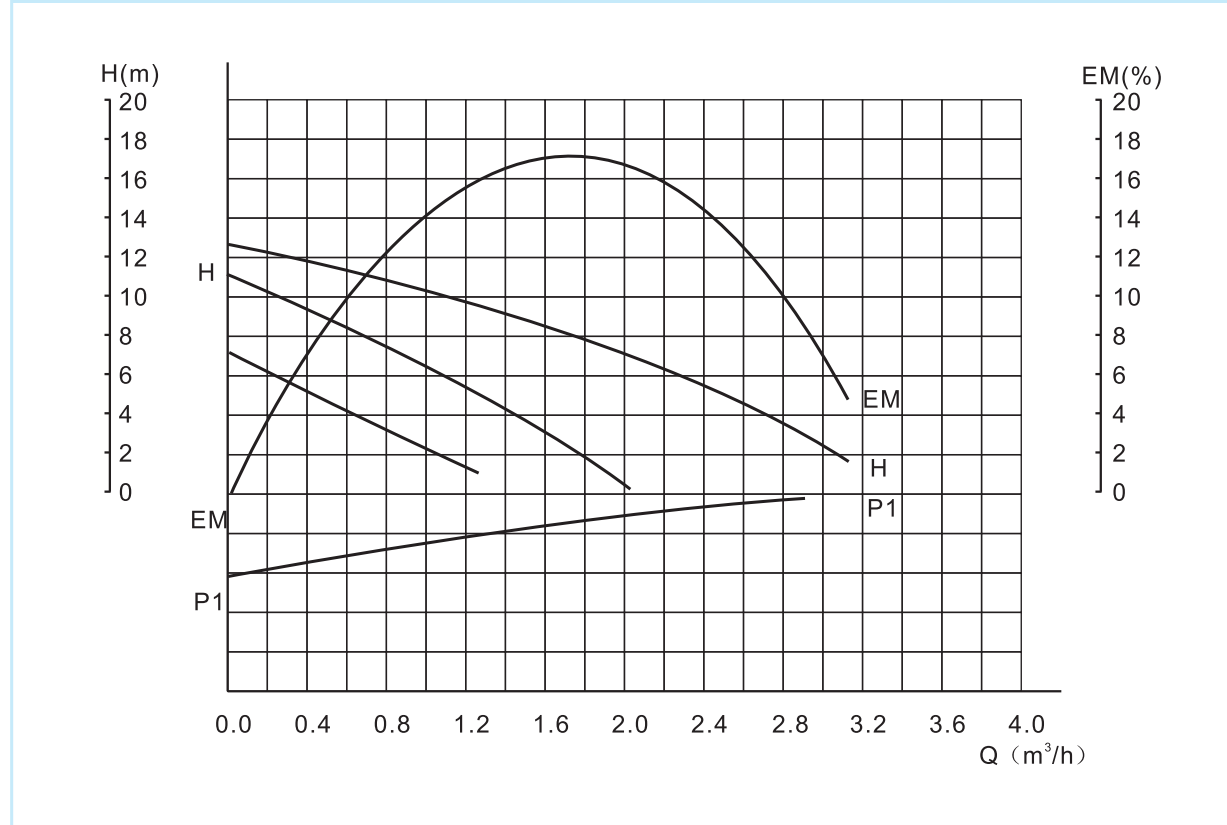

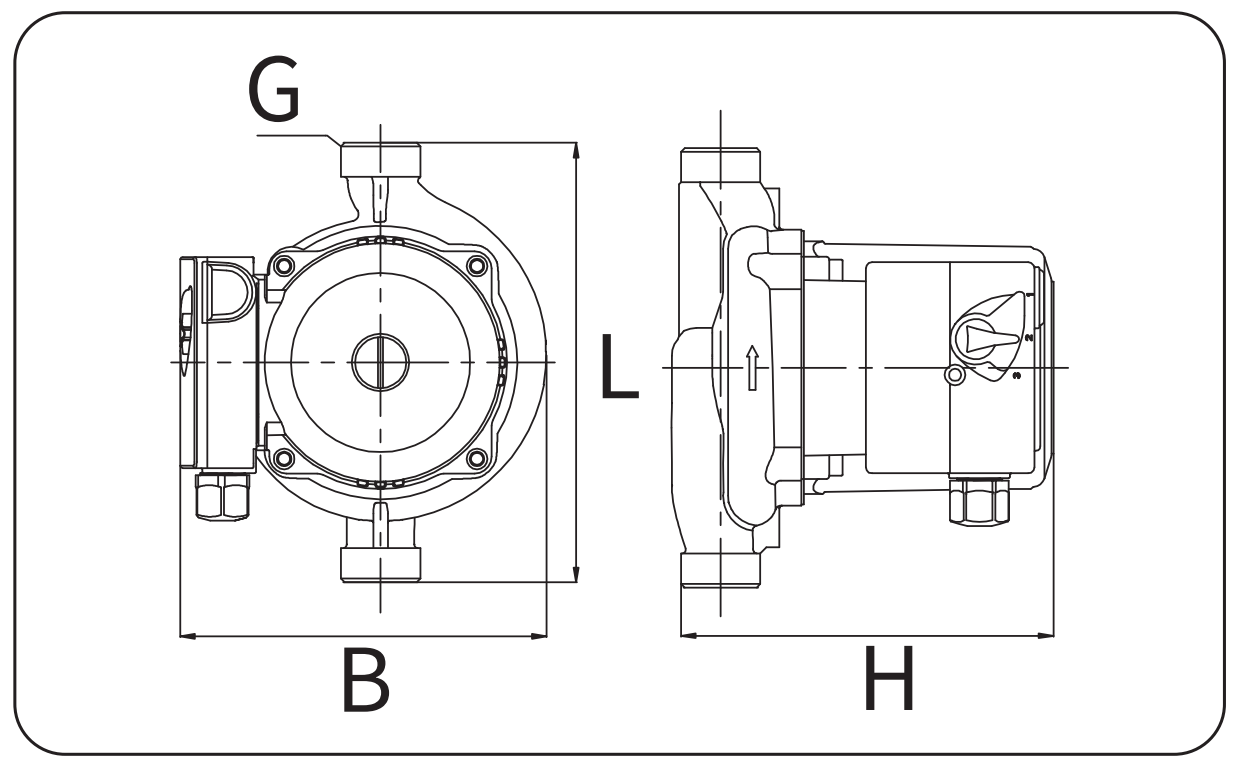

技术参数 Technical parameter

Model	Power (W)	Max.Flow (m^3/h)	Max.Head (m)	Voltage 220V/50Hz	Voltage 220V/60Hz	Voltage 127V/60Hz	Material of pump body: Cast Iron	Brass	Stainless steel	Dimension(mm) L	B	H	G	Weight (Kg)
RS20/12G	245/220/145	3.1/1.9/1.3	12/11/7	●	●	●	●	●		180	150	152	1"	4.4
RS20/12T							●	●		180	150	152	1"	4.4
RS20/12E							●	●		180	150	152	1"	4.4
RS25/12G		3.7/2.2/1.3					●			180	150	160	1 1/2"	4.5
RS25/12T							●			180	150	160	1 1/2"	4.5
RS25/12E							●			180	150	160	1 1/2"	4.5

GREENPRO®
CIRCULATING PUMP


RS25/15T


RS25/15G


RS25/15E

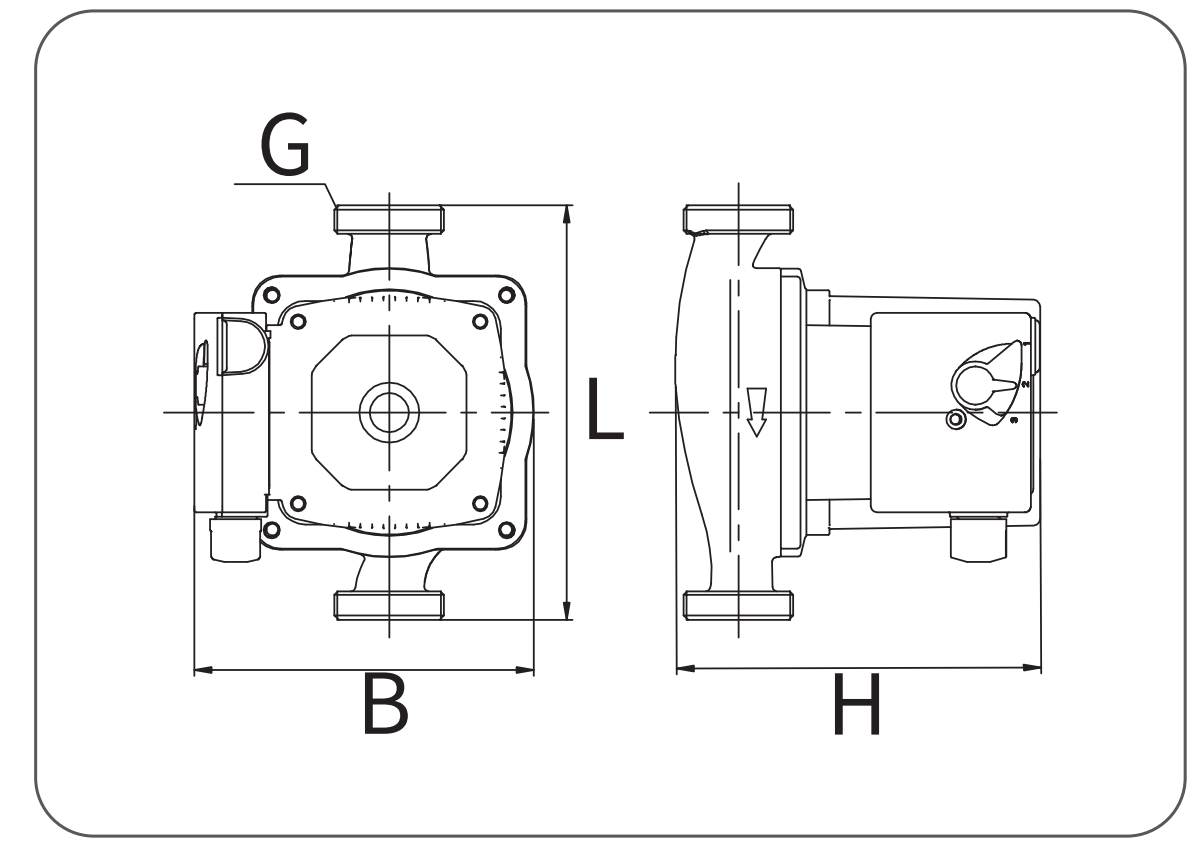

RS25/15G RS25/15T RS25/15E

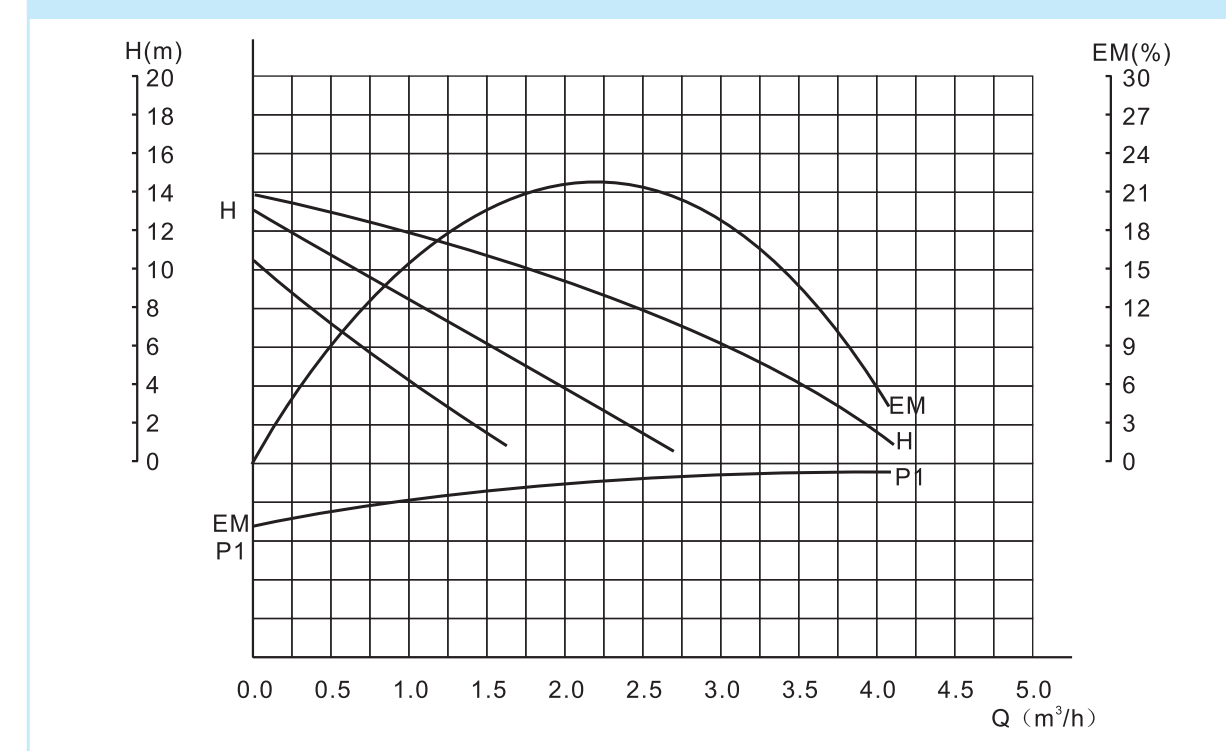

技术参数 Technical parameter

Model	Power (W)	Max.Flow (m^3/h)	Max.Head (m)	Voltage 220V/50Hz	Voltage 220V/60Hz	Voltage 127V/60Hz	Material of pump body: Cast Iron	Brass	Stainless steel	Dimension(mm) L	B	H	G	Weight (Kg)
RS25/15G	270/210/150	4.1/2.8/1.7	14/13/10	●	●	●	●	●		180	149	160	1 1/2"	5.3
RS25/15T							●	●		180	149	160	1 1/2"	5.3
RS25/15E							●	●		180	149	160	1 1/2"	5.3

RS25/6B
RS32/6B

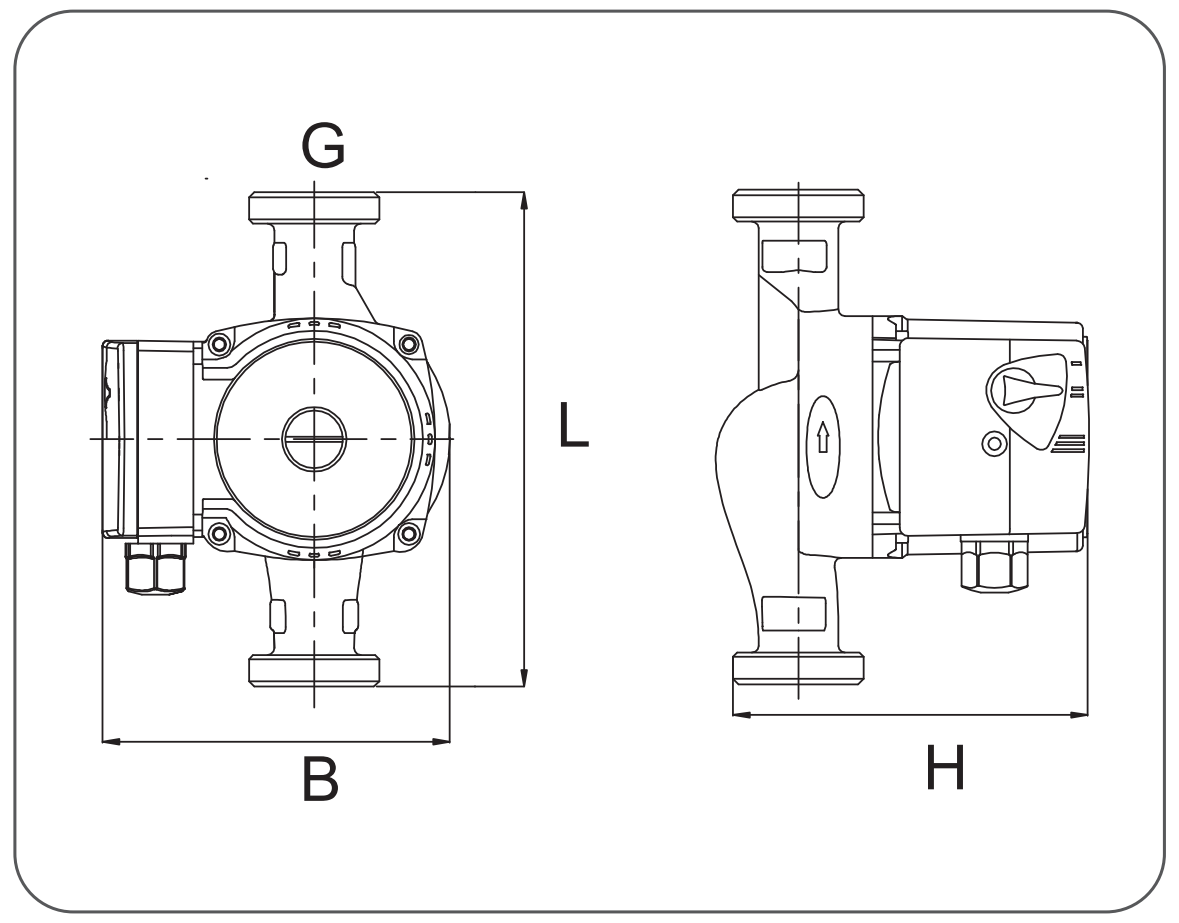

RS25/4B

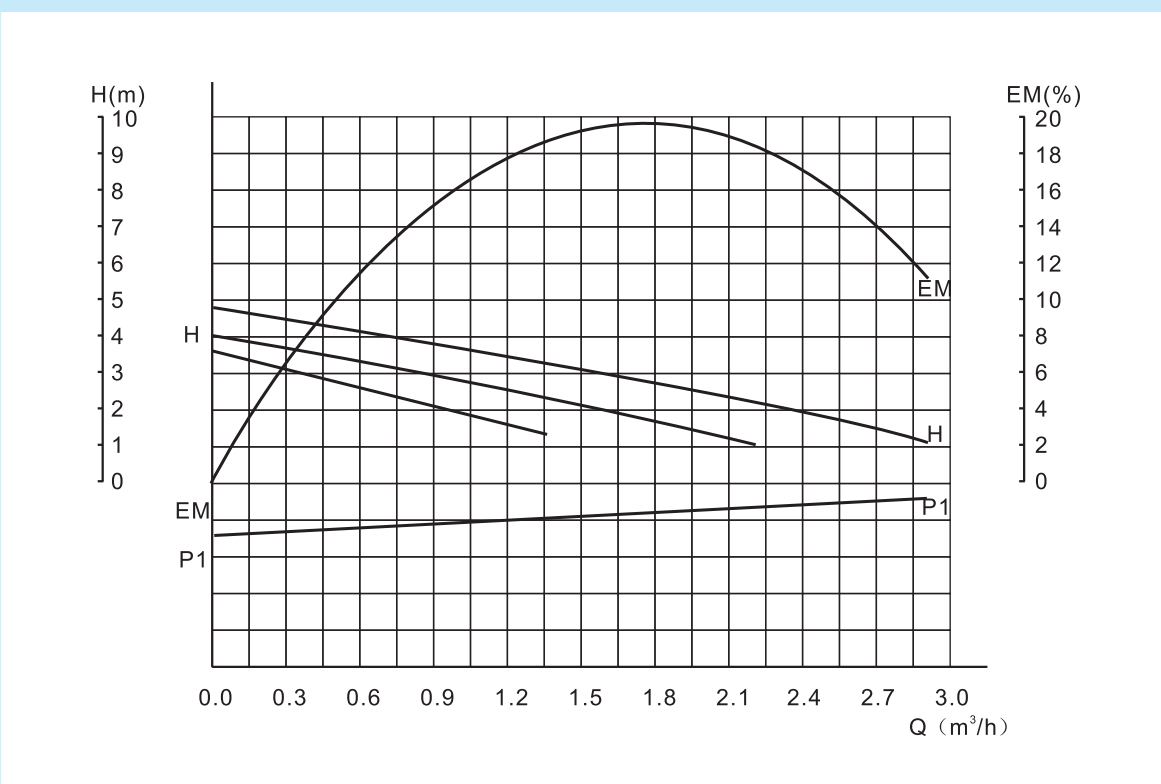

RS25/6B

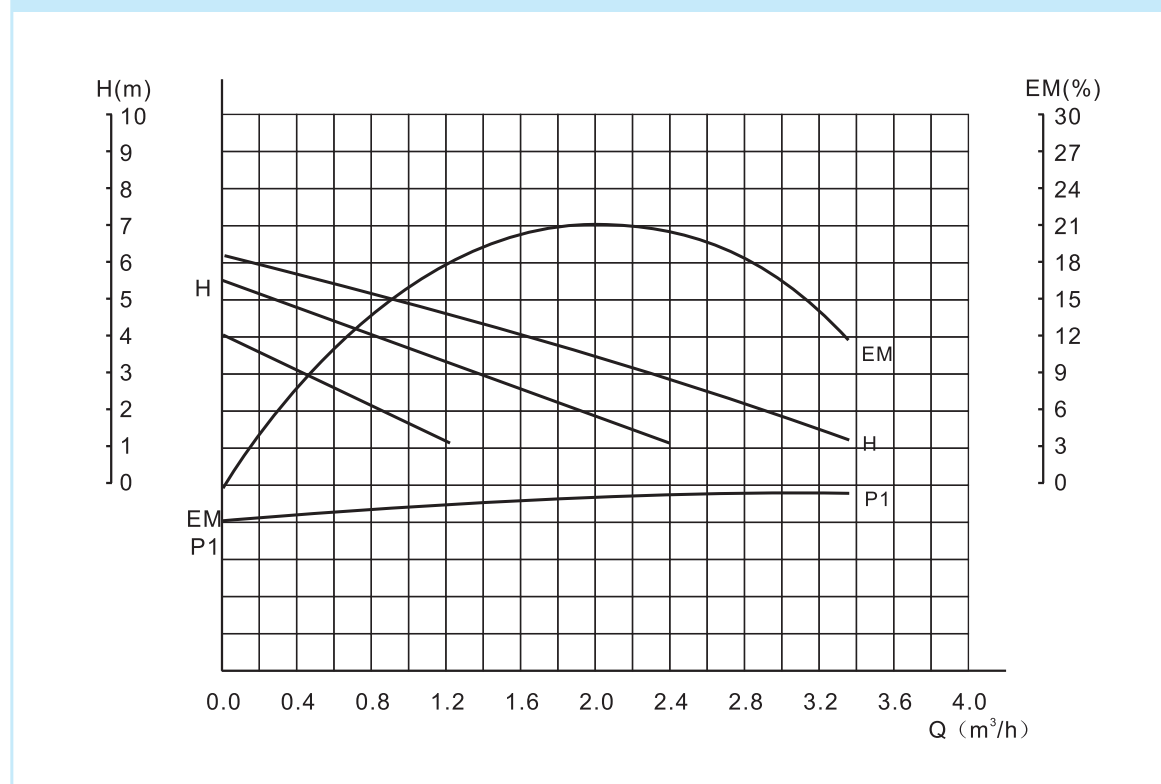

技术参数 Technical parameter

Model	Power (W)	Max.Flow (m³/h)	Max.Head (m)	Voltage 220V/50HZ	Voltage 220V/60HZ	Voltage 127V/60HZ	Mater of pump body: Cast Iron	Brass	Stainless steel	Dimension(mm) L	B	H	G	Weight (Kg)
RS15/4B	72/53/38	2.3/1.7/0.8	4.5/4/3	●	●	●	●	●	●	130	124	137	1"	2.1
RS15/4Y							●	●	●	130	124	137	1"	2.2
RS20/4B		2.3/1.7/0.8					●	●		130	124	137	1 1/4"	2.2
RS20/4Y							●	●		130	124	137	1 1/4"	2.2
RS25/4B-130		2.9/2.1/1.3					●	●		130	124	137	1 1/2"	2.3
RS25/4Y-130							●	●		130	124	137	1 1/2"	2.3
RS25/4B-180		3.4/2.3/1.3					●	●		180	124	137	1 1/2"	2.4
RS25/4Y-180							●	●		180	124	137	1 1/2"	2.4
RS32/4B-180		3.4/2.3/1.3					●	●		180	124	137	2"	2.6
RS32/4Y-180							●	●		180	124	137	2"	2.6
RS12/6B	93/67/46	1.8/1.2/0.8	6/5/3				●	●	●	130	124	137	3/4"	2.3
RS12/6Y							●	●	●	130	124	137	3/4"	2.3
RS15/6B		2.6/2.0/1.2					●	●	●	130	124	137	1"	2.3
RS15/6Y							●	●	●	130	124	137	1"	2.3
RS20/6B		3.3/2.3/1.3					●	●		130	124	137	1 1/4"	2.4
RS20/6Y							●	●		130	124	137	1 1/4"	2.4
RS25/6B-130		3.3/2.3/1.3					●	●		130	124	137	1 1/2"	2.4
RS25/6Y-130							●	●		130	124	137	1 1/2"	2.4
RS25/6B-180		3.9/2.9/1.6					●	●		130	124	137	1 1/2"	2.6
RS25/6Y-180							●	●		180	124	137	1 1/2"	2.6
RS32/6B-180		3.9/2.9/1.6					●	●		180	124	137	2"	2.7
RS32/6Y-180							●	●		180	124	137	2"	2.7

RS25/6GF

RS40/8GF

RS25/6GF

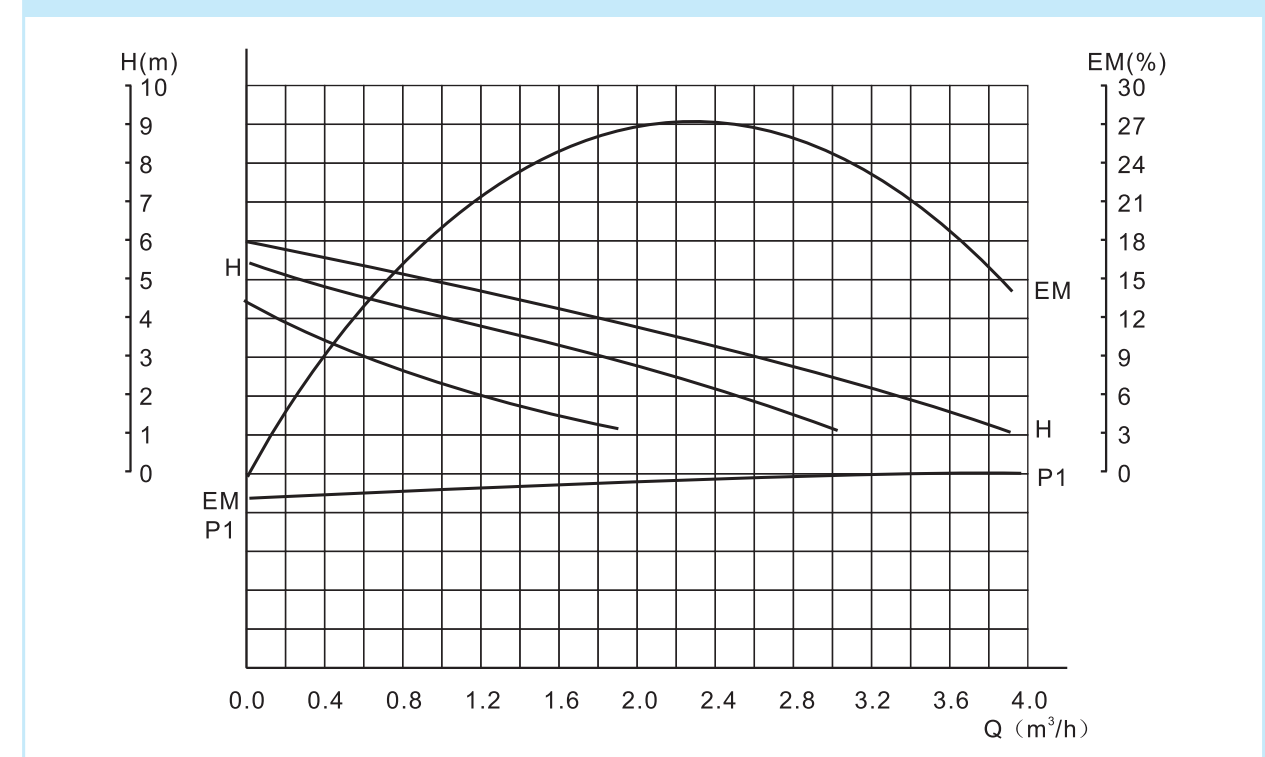

RS40/8GF

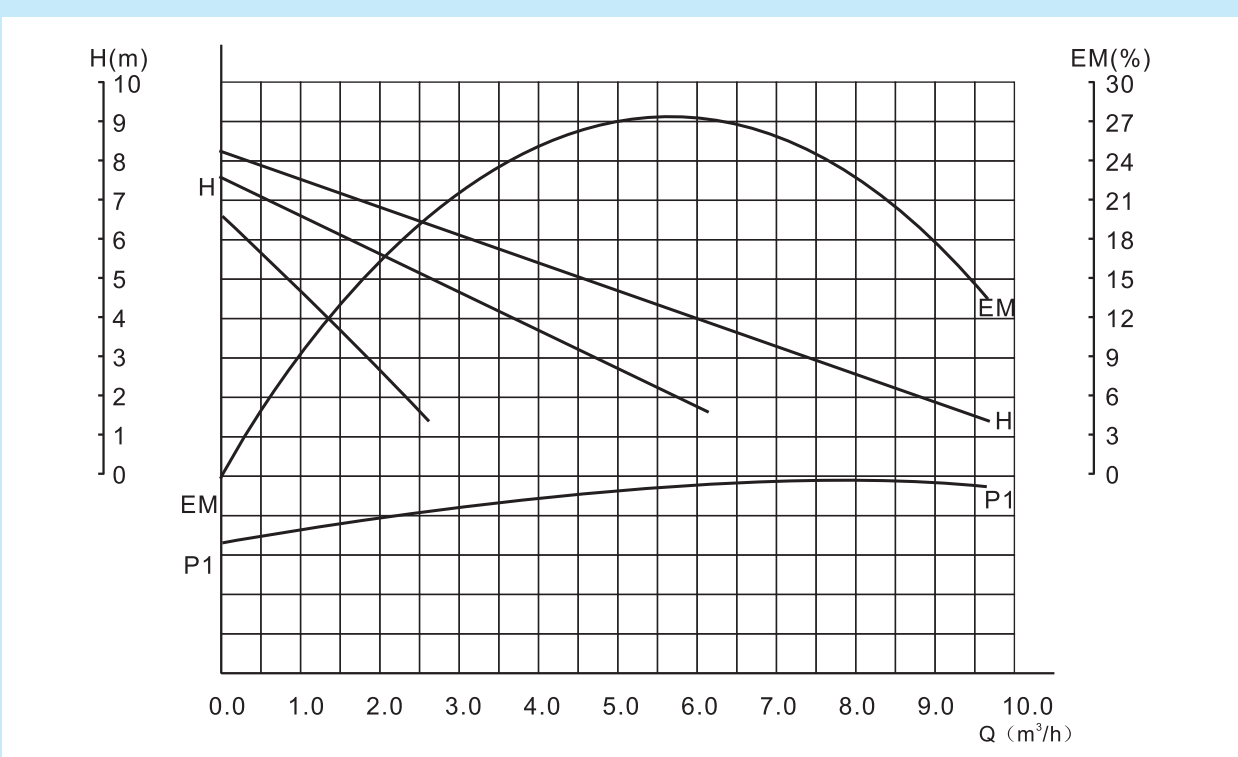

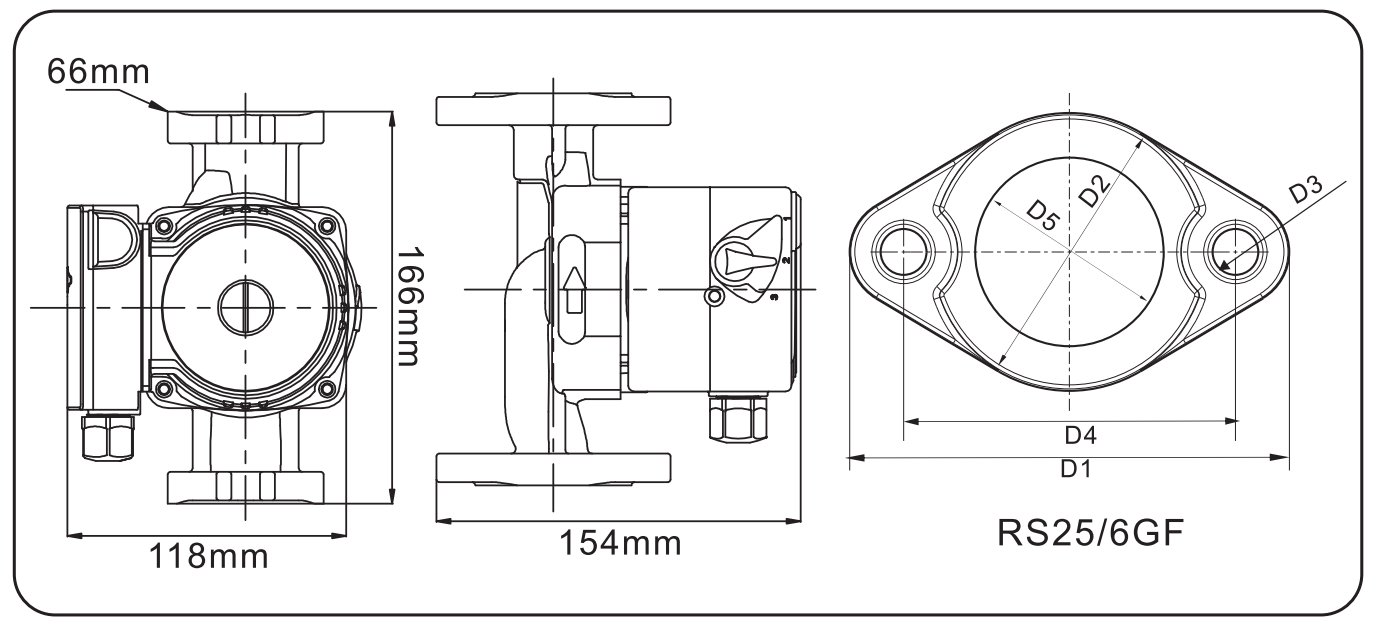

RS25/6GF

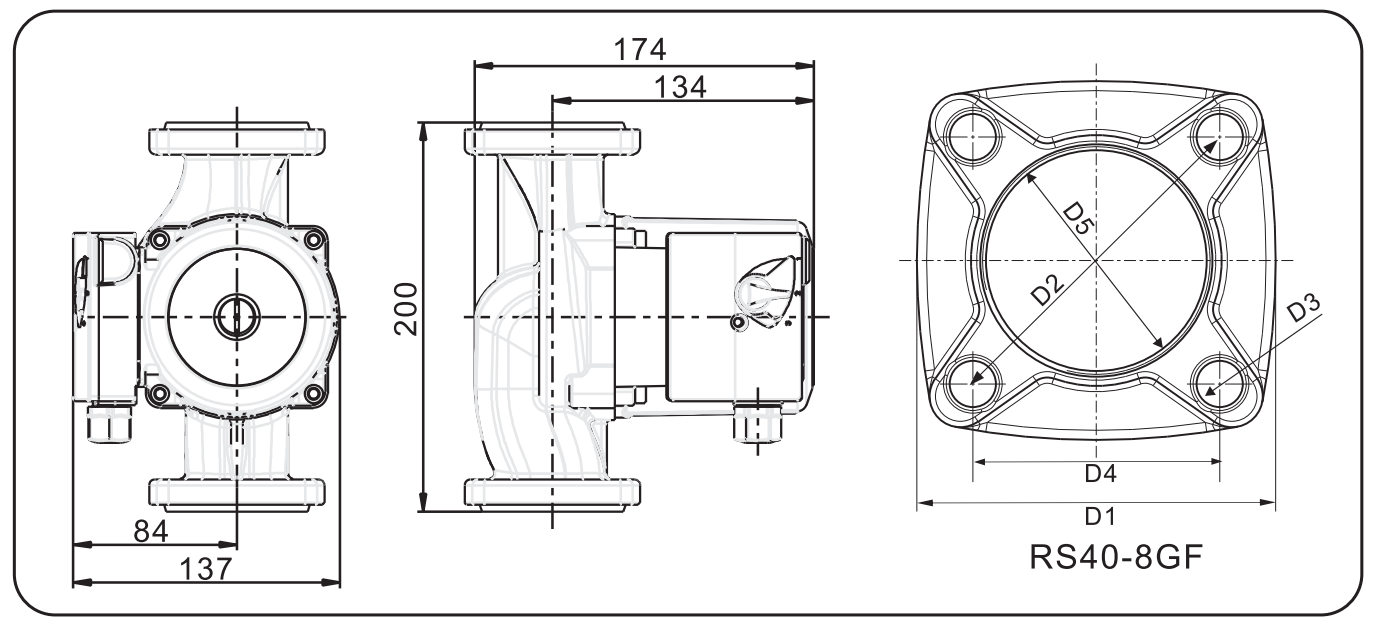

RS40-8GF

技术参数 Technical parameter

Model	Power (W)	Max.Flow (m³/h)	Max.Head (m)	Voltage 220V/50Hz	Voltage 220V/60Hz	Voltage 127V/60Hz	PUMP Dimension(mm) L	B	H	G	Flange Dimension(mm) D1	D2	D3	D4	Weight (Kg)
RS25/6GF	93/67/46	3.5/2.3/1.3	6/5/3	●	●	●	166	118	154	1 1/2"	106	67	13.5	80	3.0
RS40/8GF	270/220/150	9.6/6.2/2.6	8/7.5/6.5	●	●	●	200	147	166	2"	93	90.5	12	64	5.9

GR370GF GR370

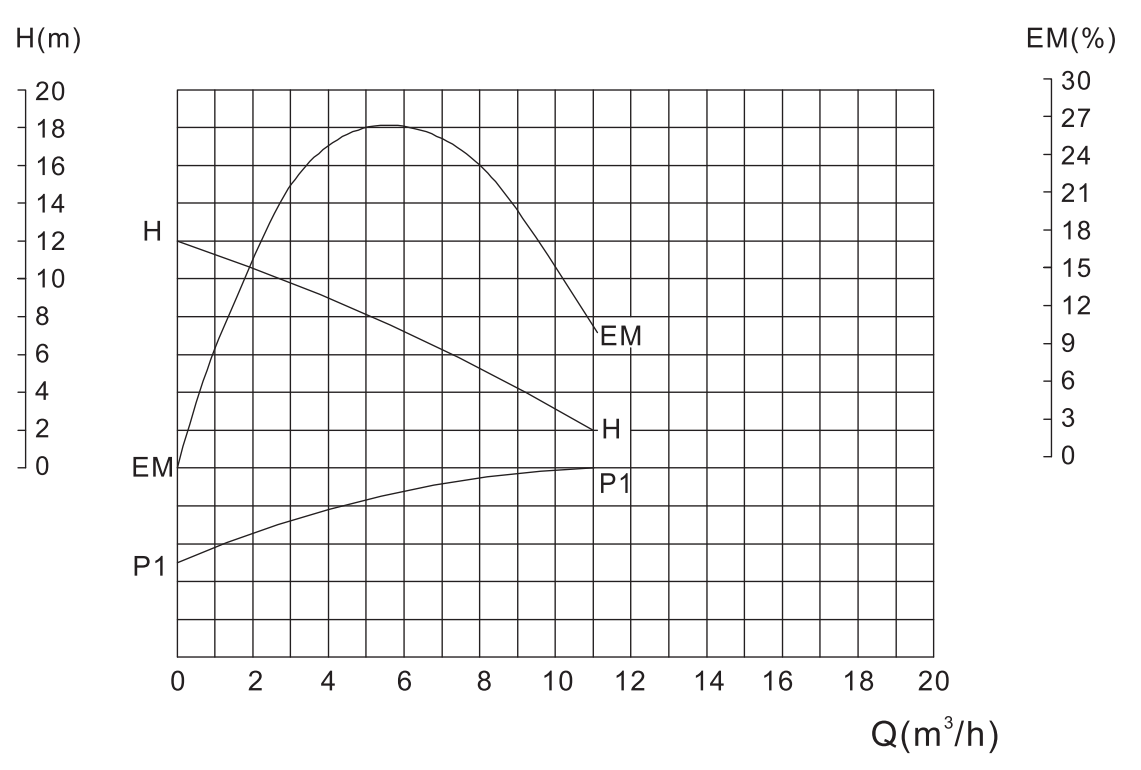

GR550 GR550-DN40 GR550-DN50

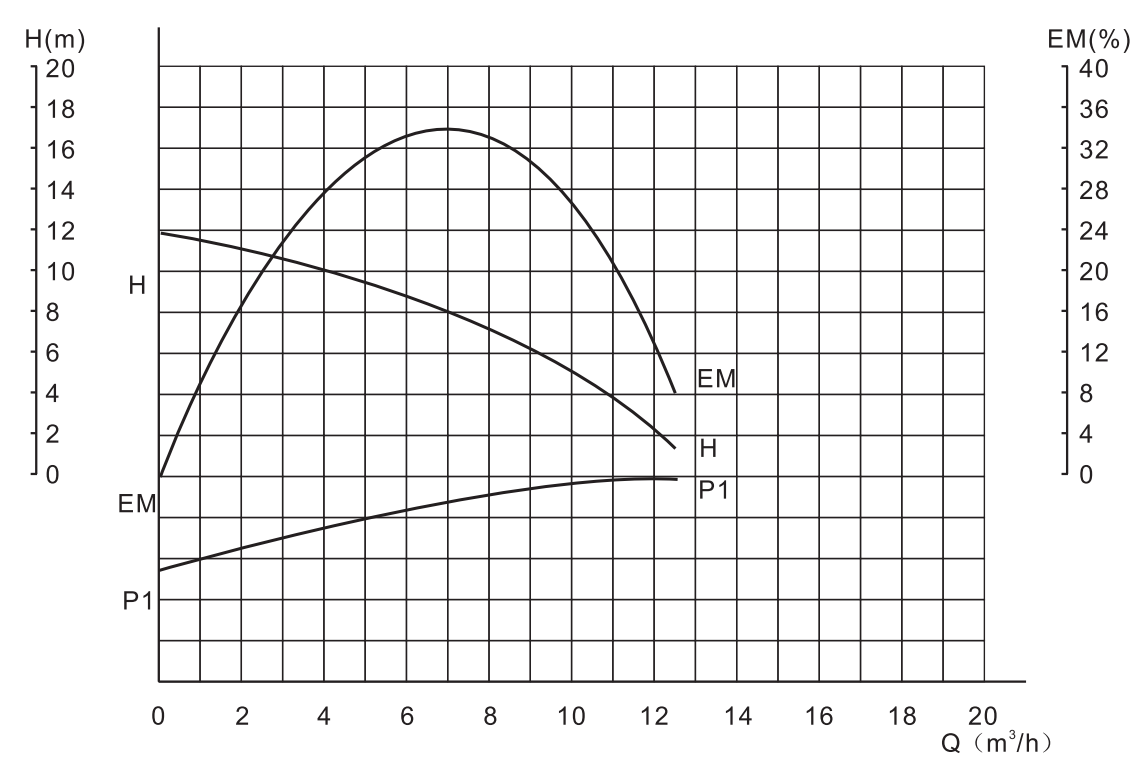

GR750 GR750-DN40 GR750-DN50

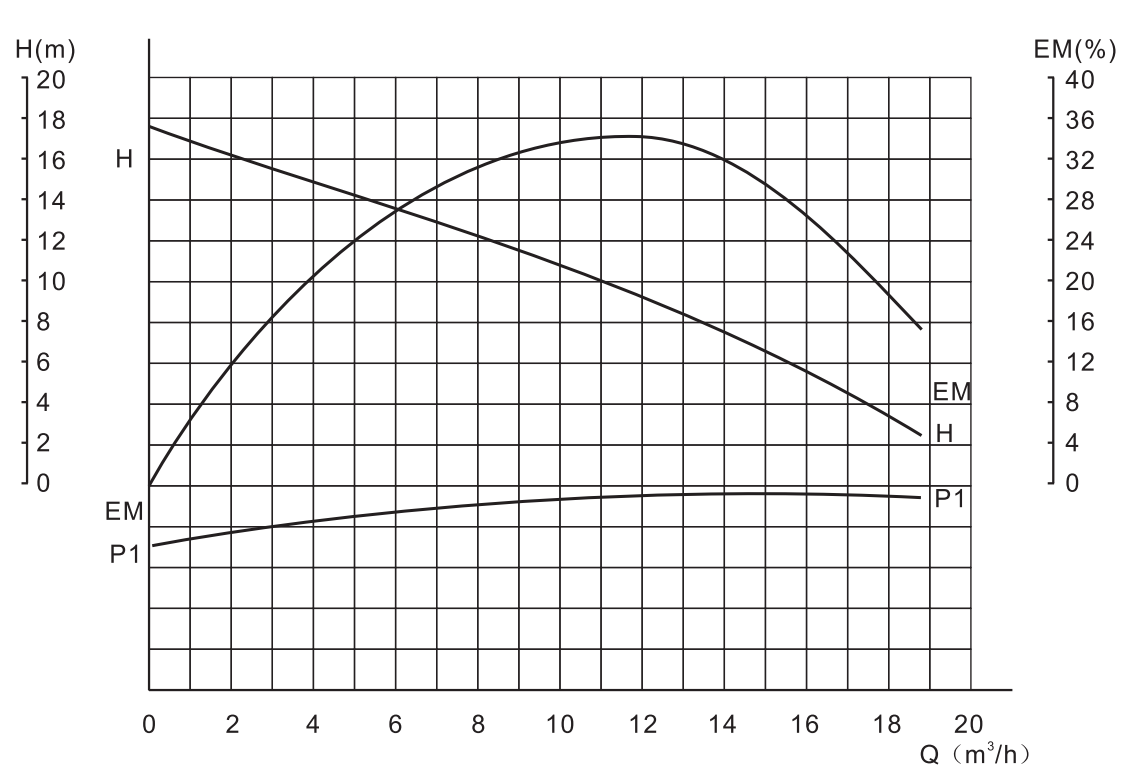

GR1100 GR1100-DN40 GR1100-DN50

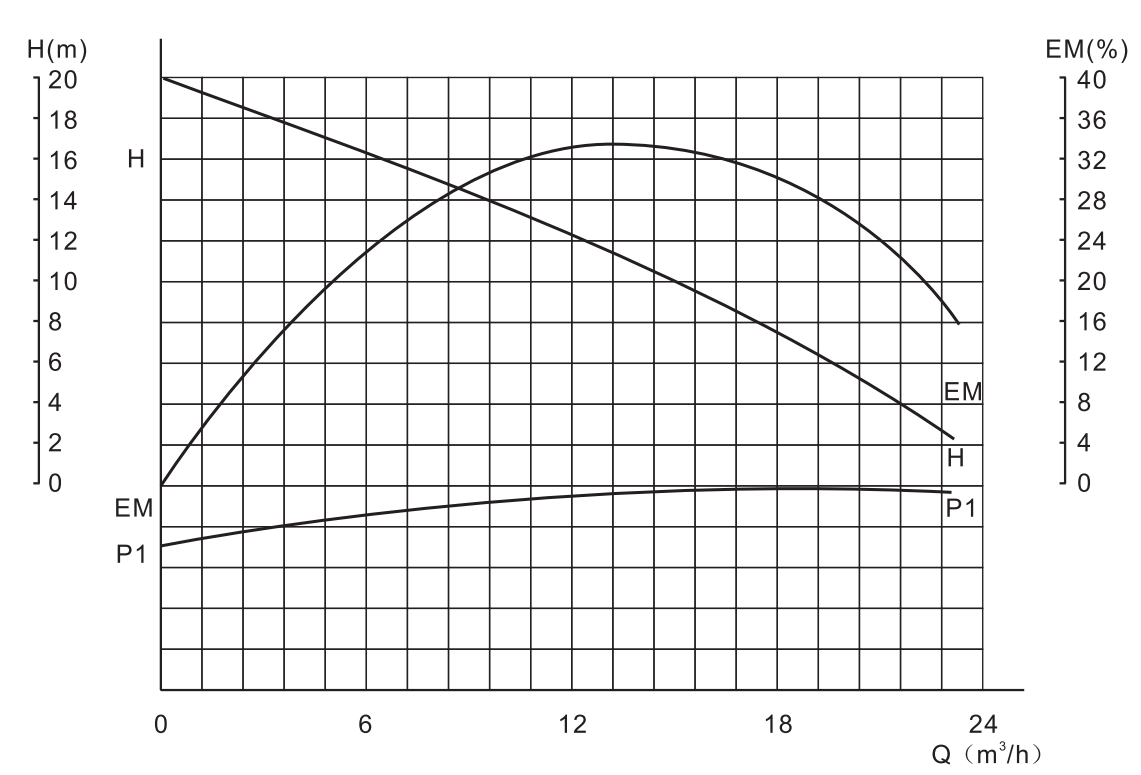

GREENPRO®
CIRCULATING PUMP

GR1500

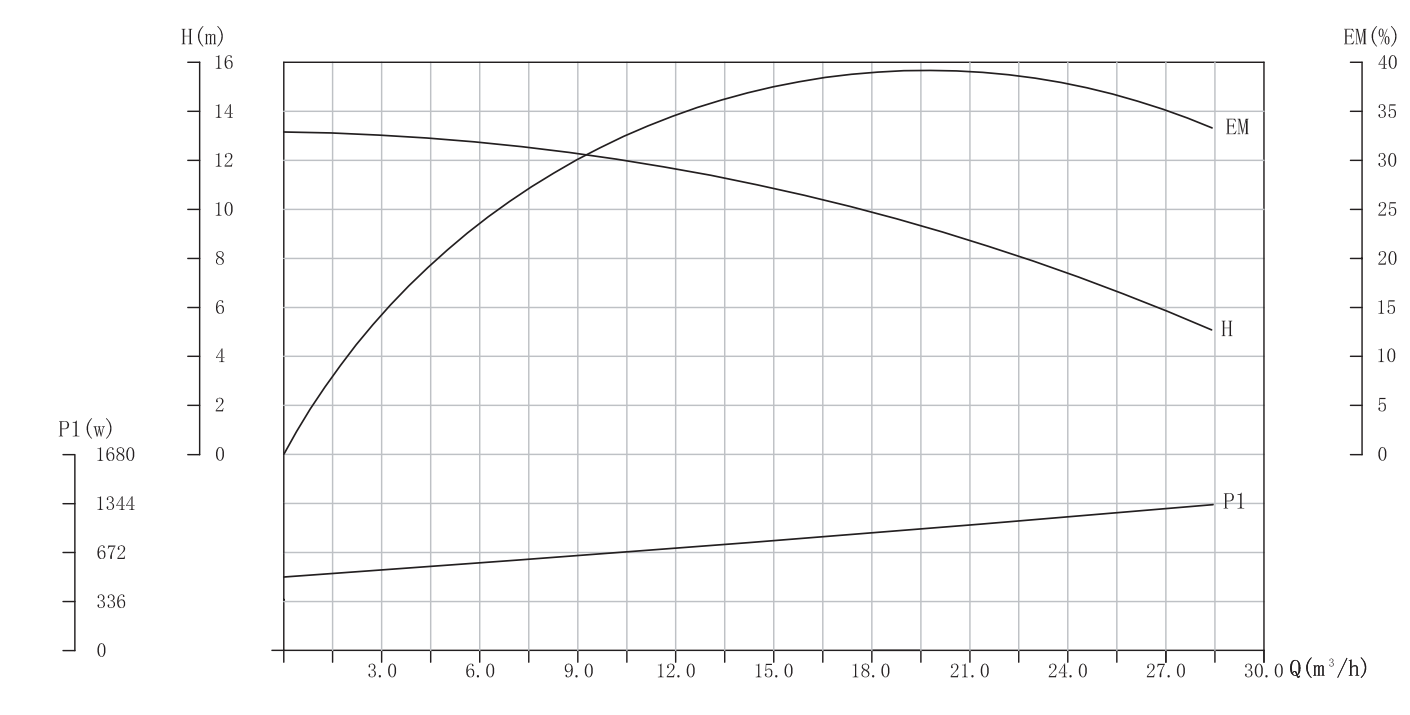

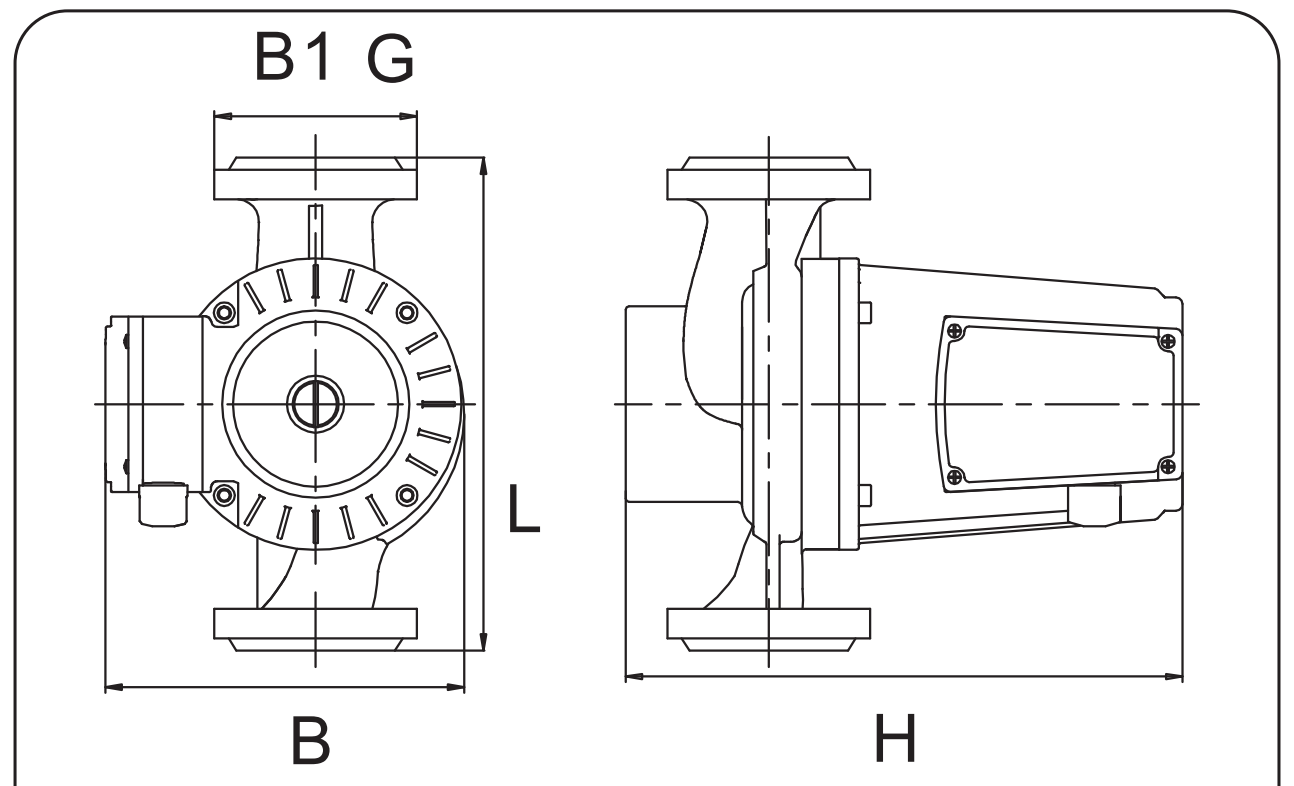

GR370GF GR550 GR750 GR1100 GR1500

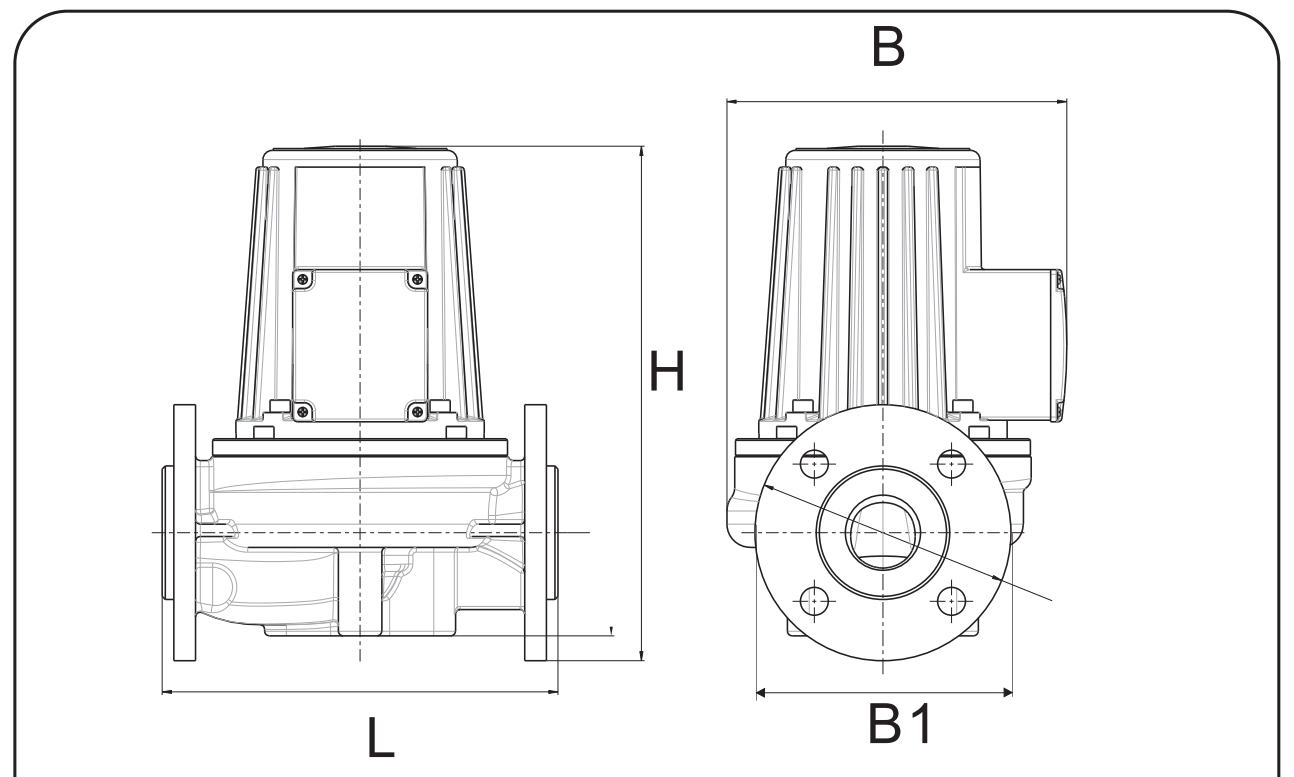

DN40 DN50 DN65

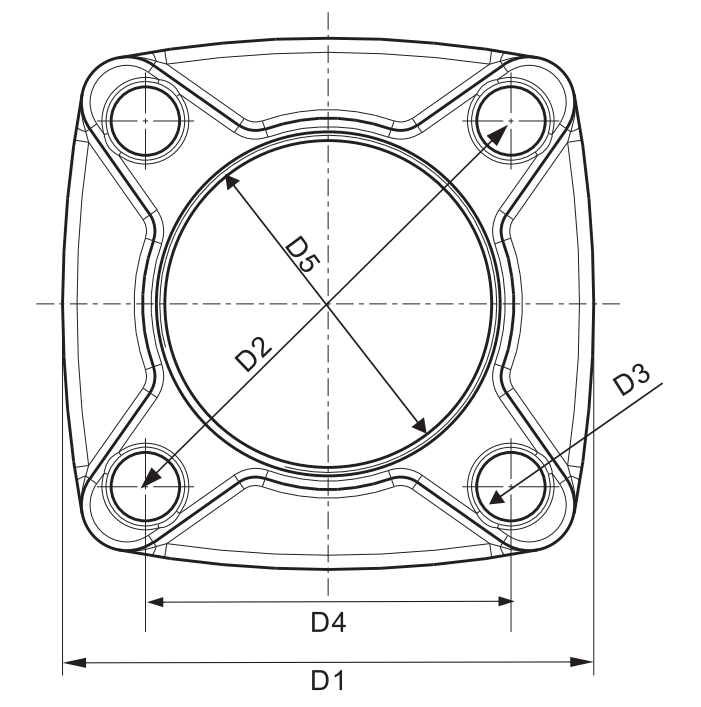

GR370GF

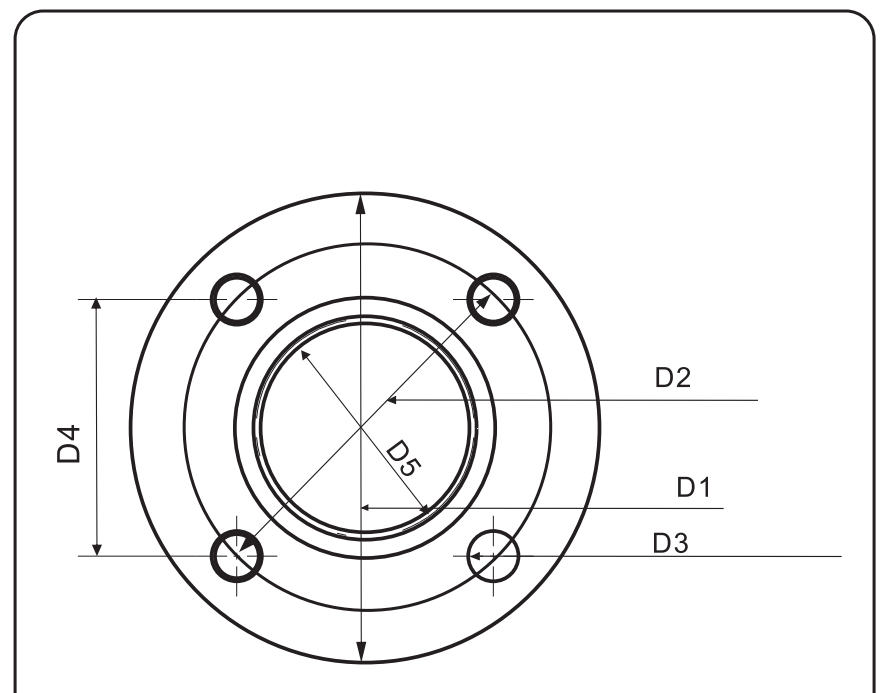

GR550 GR750
GR1100 GR1500

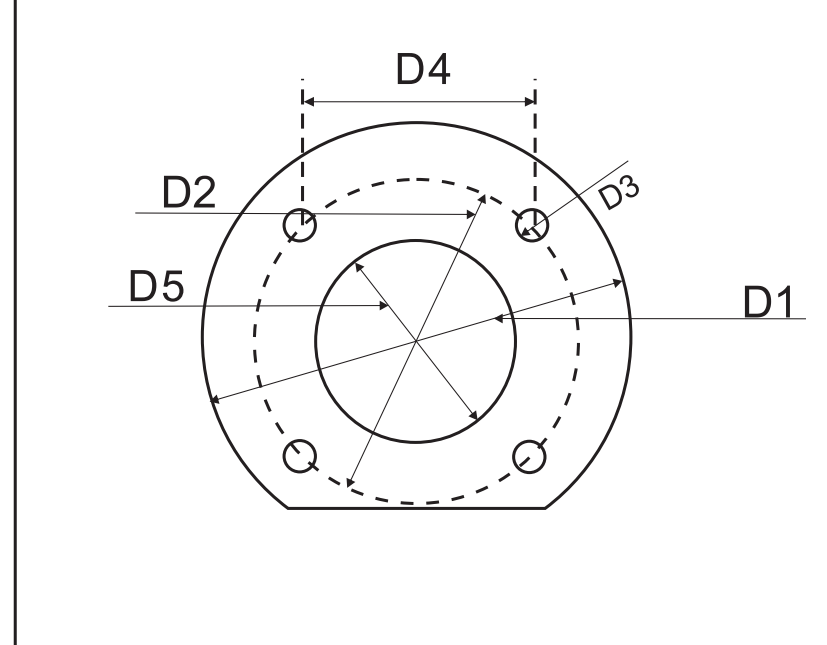

DN40 DN50 DN65

技术参数 Technical parameter

Model	Power	Max.Flow	Max.Head	Voltage			PUMP Dimension(mm)					Flange Dimension(mm)					Weight (Kg)
	(W)	(m^3/h)	(m)	220V/ 50Hz	220V/ 60Hz	380V/ 50Hz	L	B	B1	H	G	D1	D2	D3	D4	D5	
GF370	400	10.2	11				224	180	59.5	210	2"						9
GR370GF	400	10.5	11				224	163	92	253	2"	93	90.5	12	64	57.2	11
GR550	550	10.5	12				225	160	126	253	2"	128	99	12	70	57.2	14.5
GR750	750	18.6	17				255	219	126	314	2"	128	99	12	70	57.2	24
GR1100	1100	23.1	18				255	219	126	314	2"	128	99	12	70	57.2	25
GR550-DN40	550	12	12	●	●	●	225	162	150	255	2"	150	110	12	77.8	57.2	16
GR750-DN40	750	18.6	17				255	219	150	249	2"	150	110	12	77.8	57.2	25
GR1100-DN40	1100	23.1	20				255	219	150	249	2"	150	110	12	77.8	57.2	25.5
GR550-DN50	550	12	12				225	162	165	255	2"	165	125	12	88.4	57.2	16.5
GR750-DN50	750	18.6	17				255	219	165	249	2"	165	125	12	88.4	57.2	26
GR1100-DN50	1100	23.1	20				255	219	165	249	2"	165	125	12	88.4	57.2	27
GR1500-DN65	1500	28	13				300	211	185	304	2.5"	165	145	18	102.5	72.5	28

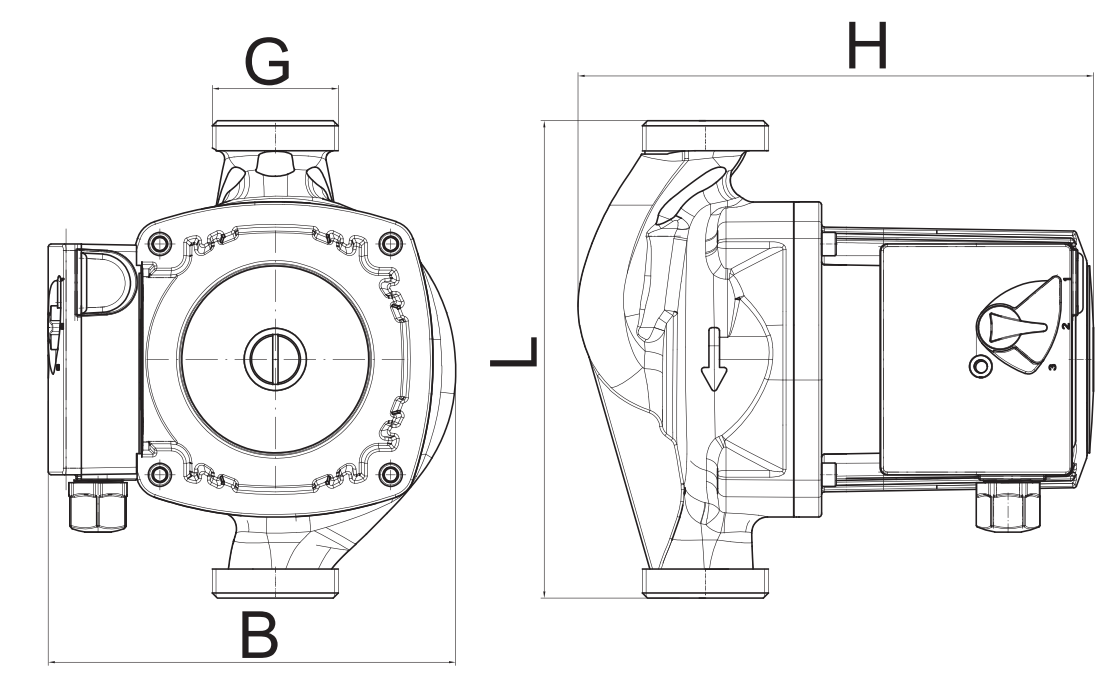

RS 25/10E

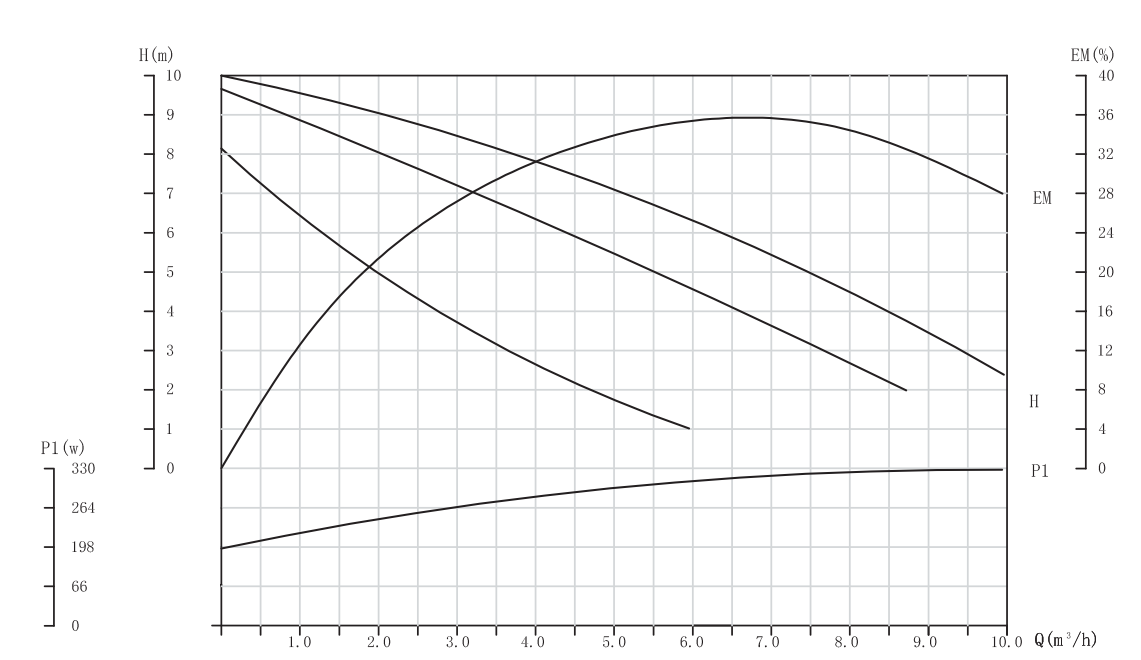

RS 32/10E

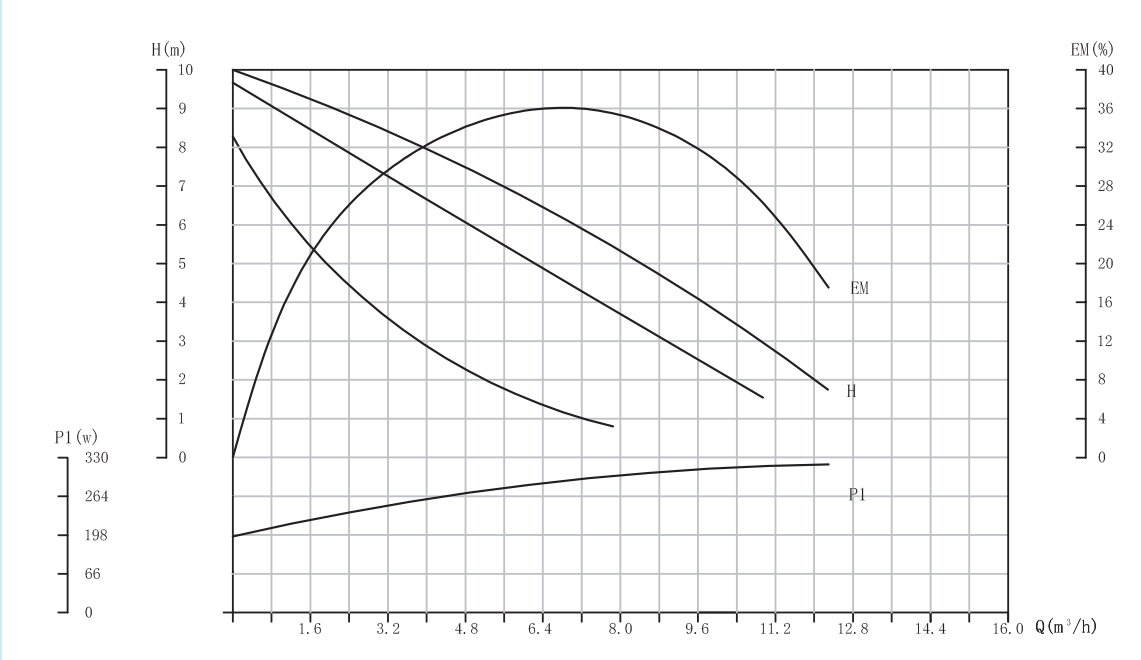

技术参数 Technical parameter

Model	Power	Max.Flow	Max.Head	Voltage			Material of pump body			Dimension(mm)				Weight (Kg)
	(W)	(m^3/h)	(m)	220V/ 50Hz	220V/ 60Hz	127V/ 60Hz	Cast Iron	Brass	Stainless steel	L	B	H	G	
RS 25/10E	330/330/280	12/10/7.8	10/9.5/8	●	●	●	●			180	154	195	1 1/2"	5.3
RS 32/10E	330/330/280	12/10/7.8	10/9.5/8	●	●	●	●			180	154	195	2"	5.8

WK1 TYPE

WK2 TYPE

YJWK

温度控制

根据管路的水温自动启停

时段控制

水泵周期循环，自动运转。
根据设定的温度每天设置6个时段，水泵工作根据使用者的需要，对时段，温度，休息天进行编程。

Function:

Temperature Control

The pump switches on/off based on the temp. of water in pipes.

Time Control

Circulating on weekly basis, pump can work automatically.
The pump can be programed for specific Purpose----6phases can be set during a day according to temperature that is set beforehand.

技术参数 Technical parameter

Model	Simple Temp. control	Electronical Temp. control	Internal senser Temp. control	Voltage			Pump housing design				Performance(Max.Head)				Function	
				220V/ 50Hz	220V/ 60Hz	127V/ 60Hz	G type	T type	E type	D type	4m	5m	6m	8m	Time control	Temp control
WK1	●						●	●	●		●	●	●	●		●
WK2		●		●	●	●	●	●	●		●	●	●	●	●	●
YJWK			●							●	●	●	●		●	●

材质 Materials	
泵体 Pump Body	精钢铸造铸铁 Cast Iron
叶轮 Impeller	PPO改性工程塑料 PPO
轴 Shaft	AISI304不锈钢 S.S 304
机械密封 Mechanical Seal	车制碳化硅&美国摩根石墨（120℃） Silicon carbide & graphite(120℃)
轴承 Bearing	定制热水轴承 customized hot water bearing
电机 Motor	国标F级高温铜线 Copper

HOT WATER CIRCULATION PUMP
热水管道循环泵

干转子泵\Dry rotor pump
小型管道泵\Small inline pump

特点/Feature:

管道式安装，连接方便\In-line,easy installation
重量轻，合理设计\Light weight, reasonable design

应用/Application:

热水循环和采暖系统\Hot water circulation and heating system
空调系统\Air-conditioning systems
工业循环系统\Industrial circulation systems
家庭用水增压\General pressure boosting in household

热水管道循环泵 HOT WATER CIRCULATION PUMP

型号 Model	GPH-102EM	GPH-150EM	GPH-255EM	GPH-257EM	GPH-751EM	GPH-751DM	GPH-1501DM	GPH-2201DM
电气连接 Electrical connection								
电源参数	220V/50Hz					380V/50Hz		
输入功率(W)	150	220	330	450	1050	900	1750	2800
输出功率(W)	120	125	200	370	750	750	1500	2200
应用场合 Applications								
输送介质	清水							
介质温度(℃)	0~100							
性能参数 Performance data								
最大扬程(m)	6	5	15	8	20	20	25	30
额定扬程(m)	4	3	10	4	16	16	15	20
最大流量(m³/h)	10	15	6.5	17.5	18	18	25	28
额定流量(mm)	6	11	3	14	7.8	7.8	16	18.5
进口尺寸(mm)	40	50	40	50	50	50	50	50
出口尺寸(mm)	40	50	40	50	50	50	50	50
最大承压(bar)	5.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0
防护等级	IP44	IP44	IP44	IP44	IP44	IP44	IP44	IP44
重量(kg)	8	10.5	9	16	20	20	32	34

GPH102EM\150EM\255EM\257EM\751EM

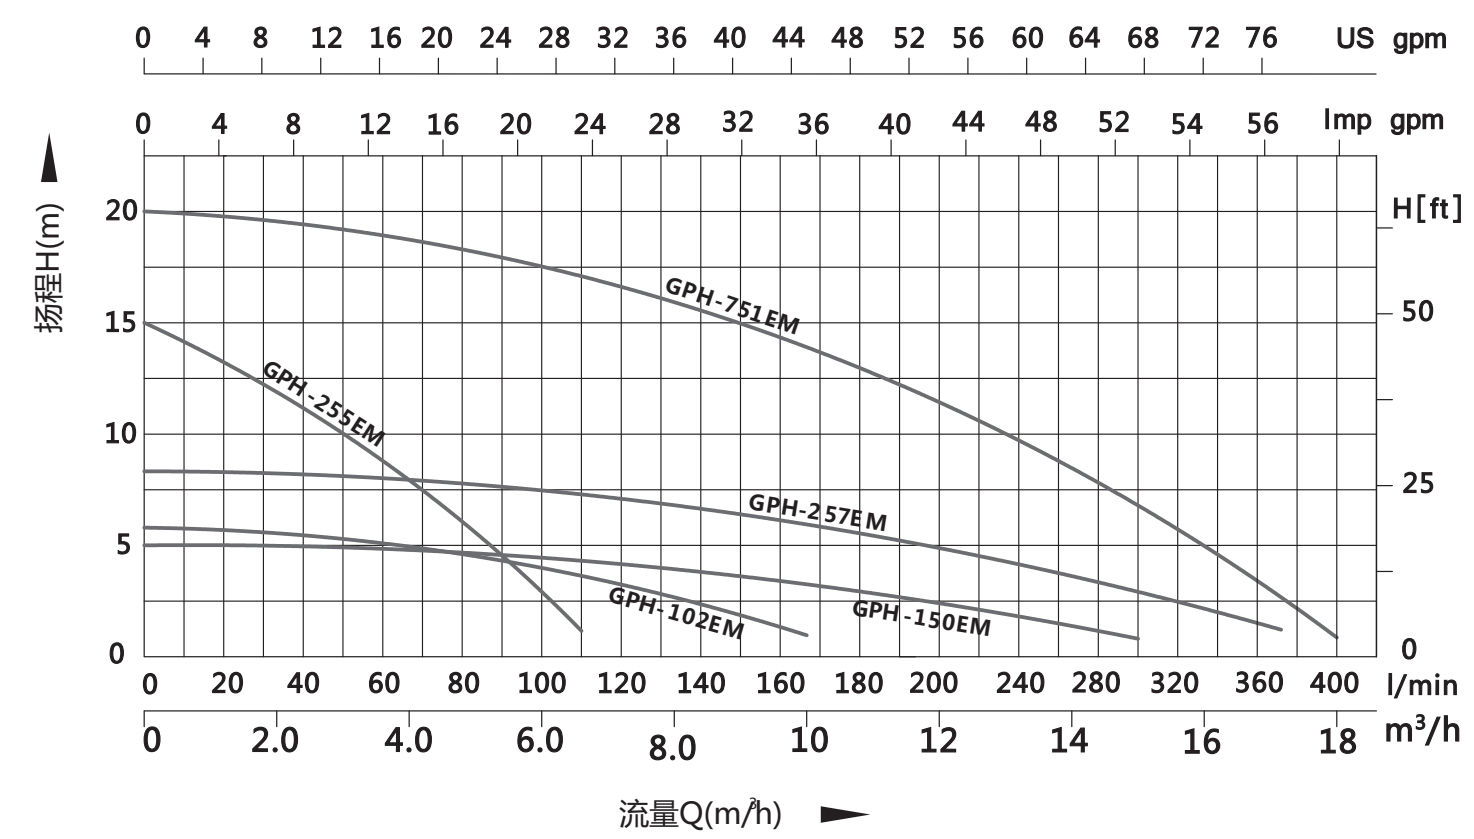

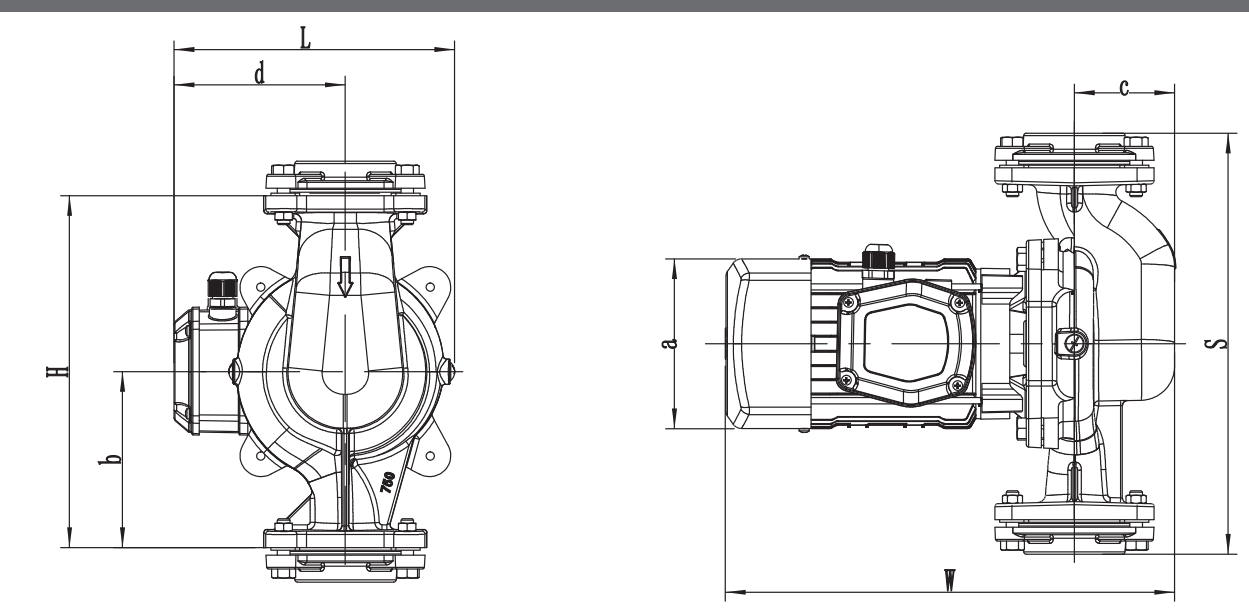

型号	W	L	H	S	a	b	c	d
GPH-102EM	270	190	210	274	ϕ134	105	46	118
GPH-150EM	302	196	260	311	ϕ134	130	69	119
GPH-255EM	256	194	260	316	ϕ134	130	44	118
GPH-257EM	330	202	280	330	ϕ134	140	73	118
GPH-751EM	353	206	280	330	ϕ134	140	78	119

GPH751DM\1501DM\2201DM

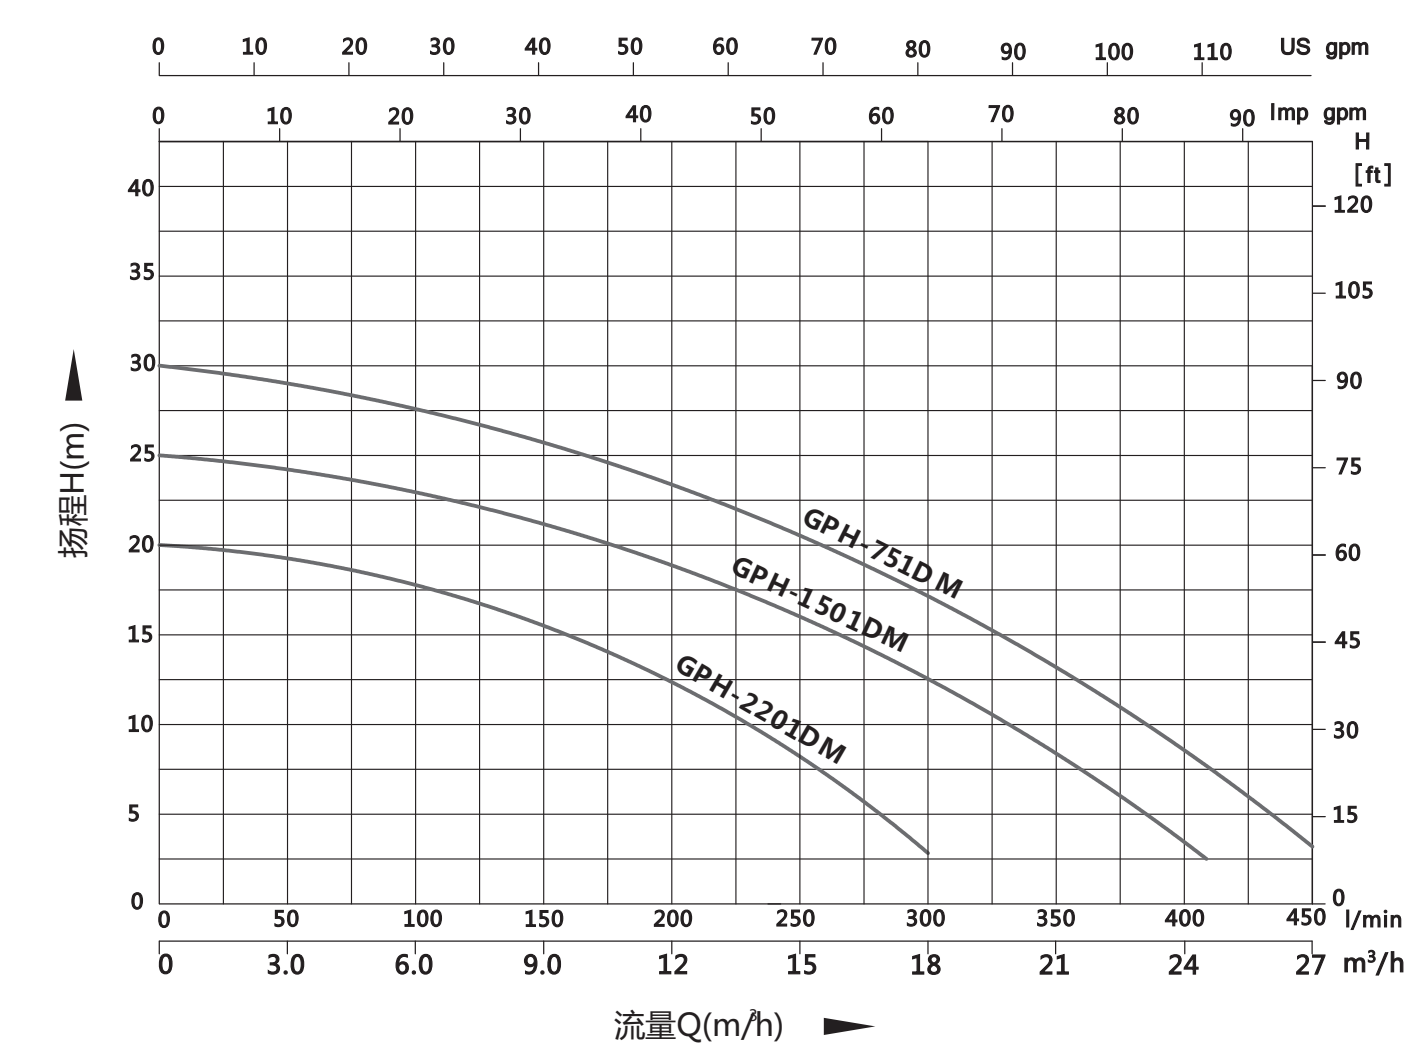

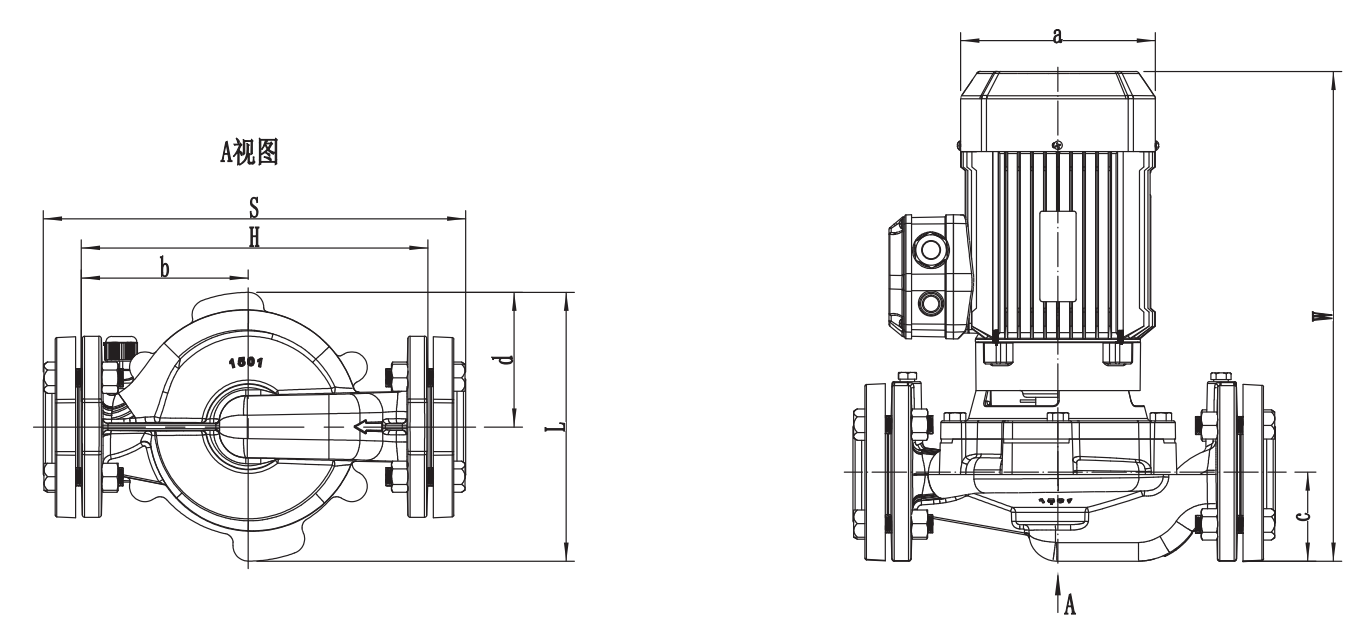

型号	W	L	H	S	a	b	c	d
GPH-751DM	353	204	280	330	ϕ134	140	78	121
GPH-1501DM	434	268	310	372	ϕ172	160	78	150
GPH-2201DM	434	268	310	372	ϕ172	160	78	150

材质 Materials	
泵体 Pump Body	精钢铸造铸铁 Cast Iron
叶轮 Impeller	PPO改性工程塑料 PPO
轴 Shaft	AISI304不锈钢 S.S 304
机械密封 Mechanical Seal	车制碳化硅&美国摩根石墨（120℃） Silicon carbide & graphite(120℃)
轴承 Bearing	定制热水轴承 customized hot water bearing
电机 Motor	国标F级高温铜线 Copper

HOT WATER HORIZONTAL PIPELINE PUMP
热水卧式管道泵

各种机器配套\For various machinery

离心泵\Centrifugal pump

特点/Feature:

使用寿命长、大流量、高扬程\Long service life, large flow and high lift
紧密结构设计\Compact design

应用/Application:

各种机器配套\For various machinery
家庭用水增压\Pressure boosting in household
小型暖通空调循环系统\Small HVAC circulation system

热水卧式管道泵 HOT WATER HORIZONTAL PIPELINE PUMP

型号 Model	PU-201EM	PU-202EM	PU-301EM	PU-402EM	PU-403EM	PU-601EM	PU-750EM	PU-751EM	PU-1100EM	PU-1500EM
电气连接 Electrical connection										
电源参数	220V/50Hz									
输入功率(W)	320	320	550	720	660	800	1100	1200	1500	1950
输出功率(W)	200	200	370	400	400	600	750	800	1100	1500
应用场合 Applications										
输送介质	清水									
介质温度(℃)	0~90									
性能参数 Performance data										
最大扬程(m)	16	16	20	23	23	28	26	32	30	24.
额定扬程(m)	10	10	15	16	16	20	18	20	23	20
最大流量(m^3/h)	5	5	5.3	6.5	6.5	7.5	12	7.5	16	28
额定流量(mm)	3	3	3	4	4	4	6.6	5	8	16
进口尺寸(mm)	25	32	25	32	25	25	32	32	40	50
出口尺寸(mm)	25	32	25	32	25	25	32	32	40	50
最大承压(bar)	50	50	50	5.0	5.0	5.0	4.0	4.0	4.0	4.0
防护等级	IP44	IP44	IP44	IP44	IP44	IP44	IP44	IP44	IP44	IP44
重量(kg)	7	7	9	10	10	11.5	12.5	13	19	21

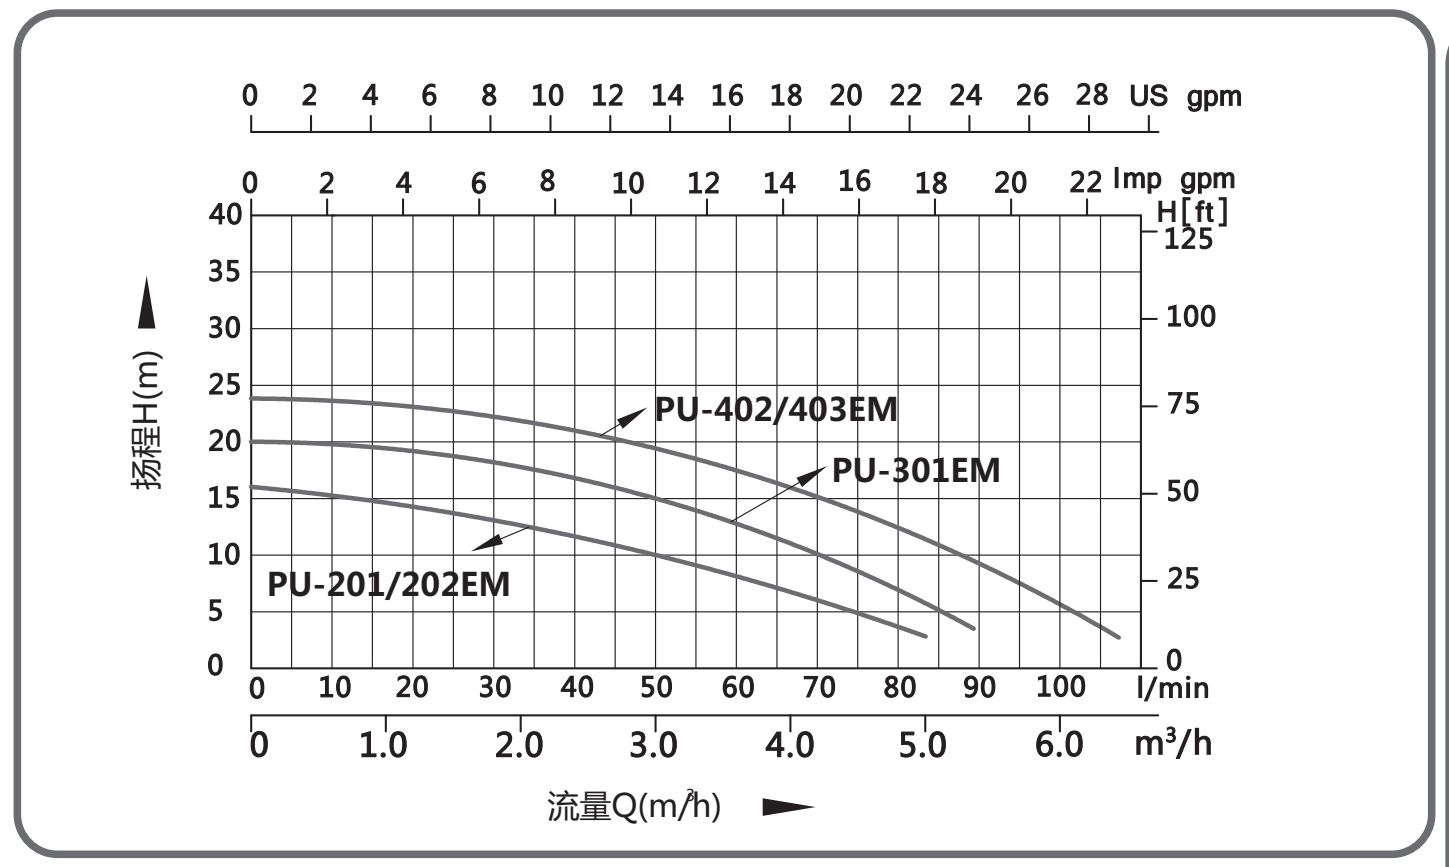

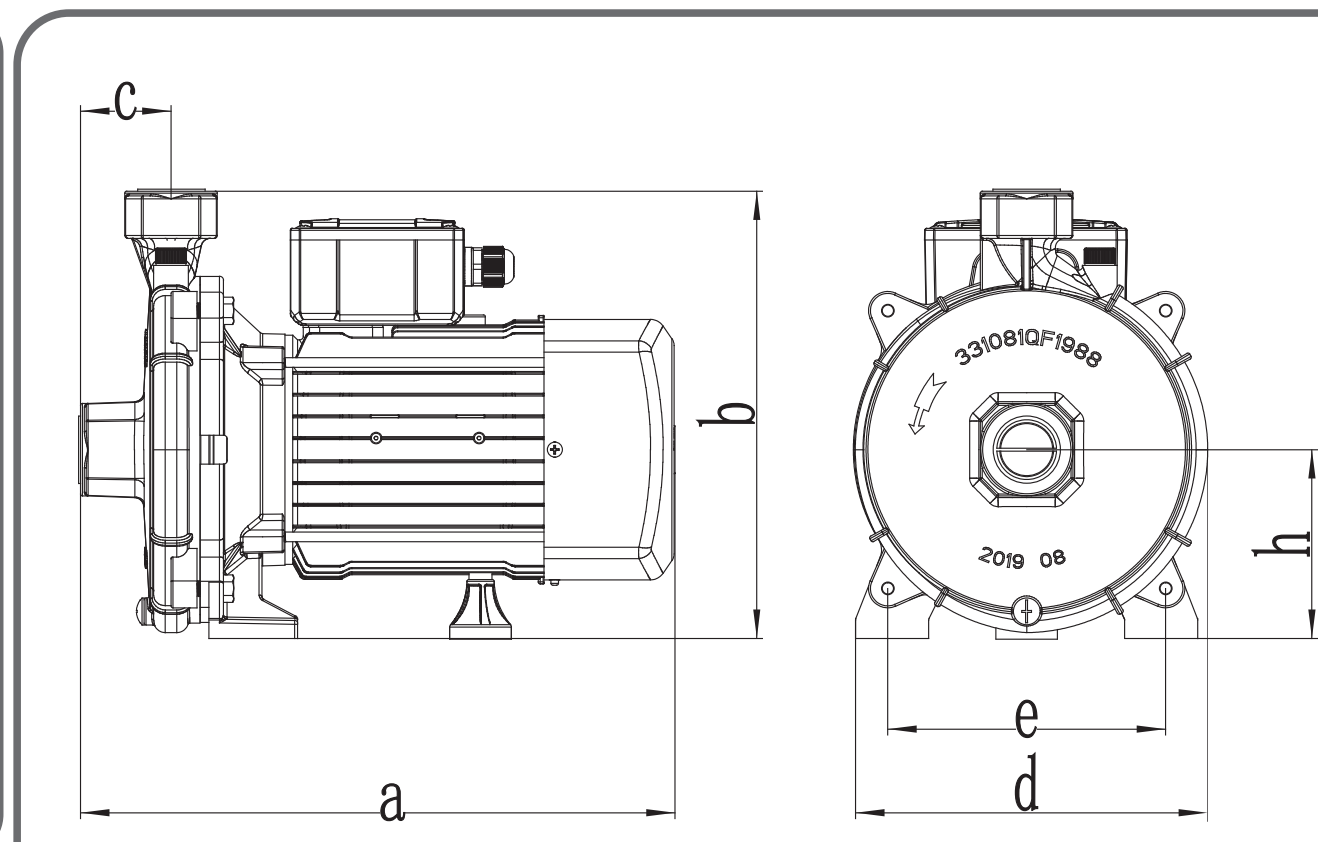

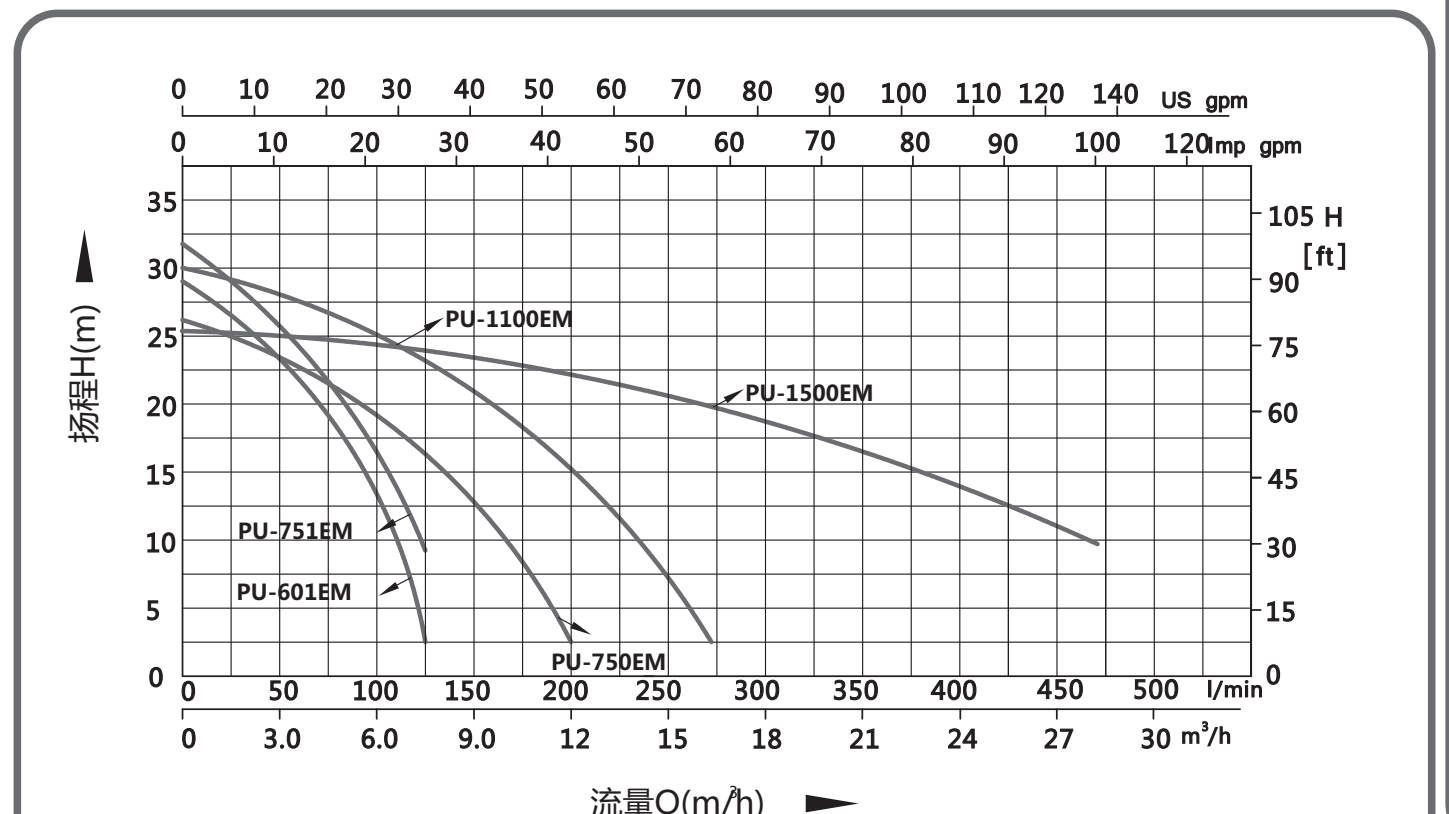

型 号	a	b	c	d	e	h
PU-201/202EM	255	194	45	142	104	75
PU-301EM	280	196	45	159	104	81
PU-402/403EM	281	220	40	172	124	95
PU-601EM	307	230	47	180	140	98
PU-750EM	327	233	53	183	140	98
PU-751EM	320	235	46	183	140	98
PU-1100EM	348	254	52	188	140	103
PU-1500EM	355	246	59	185	140	103

材质 Materials	
泵体 Pump Body	精钢铸造铸铁 Cast Iron
叶轮 Impeller	PPO改性工程塑料 PPO
轴 Shaft	AISI304不锈钢 S.S 304
机械密封 Mechanical Seal	车制碳化硅&美国摩根石墨（120℃） Silicon carbide & graphite(120℃)
轴承 Bearing	定制热水轴承 customized hot water bearing
电机 Motor	国标F级高温铜线 Copper

增压泵 BOOSTER PUMP

各种机器配套\For various machinery

离心泵\Centrifugal pump

特点/Feature:

使用寿命长、大流量、高扬程\Long service life, large flow and high lift
紧密结构设计\Compact design

应用/Application:

各种机器配套\For various machinery
家庭用水增压\Pressure boosting in household
小型暖通空调循环系统\Small HVAC circulation system

型号 Model	GB 12-12
电气连接 Electrical connection	
电源参数	220V/50Hz
输入功率(W)	320
输出功率(W)	200
应用场合 Applications	
输送介质	清水
介质温度(℃)	4~95
性能参数 Performance data	
最大扬程(m)	12
额定扬程(m)	9.5
最大流量(m³/h)	2.8
额定流量(mm)	1.2
进口尺寸(In)	3/4"
出口尺寸(In)	3/4"
最大承压(bar)	5.0
防护等级	IP44
重量(kg)	8

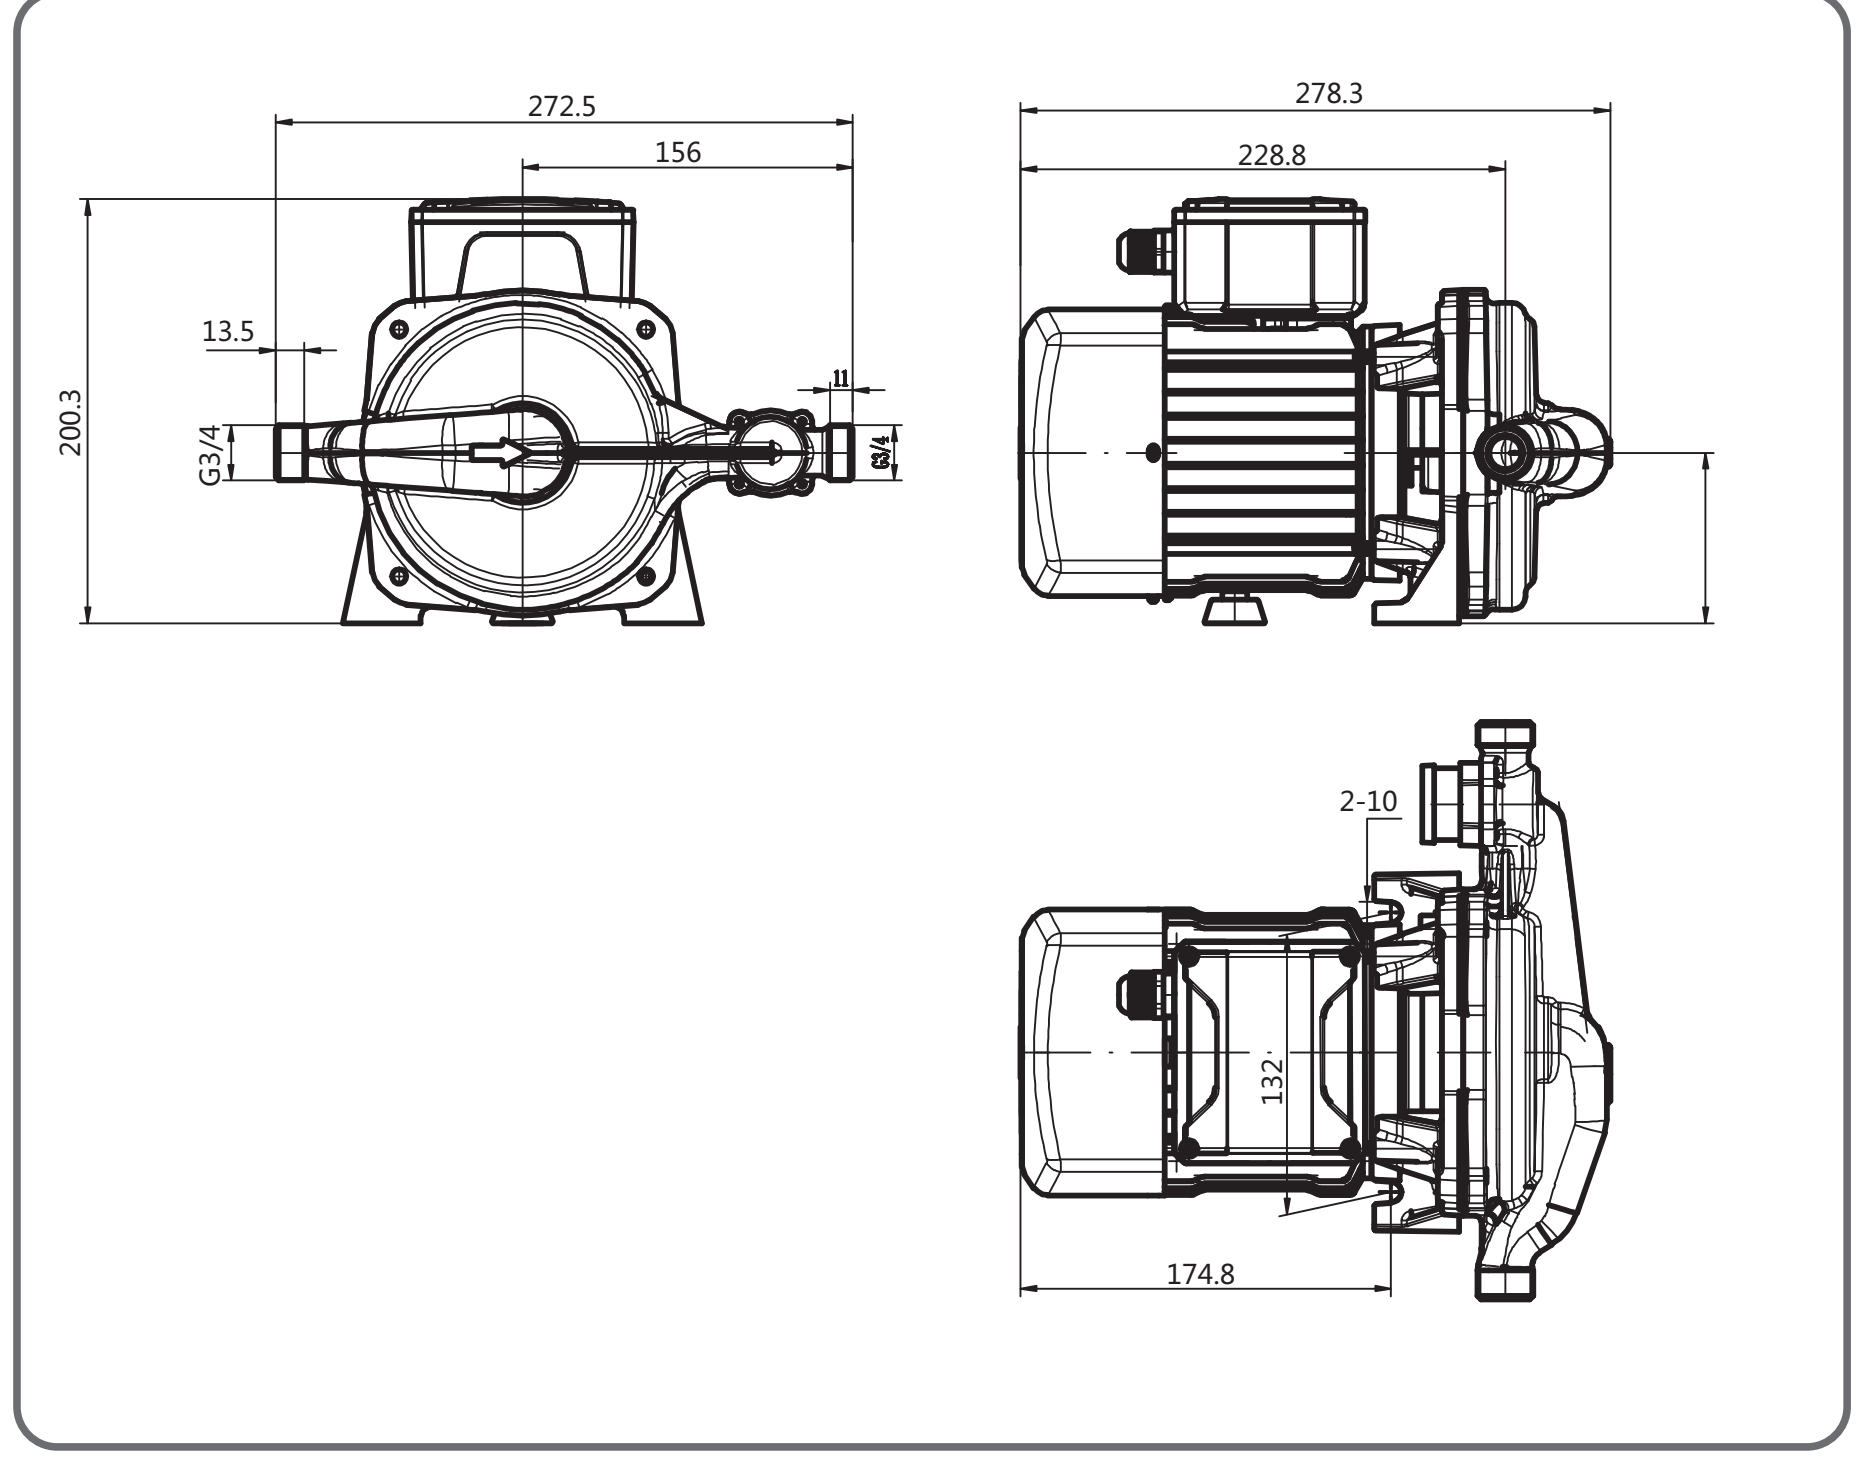

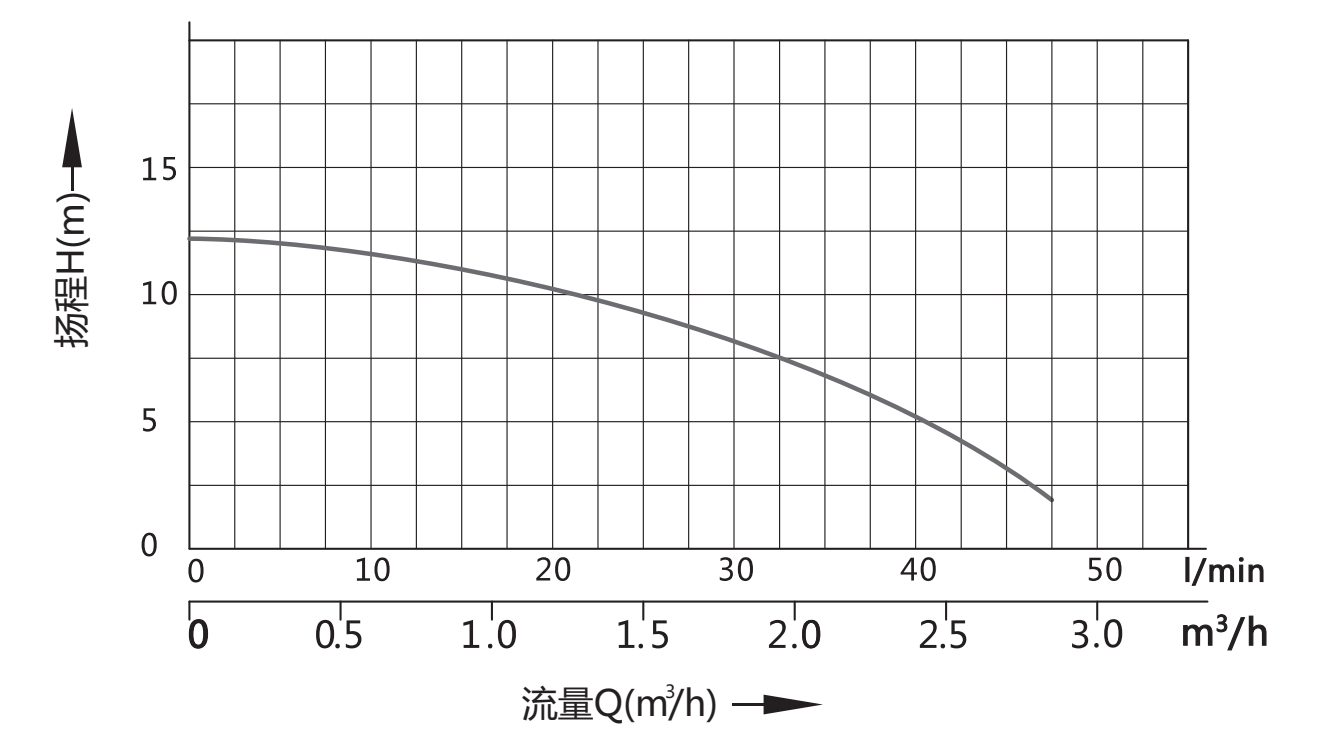

屏蔽式循环泵
CIRCULATING PUMP

各种机器配套\For various machinery

离心泵\Centrifugal pump

特点/Feature:

使用寿命长、大流量、高扬程\Long service life, large flow and high lift
紧密结构设计\Compact design

应用/Application:

各种机器配套\For various machinery
家庭用水增压\Pressure boosting in household
小型暖通空调循环系统\Small HVAC circulation system

型号 Model	RS 25/9	RS 25/12	RS 32/9	RS 32/12
电气连接 Electrical connection				
电源参数	220V/50Hz			
功率(W)	330	480	350	550
最大扬程(m)	9	12	9	12
最大流量(m³/h)	7.8	9.2	9	11.5
口径(nch)	1 1/2	1 1/2	2	2

RS 25/9 RS32/9

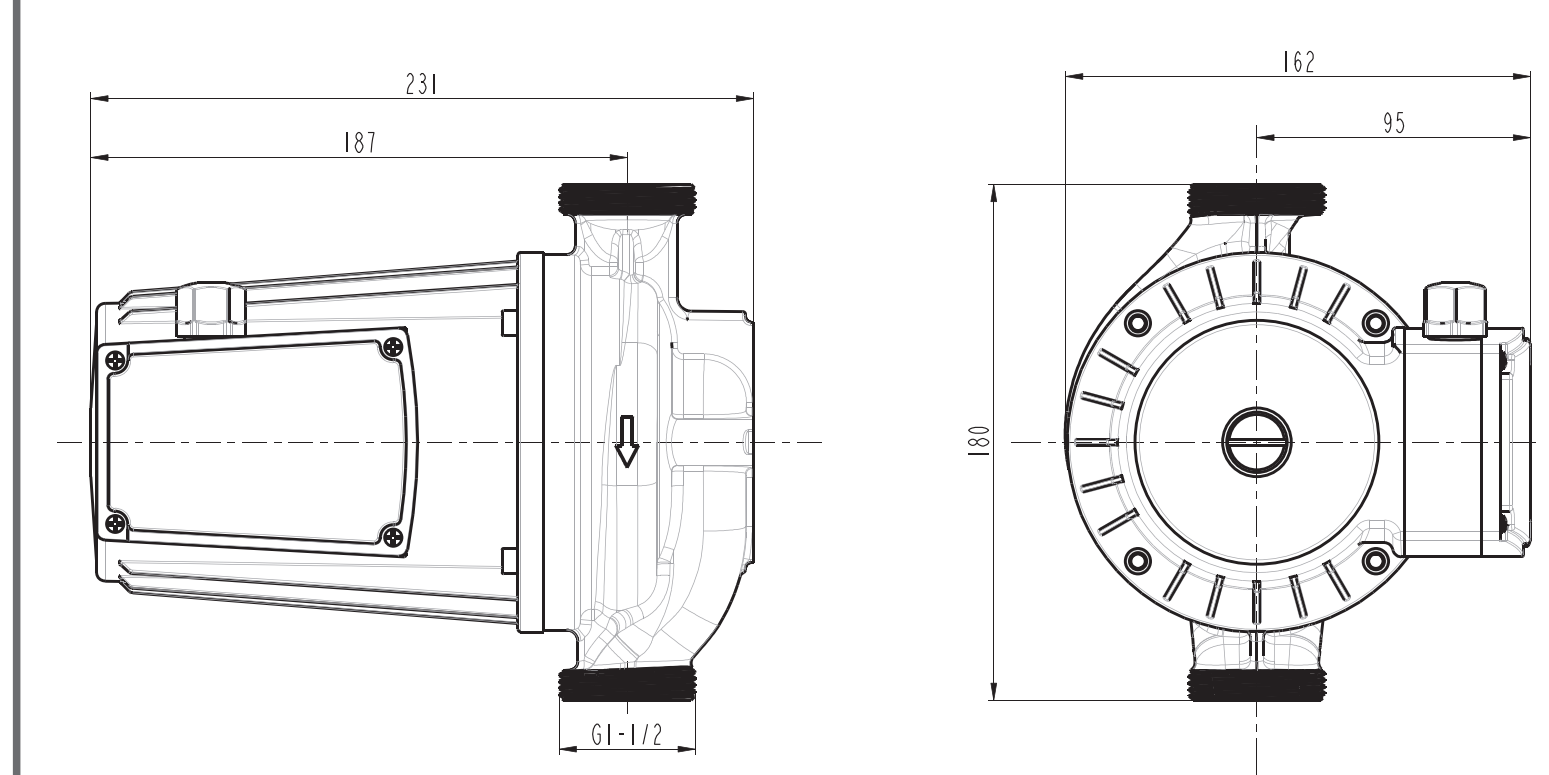

RS 25/12 RS32/12

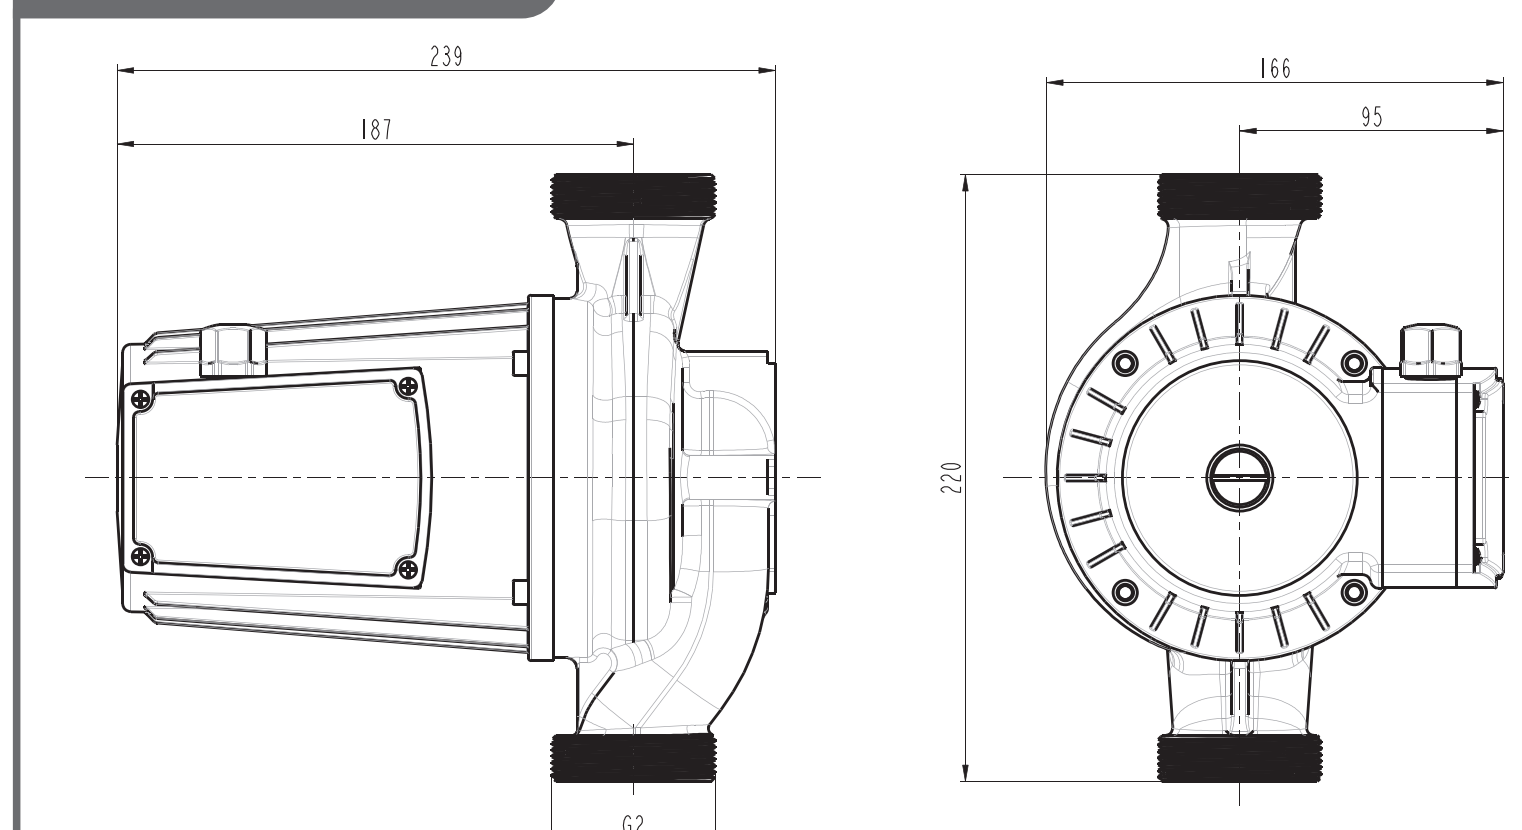

RS 25/9

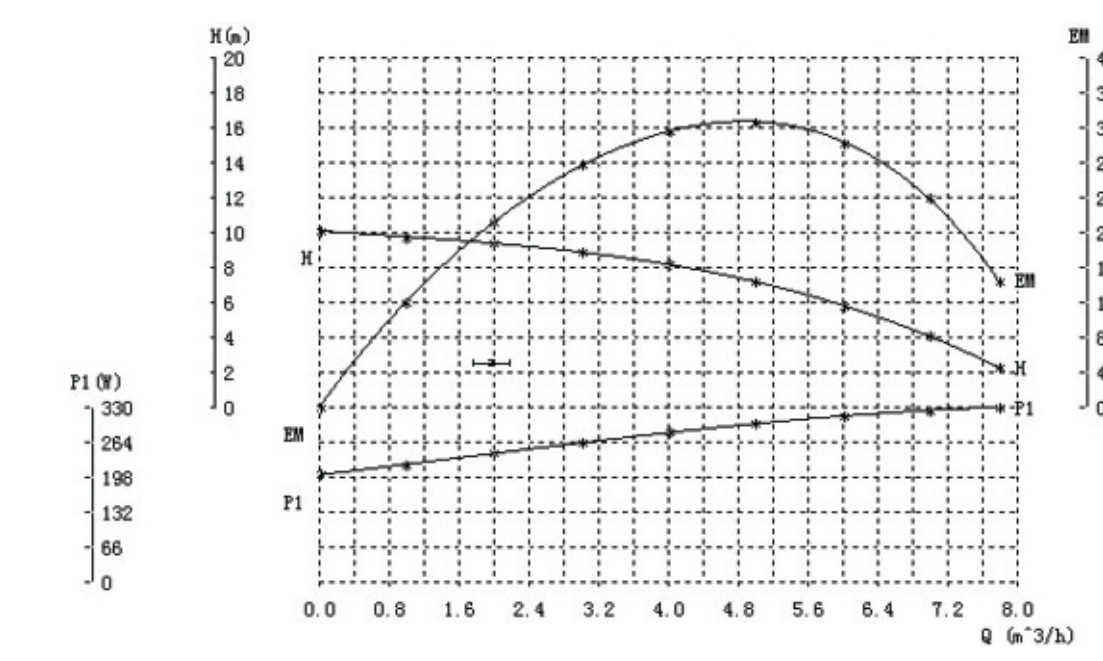

RS 32/9

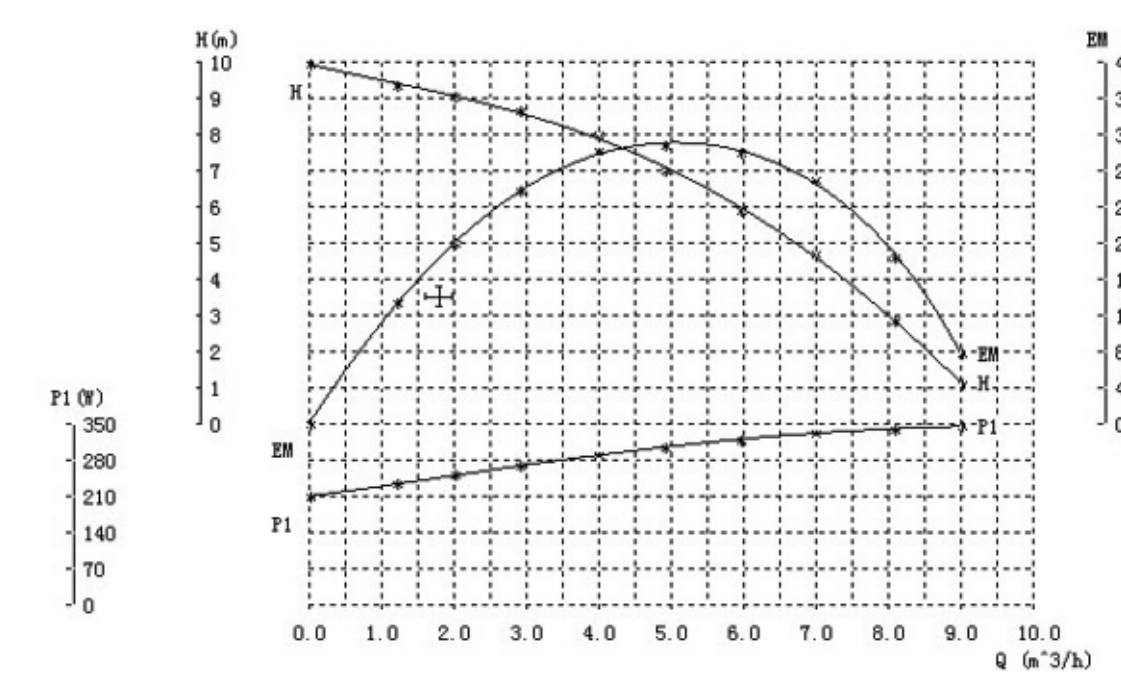

RS 25/12

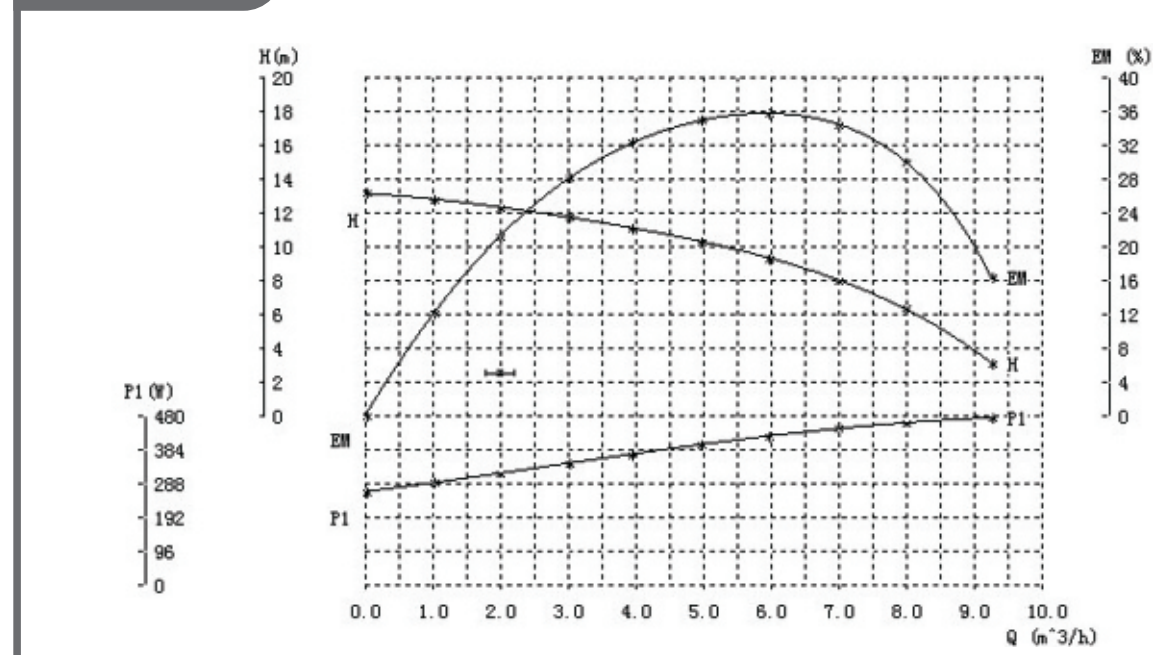

RS 32/12